

MSR Gold™ FastFit

MSR Gold™ 2000/2 FastFit 1CT



All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen lamps, switching between lamp technologies can be done quickly and easily.

Product data

• General Characteristics

System Description	FastFit
Cap-Base	PGJX50
Cap-Base Information	PGJX50
Operating Position	any
Main Application	Entertainment
Life to 50% failures	750 hr
EM	

• Light Technical Characteristics

Color Code	2
Color Rendering Index	88 Ra8
Color Temperature	7500 K
Color Temperature Technical	7500 K
Chromaticity Coordinate X	297 -
Chromaticity Coordinate Y	322 -
Luminous Flux Lamp EM	138000 (min), 160000 (nom) Lm
Luminous Efficacy Lamp EM	80 Lm/W

• Electrical Characteristics

Watts	2000 W
Lamp Wattage Technical	2000 W

Lamp Current	15.4 A
Ignition Supply Voltage	198 (min) V
Dimmable	Yes

• Luminaire Design Requirements

Pinch Temperature	500 (max) C
Bulb Temperature	950 (max) C


• Product Dimensions

Overall Length C	134 (max) mm
Diameter D	34 (max) mm
Width F	41 mm
Light Center Length L	66 (min), 67 (nom), 68 (max) mm
Arc Length O	8.0 mm

• Product Data


Product number	245605
Full product name	MSR Gold™ 2000/2 FastFit 1CT
Short product name	MSR Gold 2000/2 FastFit 1CT/8
Pieces per Sku	1
eop_pck_cfg	8
Skus/Case	8
Bar code on pack	8727900908305
Bar code on case	8727900908312
Logistics code(s)	928106105114
eop_net_weight_pp	0.147 kg

Dimensional drawing

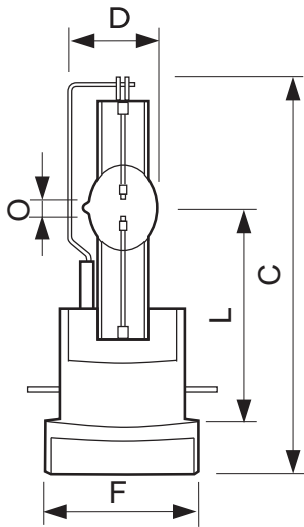

MSR Gold™ 2000/2 FastFit 1CT

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR GOLD 2000/2 FastFit	-	-	-	134	34	-	-	41	-	66	67	68	8.0



PGJX50



© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, December 28
data subject to change