

Quick-start guide

Lutron® Smart Bridge

Please read before installing

Contents supplied:

Lutron® Smart Bridge*
(L-BDG2 or L-BDGPRO2)
5 V \equiv 300 mA



Power Supply
(T-5DC-USB)

Input: 100–240 V \sim
50/60 Hz 100 mA
Output: 5 V \equiv 550 mA



Ethernet Cable



* Connected to a Class 2, LPS, or SELV, limited energy (<15 W) power source only.

Double your warranty


Love Lutron® products? Have ideas for making them better? Tell us what you think and we'll extend your warranty by 1 year.

www.casetawireless.com/register




1 Install the Lutron® Smart Bridge

A. Connect the Smart Bridge to your Wi-Fi router using the Ethernet cable.

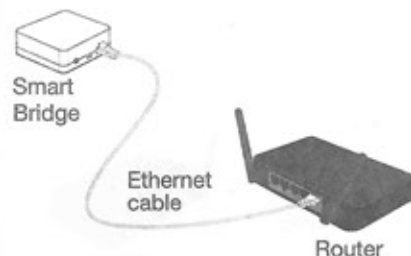

B. Connect the power cord to the Smart Bridge and plug it into an outlet.

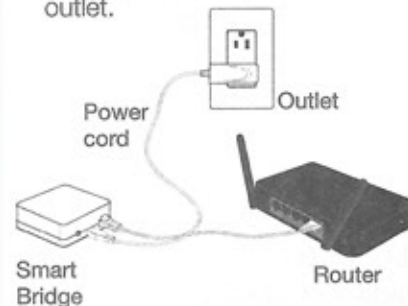

2 Download the Lutron® app and walk through setup



Search for "Lutron Caseta"



Lutron™

www.casetawireless.com/LutronApp


Apple is a trademark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries.



245-31-708

Warranty

For warranty information, please visit www.casetawireless.com/warranty

©Lutron and Lutron are registered trademarks and  is a trademark of Lutron Electronics Co., Inc. Google and the Google logo are registered trademarks of Google Inc., used with permission.

©2014–2015 Lutron Electronics Co., Inc.



P/N 0301812 REV A