


# HD3-915-3G-BLK-36

## Low Profile Heavy Duty ISM Antenna 902-928 MHz 3 dBi Peak

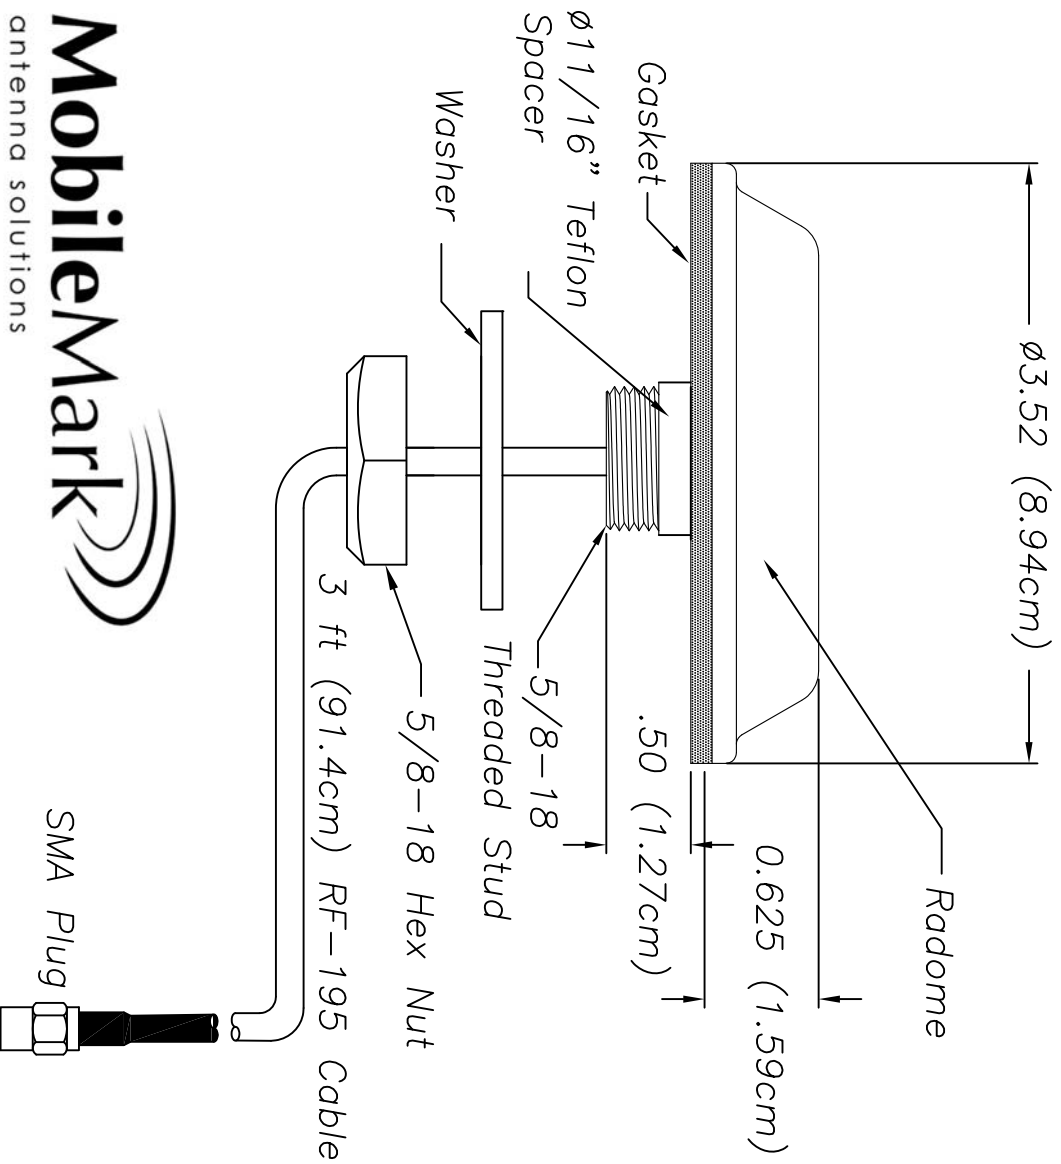

### Antenna Specifications

#### Electrical Properties:

Frequency: \_\_\_\_\_ 902-928 MHz  
Gain: \_\_\_\_\_ 3 dBi Peak  
Impedance: \_\_\_\_\_ 50 Ohm nominal  
VSWR: \_\_\_\_\_ Less than 2:1  
Input Power: \_\_\_\_\_ 10 Watts  
Polarization: \_\_\_\_\_ Vertical

#### Mechanical Properties:

Radome Material: \_\_\_\_\_ UV resistant ASA  
RF Connector Interface: \_\_\_\_\_ SMA Plug  
Mounting: \_\_\_\_\_ 5/8-18 x .50 Threaded Stud  
Dimensions: \_\_\_\_\_ .625" High x  $\phi 3.52$ " (8.94cm)  
Net Weight: \_\_\_\_\_ 8 oz (1/2 lbs) (226g)

# MobileMark

antenna solutions

US OFFICE & HEADQUARTERS: 1140 W. THORNDALE AVE., ITASCA, IL 60143  
TEL: (847) 671-6690 \* FAX (847) 250-5120  
UK OFFICE: 8 MIRAS BUS PARK, KEYS PARK ROAD, HEDNESFORD WS12 2FS, UK.  
UK TEL: (+44) 1543-459555 FAX (+44) 1543-459545  
VISIT OUR WEBSITE AT WWW.MOBILEMARK.COM