

RFID HD RooTenna® 10 X 10 Die-Cast Enclosure RFID Antennas



DCE ENCLOSURE OFFERS SIX OPTIONS OF INTEGRATED RFID ANTENNAS COVERING 860-960 MHz

The RFID HD RooTenna® from Laird Technologies is an innovative antenna system that gives the operator ultimate system flexibility. The Radome is UV resistant ASA plastic, the hardware is stainless steel, and the mounting plate inside for adding electronics is removable and customizable by the user.

The die-cast enclosure can be pole or wall mounted. A heavy duty tilt bracket is available for those installations requiring up or down tilt. Eleven (11) engineered knockouts are provided; nine sized for N connectors, and two sized for a cable feed through.

This series of antennas is available with a choice of six different circularly polarized UHF antennas integrated into the Radome cover. These antennas cover the standard 902-928 MHz, 865-868 MHz RFID frequencies, as well as a wide band version that covers 865-960 MHz. All are available in a choice of RH and LH circular polarization. These antennas feature very low VSWR, axial ratio, and a fixed SMA connector.

FEATURES

- 11 engineered knockouts
- IP 67 Rated
- Rugged and weatherproof
- Hinged cover for easy maintenance
- Choice of six high-performance, circularly-polarized antennas

MARKETS

- Outdoors
- Loading docks
- Warehouses
- Mast mounted
- Side of building
- Industrial / wet locations

global solutions: local support.™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com


Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

RFID HD RooTenna® 10 X 10 Die-Cast Enclosure RFID Antennas

ANTENNA PATTERN

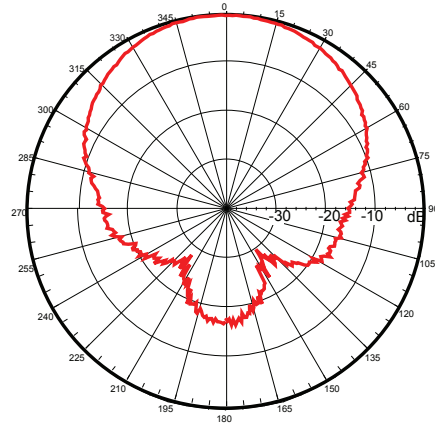

865 MHz 5.46 dBi Linear A

SPECIFICATIONS	DCE9028PR / L	DCE8658PR / L	DCE8658WPR / L
Frequency:	902-928 MHz	865-870 MHz	865-960 MHz
Gain:	9 dBic	8.5 dBic	8.5 dBic
3 dB Beamwidth	70° x 70°	70° x 70°	65° x 65°
Polarization:	Right or Left Hand Circular	Right or Left Hand Circular	Right or Left Hand Circular
VSWR:	<1.3:1	<1.5:1	<1.40:1
Front-to-Back Ratio	20 dB	18dB	18dB
Axial Ratio	1 dB	1 dB	1 dB
RF Connector:	SMA (female)	SMA (female)	SMA (female)
Power Rating:	10 W	10 W	3 W
Radome:	ASA	ASA	ASA
Dimensions:	12.5" x 10.4" x 3.9"	12.5" x 10.4" x 3.9"	12.5" x 10.4" x 3.9"
Weight:	2.4 kg	2.4 kg	2.4 kg
Operational Temperature:	-30°C to +75°C	-30°C to +75°C	-30°C to +75°C
Mount Style:	Wall / Mast / Tilt	Wall / Mast / Tilt	Wall / Mast / Tilt

SYSTEM ORDERING INFORMATION

DCE9028PRFSMF	HD RooTenna® enclosure with integrated Right hand CP 902-928 MHz 9 dBic panel antenna
DCE9028PLFSMF	HD RooTenna® enclosure with integrated Left hand CP 902-928 MHz 9 dBic panel antenna
DCE8658PRFSMF	HD RooTenna® enclosure with integrated Right hand CP 865-868 MHz 8.5 dBic panel antenna
DCE8658PLFSMF	HD RooTenna® enclosure with integrated Left hand CP 865-868 MHz 8.5 dBic panel antenna
DCE8658WPRFSMF	HD RooTenna® enclosure with integrated Right hand CP 865-960 MHz 8.5 dBic panel antenna
DCE8658WPLFSMF	HD RooTenna® enclosure with integrated Left hand CP 865-960 MHz 8.5 dBic panel antenna



ANT-DS-RFID-DCE 0409

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. All Laird Technologies' products are sold pursuant to the Laird Technologies' domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.