

## RESTORE END TABLE TOP

NEED HELP OR ADVICE ON PUTTING THIS KIT TOGETHER? MISSING PIECES?  
EMAIL US AT [SUPPORT@PIPE-DECOR.COM](mailto:SUPPORT@PIPE-DECOR.COM) FOR ANY QUESTIONS



Check the packaging label to determine which part number you have ordered.

This page of instructions only applies to the following part numbers:  
**OLDET01, OLDET02, OLDET03, OLDET04**

If your part number is not listed, see the other two pages to find the instructions that correspond with your product.

### TAKING CARE OF YOUR SOLID WOOD TOP


Restore by PIPE DECOR wood tops use a water-based polyurethane top coat, to protect and add sheen.

### CLEANING

Use a damp rag and/or gentle dish soap like Dawn. Wipe down your table and let it dry.

### DO NOT USE

Oil-based cleaners like Murphys oil soap or an excessive amount of water.

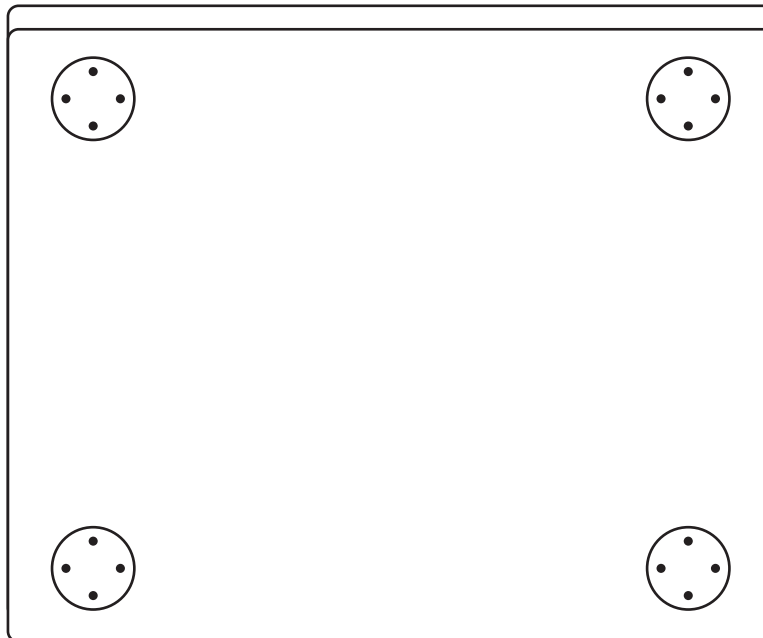

## RECOMMENDED LEG PLACEMENT

## RESTORE END TABLE SET


NEED HELP OR ADVICE ON PUTTING THIS KIT TOGETHER? MISSING PIECES?  
EMAIL US AT [SUPPORT@PIPE-DECOR.COM](mailto:SUPPORT@PIPE-DECOR.COM) FOR ANY QUESTIONS

**BEFORE  
YOU  
START**

Check the packaging label to determine which part number you have ordered.

This page of instructions only applies to the following part numbers: **370ET01, 370ET02, 370ET03, 370ET04**

If your part number is not listed, see the other two pages to find the instructions that correspond with your product.

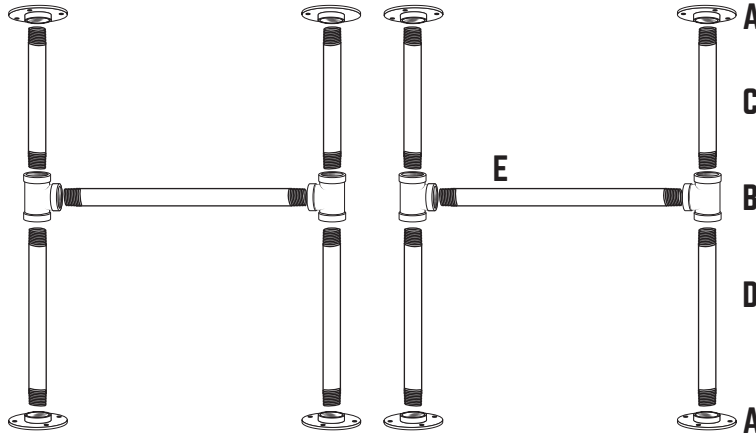

### PARTS LIST

A- 1/2" FLANGES	8 (QTY)
B- 1/2" TEES	4 (QTY)
C- 1/2" 10 IN. PIPE	4 (QTY)
D- 8" PIPE	4 (QTY)
E- 12" PIPE	2 (QTY)

### ALSO INCLUDED

WOOD TABLE TOP SCREWS	1 (QTY) 16 (QTY)
--------------------------	---------------------

## ! HOW TO PREVENT PIPE CORROSION

PIPE DECOR industrial-grade black pipes and fittings are coated with a rust-preventive oil during manufacturing. For best results, **SEAL THE PIPES TO AVOID ANY RUSTING** after cleaning the kit.

### CLEAN AND SEAL INSTRUCTIONS:

**CLEAN:** Recommended supplies: regular degreasing dish soap, washcloths, gloves (optional)


1. Wash your pipes and fittings with warm water and dish soap until the oil is completely removed.
2. Wipe the pipes with a dry washcloth and wait until the pipes are completely dry.

**IMPORTANT: THE PIPES MUST BE COMPLETELY DRY BEFORE YOU START THE SEALING PROCESS.**

**SEAL: IF USING POLYURETHANE SPRAY:** Spray each dry pipe and fitting with a polyurethane matte or satin finishing spray and let it dry before assembling the kit.

**IF USING FINISHING WAX:** Coat each dry pipe with a finishing wax. Wait for 20 minutes, then polish the pipe with a dry washcloth by wiping them down. Faster wiping will result in a shinier finish.

## RECOMMENDED TOOLS FOR INSTALLATION




### INSTALLATION INTO WOOD TOP

1. Put Legs together as shown above. Hand tightening each flange to the pipe.
2. Using a drill, screw legs into the bench. We recommend using setting #10 to prevent stripping the wood. There is no need to pre-drill.
3. You can untighten each flange to help level the table.

### CLEANING AND TAKING CARE OF YOUR SOLID WOOD TOP

Restore by PIPE DECOR wood tops use a water-based polyurethane top coat, to protect and add sheen. Use a damp rag and/or gentle dish soap like Dawn. Wipe down your table and let it dry. **DO NOT USE** Oil-based cleaners like Murphys oil soap or an excessive amount of water.

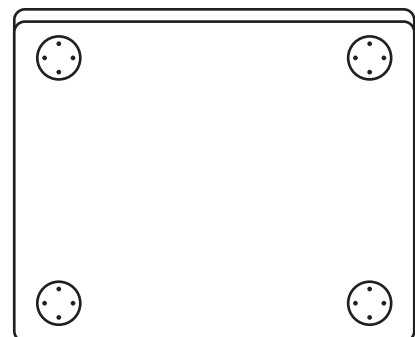

### RECOMMENDED FLANGE PLACEMENT