


# CIRCLITE





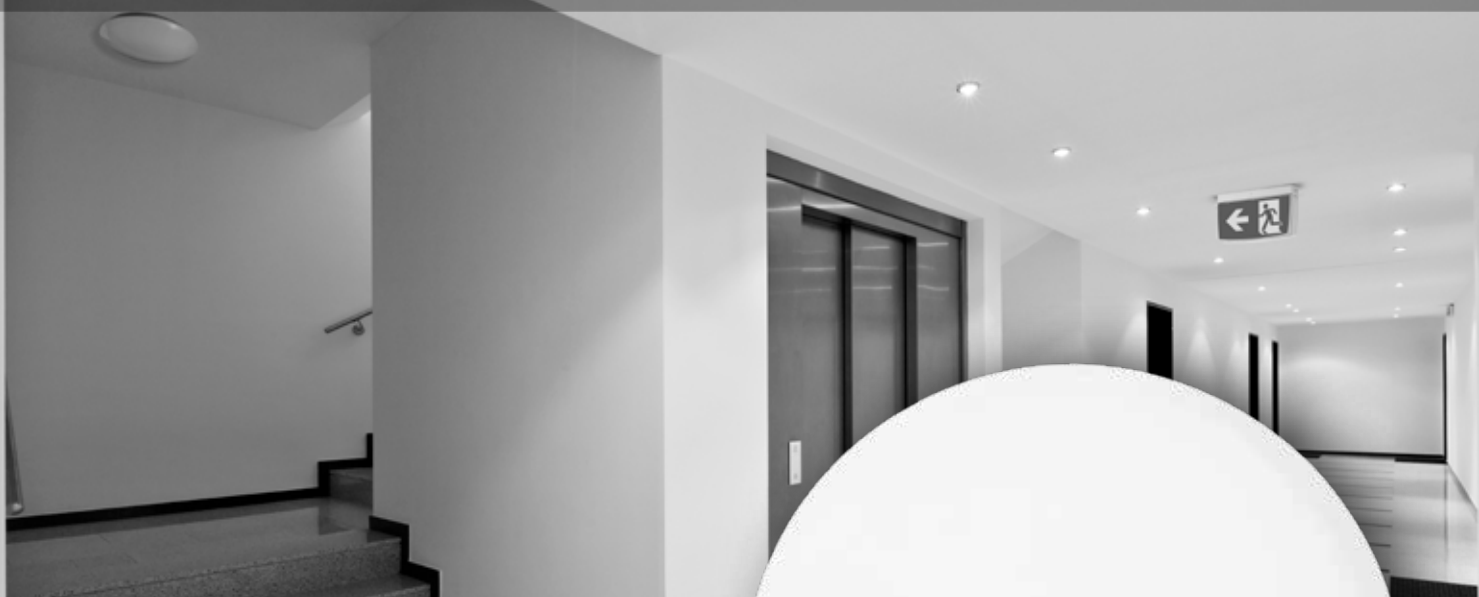

## LED Circular Emergency light

The Circlite is an IP44 rated luminaire that is ideal for applications such as corridors, stairwells and walkways.

Constructed with a polycarbonate body and opal acrylic diffuser and with a large terminal block the Circlite is also easy to install.


With an emergency classification of D32, LED technology and available with microwave sensor technology the Circlite is a leader in this space.

### Applications


-  Office Buildings
-  Car Parks
-  Public Amenities
-  Railway Stations
-  Schools
-  Sports Facilities

### Features and Benefits


- AS/NZS 2293.3 compliant
- D32 emergency classification
- IP44
- LED lamps
- Lithium Iron Phosphate
- Microwave sensor options
- Large terminal block




LED




D32




Surface Mount



Maintained



LFP



IP44

# CIRCLITE

ORDERING INFORMATION	TS	TS	240V	240V
Standard	ECLLED-LI	ECLLED-LI-MS	FCLLED	FCLLED-MS
Carton Quantity	5			
Weight - Single (Carton)	2.2kg (13kg)			
Dimensions (Diameter x Height)	340mm x 100mm			

POWER, LAMPS AND BATTERY	TS	TS	240V	240V
Power Consumption (Standby / Max)	0.6W / 16W	1.1W / 16W	14W	1.6W / 15W
Lamp(s) (CCT / Life)	LED Module 4000K / 30,000hrs (L70 / B50)			
Nominal Lumen Output	1340lm	1340lm	1340lm	1340lm
Battery	Lithium Iron Phosphate		-	-
Voltage / Capacity (mAh)	3.2V / 3000mAh		-	-
Charging Method	Intelligent current limited constant voltage		-	-

TECHNICAL SPECIFICATIONS	TS	240V
Operating Mode	Maintained	Non-Emergency
Voltage (V) (Frequency (Hz))	220-240V (50Hz)	
Operating Temperature	1°C to 40°C	
Ingress Protection Rating (IP)	IP44	


CLASSIFICATION	TS
C0	D32
C90	D32

## SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7	20.6	20.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:  
<https://clevertronics.com.au/spacing-tables/>

\*Warranty information located at:  
<https://clevertronics.com.au/warranty-statement/>

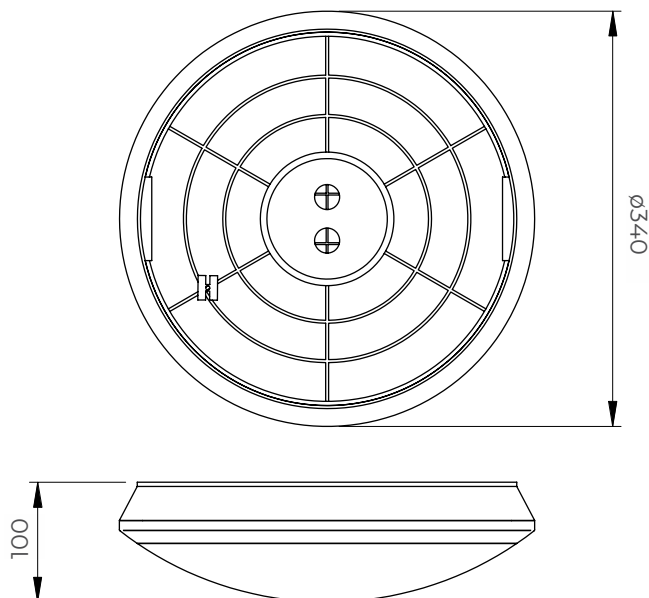

Dimensions (mm)

**clevertronics.co.nz**  
**clevertronics.com.au**

1 Caribbean Drive, Scoresby VIC 3179  
 P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.  
 All features and specifications are subject to change without prior notice.  
 \_PRODUCT SHEETS – ANZ Circlite 04OCT22

