




ÖLFLEX® HEAT 125 C MC

Electron beam cross-linked cables for more demanding application requirements

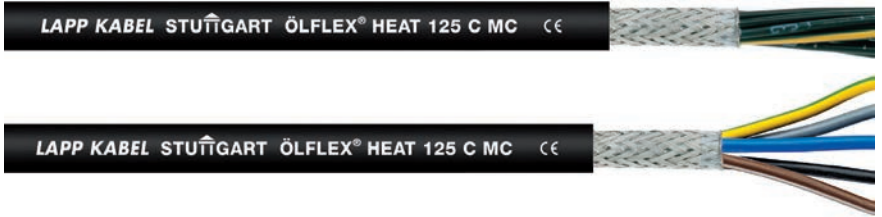

- Info**
- Substitutes previous ÖLFLEX® HEAT 145 C MC
 - Improved characteristics in the event of a fire
 - GL - Germanischer Lloyd approved

Benefits

- For safety in areas with high density of people
- Reduction of flame propagation, density and toxicity of smoke gases in event of fire
- Minimises damage to buildings and equipment caused by the formation of toxic acid fumes in fires
- Certified for maritime applications
- Copper braiding screens the cable against electromagnetic interference

Application range

- For outdoor applications
- For the wiring and connection of lighting, heating appliances, control cabinets, and distributors in mechanical and plant engineering
- For use in traffic regulation systems and outdoors
- Coil winding, electromagnets, pumps, electrical systems
- Heat Treatment plants, pressure die casting, heating and cooling technology

Accessories

- SKINTOP® MS-SC-M refer to page 732
- SKINTOP® MS-SC refer to page 794
- EASY STRIP stripping and cutting tool refer to page 1004
- SKINTOP® MS-M BRUSH refer to page 733
- SILVYN® EMC AS-CU refer to page 899
- STAR STRIP stripping tool refer to page 1000

Product features

- Fire behaviour:
 - Halogen-free (IEC 60754-1)
 - No corrosive gases (IEC 60754-2)
 - Low smoke density (IEC 61034-2)
 - Flame-retardant (IEC 60332-1-2, NF C 32-070 (C1) and NF-F 16-101 (Class C))
 - Low toxicity (EN 50305)
- No flame-propagation according to IEC 60332-3-22, IEC 60332-3-24 and IEC 60332-3-25 (Flame spread on vertical cable bundle)
- Oil-resistant acc. IEC 60227-1 (ST9) and EN 50264-1 (EM 104)
- UV-resistant according to ISO 4892-2
- Ozone-resistant according to EN 50396

Norm references / Approvals

- GL - Germanischer Lloyd approved
- Based on EN 50525-3-21 and EN 50525-3-41

Product Make-up

- Fine-wire, tinned-copper conductor
- Electron beam cross-linked polyolefin copolymer insulation
- Cores twisted in layers
- Tinned-copper braiding
- Outer sheath: electron beam cross-linked polyolefin copolymer, black

Technical data

- Classification**
ETIM 5.0 Class-ID: EC000104
ETIM 5.0 Class-Description: Control cable
- Core identification code**
Colour-coded according to VDE 0293-308, refer to Appendix T9 or black with white numbers refer to article table
- Specific insulation resistance**
>2 TOhm x cm
- Conductor stranding**
Fine wire according to VDE 0295, class 5/IEC 60228 class 5
- Minimum bending radius**
Occasional flexing: 15 x outer diameter
Fixed installation: 5 x outer diameter
- Nominal voltage**
Up to 1.0mm² U₀/U 300/500 V
From 1.5mm² U₀/U 450/750 V
0.6/1kV from 1.5 mm² in the case of fixed and protected installation
- Test voltage**
C/C 4000 V, C/S 2500 V
- Protective conductor**
G = with GN-YE protective conductor
X = without protective conductor
- Temperature range**
Occasional flexing: -35 °C to +120 °C
Fixed installation: -55°C to +125°C
Temporary (3.000h): up to +145°C

Article number	Number of cores and mm ² per conductor	Outer diameter (mm)	Copper index (kg/km)	Weight (kg/km)
ÖLFLEX® HEAT 125 C MC 300/500 V - colour-coded				
1024400	2 X 0.5	6.8	41	45
1024401	3 G 0.5	7.1	45.5	59
1024407	2 X 0.75	7.2	46	79
1024408	3 G 0.75	7.6	57.9	96
1024409	4 G 0.75	8.4	64	116
1024410	5 G 0.75	9.1	77.4	139
1024415	2 X 1	7.4	56	90
1024416	3 G 1	8.0	65.3	104
1024417	4 G 1	8.6	78.1	129
1024418	5 G 1	9.6	89.4	153
ÖLFLEX® HEAT 125 C MC 450/750 V - colour-coded				
1024423	2 X 1.5	8.6	65	114
1024424	3 G 1.5	9.1	83	132
1024425	4 G 1.5	10.0	100	163
1024426	5 G 1.5	11.1	125	200
1024433	2 X 2.5	10.0	112	157
1024434	3 G 2.5	10.7	146	198
1024435	4 G 2.5	11.6	167	236
1024436	5 G 2.5	12.9	200	287
1024441	4 G 4	13.7	237	317
1024446	4 G 6	15.1	318	404
1024451	4 G 10	19.3	558	669

Article number	Number of cores and mm ² per conductor	Outer diameter (mm)	Copper index (kg/km)	Weight (kg/km)
ÖLFLEX® HEAT 125 C MC 300/500 V - Black with white numbers				
1024480	2 X 0.75	7.2	46	79
1024481	3 X 0.75	7.6	57.9	96
1024482	4 X 0.75	8.4	64	116
1024411	7 G 0.75	10.0	102	186
1024483	7 X 0.75	10.0	102	186
1024412	12 G 0.75	13.4	177	219
1024484	2 X 1	7.4	56	90
1024485	3 X 1	8.0	65.3	104
1024419	7 G 1	10.3	113.3	211
1024420	12 G 1	14.0	188.1	266
ÖLFLEX® HEAT 125 C MC 450/750 V - Black with white numbers				
1024486	2 X 1.5	8.6	65	114
1024487	4 X 1.5	10.0	100	163
1024427	7 G 1.5	12.0	149	273
1024488	7 X 1.5	12.0	149	273
1024428	12 G 1.5	16.3	280	371
1024489	3 X 2.5	10.7	146	198
1024490	4 X 2.5	11.6	167	236
1024437	7 G 2.5	14.4	288	385
1024438	12 G 2.5	19.3	477.3	569

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.
Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.
Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths
Packaging size: coil ≤ 30 kg or ≤ 250 m, otherwise drum
Please specify the preferred type of packaging (e.g. 1 x 500 m drum or 5 x 100 m coils).
Photographs are not to scale and do not represent detailed images of the respective products.