

1 2 3 4 5 6

A

A

B

B

C


C

D

D

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		SSL100M			
MATERIAL		HOUSING-AL LENS-PC			
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE()			
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.280A
			DC24V		MAX. 0.151A
			AC110V		MAX. 0.040A
			AC220V		MAX. 0.040A
PROTECTION GRADE		WATER & DUST PROOF IP68			
CONNECTOR		M12-5PIN			
COLOR OF HOUSING		MAKER STANDARD			
ACTION		LED STEADY			

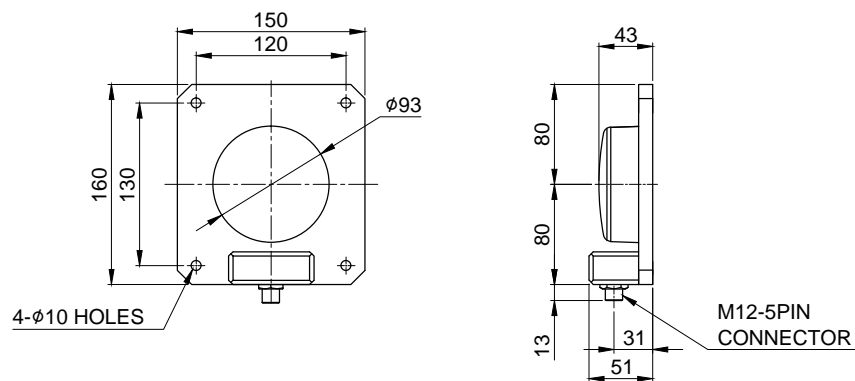

	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	Ⓢ	v		
FOR LINEAR DIMENSIONS	0.5-3	±0.05	±0.1	±0.2	-	
	3-6			±0.3	±0.5	
	6-30	±0.1	±0.2	±0.5	±1	
	30-120	±0.15	±0.3	±0.8	±1.5	
	120-400	±0.2	±0.5	±1.2	±2.5	
	400-1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0-10	±1°		±1°30'	±3°	
	10-50	±0°30'		±1°	±2°	
	50-120	±0°20'		±0°30'	±1°	
	120-400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/ NAME		MAT'L	1	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE		
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30		
TITLE				MODEL			
SSL100M OUTLINE DRAWING				SSL100M			
				DWG. NO.			
				SSL100M_OUT			
SCALE	SIZE	REV	SHEET				
N/S	A4	00	1/1				

1 2 3 4 5 6

A4(297X210)