

Installing Blower Accessory

PRO-COM Fan/Blower Accessory Model PF06-YJLF-A,

B

Step1: Disconnecting Wall Mounted Heater

Wall mounted heater must be disconnected from gas supply and removed from wall before installing fan accessory. Contact a qualified service person to do this. Follow all codes.

Step2: Removing Knock-out panel from back of heater

Removing the Knock-out panel at the four tabs with a Philips head screwdriver. (see Figure 1)

Step3: Attaching Fan/Blower Assembly.

Attaching Fan/Blower to the rear panel of the heater using the four screws provided. (see Figure 2).

Step4: Fan operation

To operate the Manual unit, turn on/off switch to the on position. To operate the Automatic unit, turn AUTO/O/MAN to the desired position, Man position will remain constantly on. Auto position will be controlled by the sensor no fan blower unit. Sensor will be activated when the temperature of sensor head reach $40\pm 5^{\circ}\text{C}$ after the heater was started. To stop the operation, turn unit switch to the O position (see Figure 3).

Step5: Grounding And Extension Cord Use this Fan/Blower accessory must be grounded.

This unit comes with a 3 prong grounding plug for your protection against electrical shock. Use standard, 3 holes, grounded outlet. If an extension cord is needed it must have a 3 prong plug and a 3 hole receptacle. An undersized cord will cause a drop in live voltage and could result in loss of power and overheating. (see Figure 4).




Figure 2

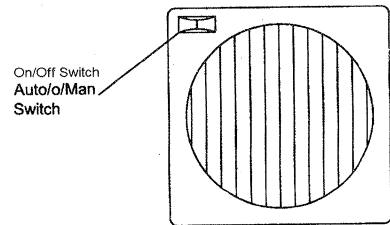


Figure 3




Figure 4

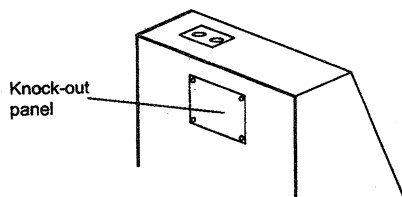


Figure 1