

13200A-LED

3" IC Airtight New Construction LED Housing

Product Description

The 13200A-LED features IDEAL connections that allows for quick, snap-in connection of NICOR® D-series LED downlights. Suitable for new construction in residential and commercial applications. IC rated. Suitable for direct contact with insulation.

Housing

- Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas
- Washington State Energy Code approved to meet restricted airflow requirements
- 4 1/2" height allows use in 2" x 6" joist construction

Plaster Frame

- Housing is secured to plaster frame with screws and can be removed for access to junction box
- Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness

Junction Box

- Listed for through branch circuit wiring and includes several 3/4" knockouts
- Four pryouts with integral strain relief simplify Romex installation
- Supplied with three push-in wire connectors

Hanger Bars

- Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws
- Unique hanger bar lip design helps align can to joist
- Four double-headed captive nails provide for ease of installation
- Bars can be repositioned 90° on plaster frame without tools
- Score lines allow bars to be shortened without tools to accommodate a 12" joist span



Ordering Information

Catalog Number	Description
13200A-LED	3" IC Airtight New Construction LED Housing

Project

Catalog

Type

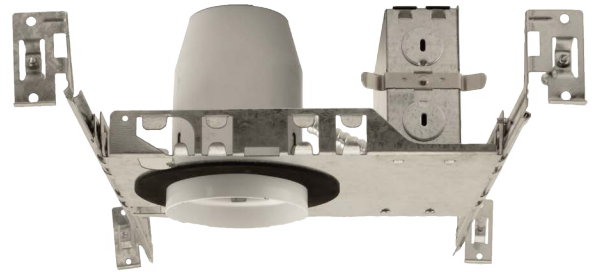

IDEAL Connector

