



RIKU ROCKING CHAIRS

It is useful to refer to the photographs in the brochure when assembling your furniture.


The seat part comes made up and is numbered on the side. The leg assembly must have a matching number on the box.

Bolt the legs/armrest assembly to the seat using a 14mm socket spanner, please refer to pic 1. The longer bolts go through the armrests into the back of the seat, the other bolts go four either side through the legs into the seat part. Fit foot bar into holes in the front of the leg pieces before completing the bolting of the second leg piece. In the case of the double rocker fit the foot pole through the support piece and attach to the underside of the centre of the seat, refer to pic 2. Then bolt the springs either side onto the inside of the leg using a 10mm spanner as marked.


Finally bolt the assembly to the inside of the base. Make sure that the front of the seat is facing in the same direction of the arrow on the base part. The base should have the rounded edges on the top of the frame. Refer to pic 3. The distance of the front of the frame is less than at the back of the frame.



Picture 1

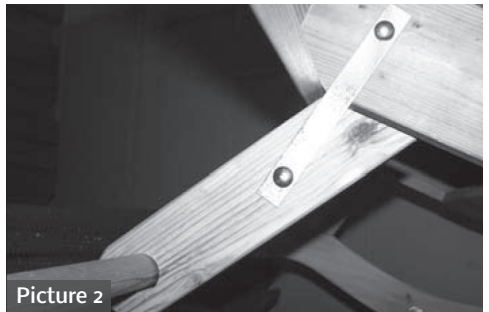

Picture 2

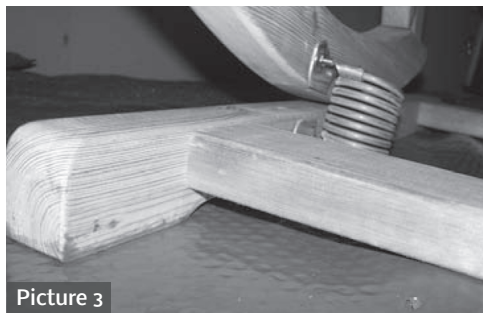

Picture 3

DON'T FORGET TO PAINT ON THE FURNITURE PROTECTOR AS SOON AS THE PRODUCT IS ASSEMBLED, UNLESS ANOTHER FINISH IS TO BE APPLIED.



Sustainably
Sourced &
Ergonomically
Designed

www.pepegarden.co.uk

