

BAJARACK WARRANTY

This Limited Warranty covers BajaRack products and all accessories for a period of 2 years from the date of purchase to the original owner of the product and does not apply once the equipment is sold or transferred to another person.

This Warranty does not cover the cost of removal of reinstallation or the product. BajaRack warrants (subject to conditions listed in this warranty) all products to be free of manufacturing defects in materials and workmanship.

Warranty claim requirements

The claim has to be submitted during the warranty period at the place of purchase or directly at our corporate office located:



BajaRack Adventure Equipment
2275 Michael Faraday Drive, Suite 6
San Diego, CA 92154 USA
Phone Number: 760-621-0171

On your product you will find a label with a serial number. If you remove this label, please save the serial number in a safe place. You will need it if you want to make a warranty claim in the future. Any cost incurred to transport the defective product "to and from" will be the customer's responsibility.



Warranty resolution

Subject to BajaRack inspection of the product, the company will remedy defects in materials and/or workmanship by repairing or replacing, at BajaRack's option, the defective product without charge for parts or labor, subject to the limitations and exclusions described in this warranty. BajaRack may elect, at its option, not to repair or replace a defective product, in which case BajaRack will issue to the original retail purchaser, at BajaRack's option, either a full refund equal to the purchase price paid for the product, or a credit to be used toward the purchase of new BajaRack products or accessories.

Limitations of Liability

BajaRack is not liable for damage caused by shipping or transport of BajaRack products. It is the responsibility of the original retail purchaser to inspect all products prior to acceptance and to notify the shipping carrier in a timely manner so that any claim for damages can be made. If timely notification to the shipping carrier by the original retail purchaser is not made regarding damage caused during the transport of the product, a claim for damages may not be possible, and all liability falls to the original retail purchaser. This warranty does not apply if accident, abuse, misuse, collision, overloading, modification, misapplication, improper installation, or improper service has damaged the Product.

BAJARACK SHALL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, INCIDENTAL, SPECIAL, EXEMPLARY, OR PUNITIVE DAMAGES OR FOR ANY OTHER DAMAGES OF ANY KIND OR NATURE [NO PERIOD.] (INCLUDING, BUT NOT LIMITED TO, LOST PROFITS, DOWN TIME OR LOSS OF USE) UNDER ANY LEGAL THEORY, EVEN IF BAJARACK WAS ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BAJARACK'S SOLE LIABILITY IS LIMITED TO THE REMEDY SET FORTH ABOVE.

BajaRack reserves the right to change Product design without notice.




AXE AND SHOVEL MOUNT

FOR TOYOTA FJ AND 4RUNNER G5
FACTORY RACK



Axe&Shovel mount for Toyota FJ and 4RG5 Factory Rack

RACK COMPONENTS

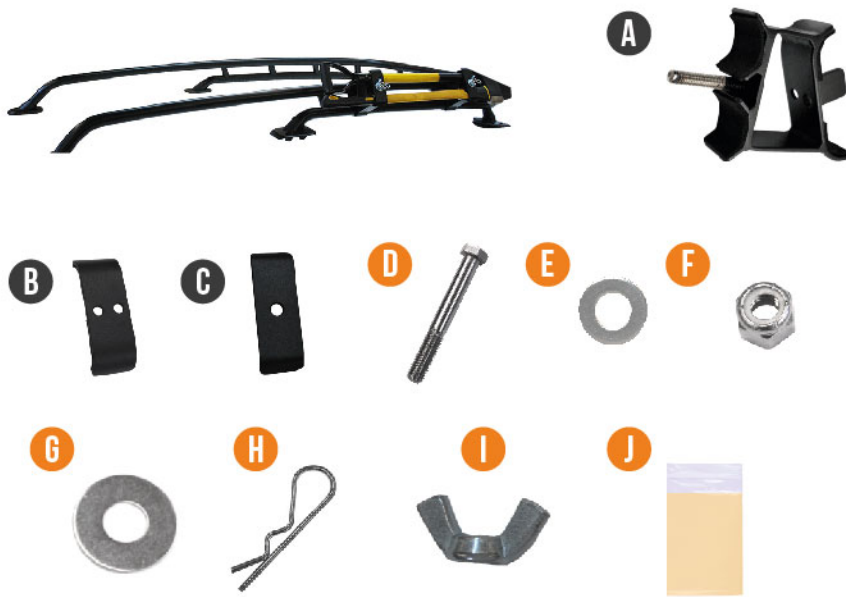

A) Ashovel mount (2x)
 B) Ashovel Plate (2x)
 C) Secure Plate (2x)

What's in the box

D) Bolts 3/8" x 3" (4x)
 E) Washers 3/8" (8x)
 F) Nylon Lock Nut 3/8" (4x)
 G) Washer 1/2" (2x)
 H) Lock pin (2x)
 I) Wing nut 1/2" (2x)
 J) Grease, for use with all bolts with lock nuts (1x)

Recommended Tools

- 9/16" wrench for installation
- 9/16" ratchet tool for support

INSTALLATION STEPS

- 1 Place the Ashovel mount (A) on the preferred side of your Toyota FJ OEM basket (left or right). Depending on the size of your axe and shovel accessory you can determine the distance between the two Ashovel mounts (A).



- 2 Once you have determined an appropriate location for your base mounts, attach the Ashovel plate (B) on the rear and insert bolt (D) and washer (E) as shown above photo.



Note: Please, remember add grease (J) over bolts (D).

- 3 Insert washers (E) and locknuts (F) in bolts and tighten.



- 4 Repeat steps 1 to 3 for other side.



INSTALLATION STEPS

- 5 Place the axe and shovel accessory over Ashovel mounts (A) as shown in above photo.



- 6 Insert secure plate (C) in bolts of Ashovel mounts. Insert washer (G) and wing nut (I) and tighten with hands. Then insert lockpin as shown in above photo. Repeat for other Ashovel mount.



ENJOY
— YOUR NEW —
AXE & SHOVEL MOUNT
ACCESSORY!



TECHNICAL SPECIFICATIONS

AXE AND SHOVEL MOUNT

BR-ASHOVEL-TYOEM-0

For Toyota FJ and 4RG5 Factory Rack



Material and Thickness: 1/8 Inch (3.175 mm) and 3/16 Inch (4.7 mm) steel.

Finish: Epoxy primer (rust barrier) with black powder coating

Mounting Method: Clamps install directly on the sides of Toyota FJ factory rack.