



### DS50PV-1000/51

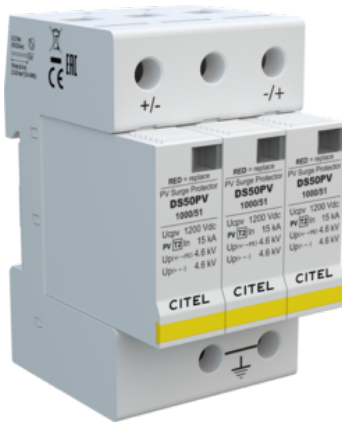

- Type 2 surge protector for PV
- In : 15kA / I<sub>max</sub> : 40kA
- Pluggable
- Remote signaling (option)
- EN 61643-31 / EN 50539-11 compliant

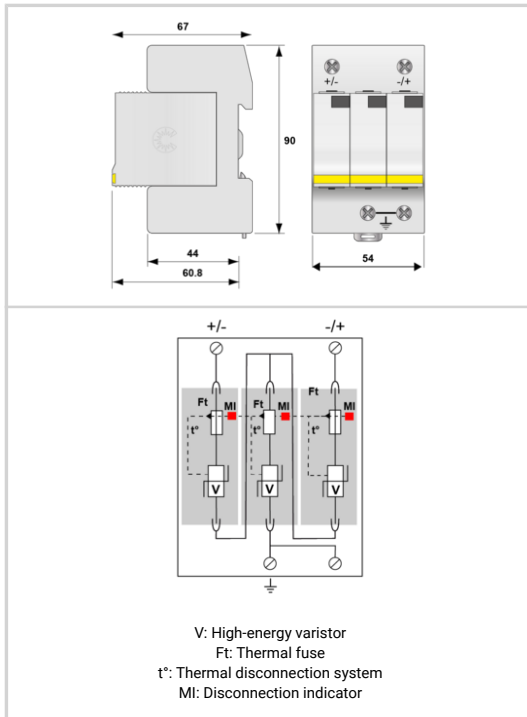

Electrical Characteristics	
SPD type	2
Network	PV network 1000 Vdc
Nominal PV voltage	U <sub>ocstc</sub> 1000 Vdc
Max. PV operating voltage	U <sub>cpv</sub> 1200 Vdc
Residual Current Leakage current to Ground	I <sub>pe</sub> < 0.1 mA
PV Permanent Operating current Current consumption at U <sub>cpv</sub>	I <sub>cpv</sub> < 0.1 mA
Follow current	I <sub>f</sub> None
Nominal discharge current 15 x 8/20 μs impulses	I <sub>n</sub> 15 kA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub> 40 kA
Current withstand short circuit PV	I <sub>scpv</sub> 15 000 A
Connection mode(s)	+/-/PE
Protection mode(s)	Common/Differential mode
Protection level +/-PE (-/PE)@ I <sub>n</sub> (8/20μs)	U <sub>p</sub> 4.6 kV
Mechanical Characteristics	
Technology	MOV
Connection to Network	By screw terminals: 2.5-2.5mm <sup>2</sup>
Format	Plug-in modular box
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	T <sub>u</sub> -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection SPD of the PV line
Disconnection indicator	1 mechanical indicator by pole
Spare module(s)	DSM50PV-1000/51
Remote signaling of disconnection	Option DS50PVS-1000/51 output change over contact
Dimensions	See diagram
Weight	0.318 kg
Disconnectors	
Thermal disconnector	Internal
Fuses	Without
Standards	
Standards compliance	EN 61643-31 / EN 50539-11
Certification	EAC
Part number	
480321	