




AB-HSM168-Y

High Impact Energy  
Absorbing Bollard



The Essential First Step

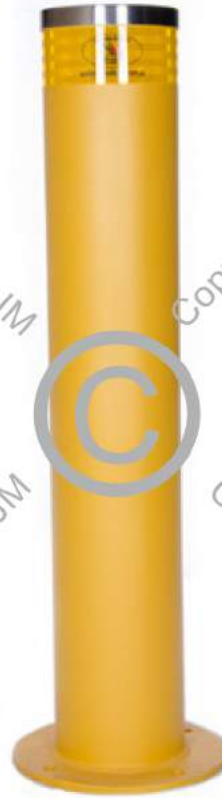

Post Dimensions	168mm (DIA) x 6.4mm (Wall Thickness) x 1000mm (Height)
Base Dimensions	280mm x 10mm (Thickness) with 4 x 18mm holes.
Material	Galvanized Steel, Metallic Powder Coated.
Installation	Surface Mounted. <u>Recommendation</u> : Chemical Anchors.
Weight	32Kg
Engineer Certification	Locking fixtures are certified into concrete post tension slabs 150mm thick.
Additional Notes	<p>Bollards comes with finished finish stainless steel cap and Australian Bollards branded reflective tape.</p> <p>These bollards are specifically designed to protect in high risk areas such as shopfronts, warehouses, banks, public cafe, street cafe &amp; complement the Omni Bollards.</p>