AustralianBollards.com.au e-ds.com.au

Registered Builders CB-U6782 DB-U3444 MBAV8367









Semi Automatic Bollard


















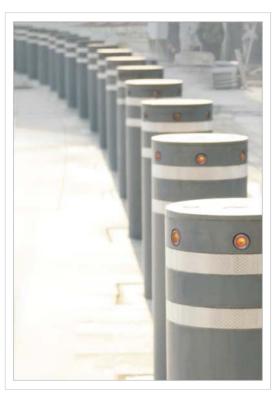

The Semiautomatic Retractable Bollard has been designed to control access to a site with a high level security, guranteeing pedestrian access whilst blocking the area to road traffic.

Its main features are:

- A.Manufactured from stainless steel or steel
- **B.**Available in the same styles as Electromechanical and Pneumatic bollards to save on cost.
- C.Bollard is raised by a gas spring.
- **D.**High impact strength and easy installation. No power supply needed.
- E.Height above ground:600mm/750mm/900mm
- F.Different color reflective tape (optional)

Parameters	
Operation mode	semi-automatic
Material	304/316 Grade Stainless Stee
Diameter	114/168/220mm
Height	600/750/900mm
Surface treatment	polished
Key	traingular
Reflective tape	2*3mm
Reflective tape color	optional

Other heights , diameters and colors available on request $% \left(1\right) =\left(1\right) \left(1\right) \left($

Colours

