


## WWSF

"WWSF" series 900 x 700 mm WHEEL WEIGHING PADS

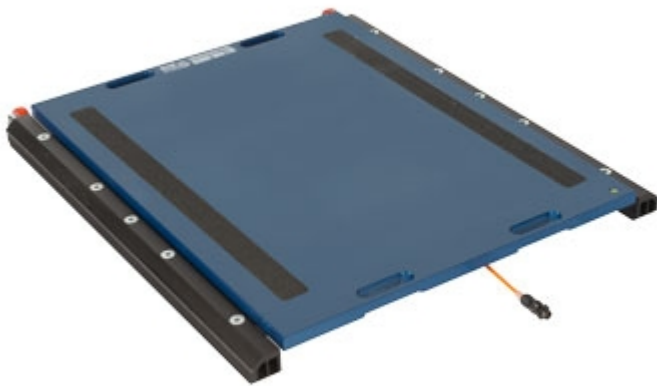

Pads designed to create weighing stations for large sized vehicles fitted with twinned wheels (articulated lorries, tractor-trailers, building yard vehicles, etc.); fitted with handles on both sides for easing the transport and the positioning. Particularly suitable for dynamic weighing.

Working in cooperation with:

**LIBRATECH APS**

L. FRANDSENSVEJ 2A - 5600 - FAABORG - DENMARK  
Tel. +45 7370 8574  
[www.libratech.dk](http://www.libratech.dk)

The best solution  
for advanced industrial  
applications

## FEATURES

- Pan dimensions: 900x700mm
- Weighing area: 750x515mm
- Overall dimensions: see technical drawing
- Weight: approximately 67kg.
- Fitted with double handles on both sides for easy handling.
- Fitted with wheels for pad transport.
- Sturdy structure, made in special aluminium, which guarantees lightness and makes these suitable also for harsh working conditions.
- 10 m PUR cable, with IP68 connector on platform side and new M12 connector on weight indicator side.
- IP68 stainless steel load cells.
- Hermetic junction box with IP68 protection rate.
- Special vulcanised nonslip rubber applied under the pad for good grip on all surfaces.
- Extremely simple and reliable connection of the scale to the weight indicator.
- Available in legal for trade approved version.
- Available in high resolution version.
- Available upon price estimate in Atex version for 1&21 e 2&22 zones.

## CE-M APPROVED VERSIONS

- The pads are for legal for trade use:
  - In the single-pad systems, not used to weigh vehicles.
  - In the wheel weighing systems in which the number of pads is equal to the number of vehicle wheels.
  - In the axle weighing systems composed of one or more multiples of WWS pads, except possible limitations of use for some European States.
- The axle weighing systems with 2 WWS pads and a 3590E "AF09" weight indicator are OIML R134 certified for the dynamic vehicle weighing, according to the legal standards in force in the Country of use.
- The CE-M legal for trade divisions indicated in the "version" table are available with ECEM option. ECEM option is needed for each legal for trade pad of the system.
- Legal for trade systems with more than one WWS, are fitted with the approval of the weight sum and related division:  
Exemple for a 4 pads system  
Single CE-M Pad: Max=1500kg and e=0,5kg  
CE-M SUM: Max=6000kg and e=2kg

---

AXLE WEIGHING SYSTEM INSTALLATION:



## DETAIL 1



## VERSIONS

### Available versions

Codice	l x w x h (mm)	Max (kg)	d (kg)	<b>M</b> (kg)	d HR (kg)*	Note
WWSF10T-2	900x700x75	10000	5	5	0,5	Price for single platform
WWSF15T-2	900x700x75	15000	5	5	0,5	Price for single platform
WWSF20T-2	900x700x75	20000 (15000**)	10	10	1	Price for single platform
WWSF25T-2	900x700x75	25000	10	--	1	Price for single platform

(\*) These divisions are obtainable only with the relative options

(\*\*) With ECEM legal for trade approval , Max=15000kg



[www.diniargeo.com](http://www.diniargeo.com)

“YOUR WORLDWIDE PARTNER FOR WEIGHING”

DINI ARGEO  
FRANCE sarl  
France

DINI ARGEO  
GMBH  
Germany

DINI ARGEO  
UK Ltd  
United Kingdom

DINI ARGEO WEIGHING  
INSTRUMENTS Ltd  
China

DINI ARGEO  
OCEANIA  
Australia



**COMPANY HEADQUARTERS**

Via Della Fisica, 20  
41042 Spezzano di Fiorano - Modena - Italy  
Tel. +39.0536 843418

**LIBRATECH APS**

L. FRANSENSVEJ 2A - 5600 - FAABORG - DENMARK

Tel. +45 7370 8574

[www.libratech.dk](http://www.libratech.dk)

SALES AND TECHNICAL ASSISTANCE SERVICE