

TigerFence

TigerFence brings speed, precision, and productivity to your table saw. It adds automation that can be controlled from one side of the fence, and has a repeatable accuracy of +/- .003 inches (.07mm).



TigerStop[®]
fast and accurate...every time



Fast and Accurate

Fully Automated Rip Fence For Your Table Saw

Walking around your sliding table saw to adjust a manual fence may seem like a small inconvenience, but over the lifetime of the saw, it adds up to serious wasted time and money.

No More Set Up Time

TigerFence moves to the desired dimension at the press of a button. No more walking to adjust a manual fence, measuring and marking material, and wasting precious labor hours.

Adaptable

If you need more production, don't buy a new saw. Turbocharge your existing table saw with TigerFence! TigerFence can easily attach to almost any table saw.

Easy to Train

An unskilled operator can be trained to use TigerFence to accurately position material in less than 10 minutes.

Fast and Accurate...Every Time

TigerFence is designed with precision linear bearings, ensuring a rigid and dead accurate position every time. TigerFence has a repeatable accuracy of +/- .003 inches (.07mm) so today's parts will be the same size as tomorrow's parts.


Two Sizes

TigerFence comes in a standard size with a working length of 51" and an overall length of 62". TigerFence Extra comes in a working length of 70" and an overall length of 82".

Features and Upgrades

- Jog Mode
- Safe zone alert when fence is close to the blade
- Calculator Mode
- Preset Function
- Metric, Decimal and Fractional Inches
- Part List Interface
- Includes standard controller that can be upgraded to a TigerTouch controller
- Upgrade to Dynamic Optimization™ software
- Upgrade to TigerLink 6 Cut List Downloading Software



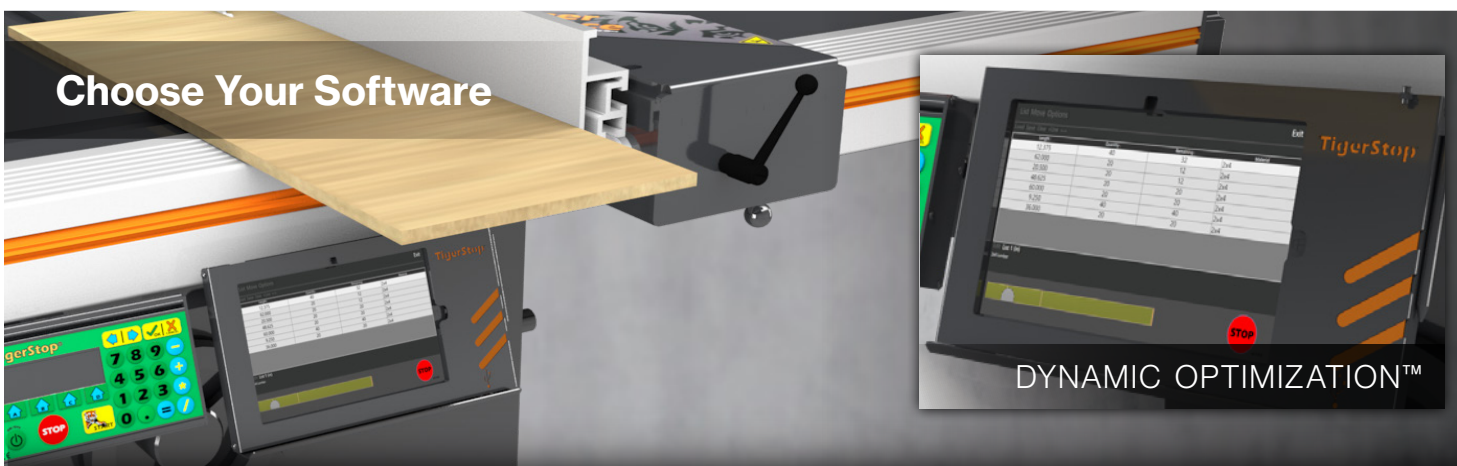

Build your very own by visiting:
www.configurator.tigerstop.com



Learn more: www.tigerstop.com

TigerStop Product

COMPARISON CHART

Product	Max Load Push	Power Requirement	Drive Type	Accuracy	Working Length
 TigerSPC	Caliper	2 AA Battery	32mm Belt Steel Reinforced	+/- .008" +/- 0.2mm	0' - 20' 0m - 6m
 SawGear	Stop Only	110 Vac	32mm Belt Steel Reinforced	+/- .008" +/- 0.2mm	8' - 20' 2.4m - 6m
 TigerCrossCut	Stop Only	110 / 240 Vac	3/4" Hi-Lead Screw	+/- .003" +/- 0.08mm	10' 3m
 TigerFence	Stop Only	110 / 240 Vac	3/4" Hi-Lead Screw	+/- .003" +/- 0.08mm	51' or 70' 1.29m - 1.77m
 TigerStop	180 LBS 81 KG	110 / 240 Vac	32mm Belt Steel Reinforced	+/- .004" +/- 0.1mm	4' - 30' 1.2m - 9.1m
 TigerRack	720 LBS 326 KG	110 / 240 Vac	Rack & Pinion	+/- .008" +/- 0.2mm	12' - 108' 3.7m - 32.9m
 TigerTurbo	840 LBS 381 KG	110 / 240 Vac	75mm Belt Steel Reinforced	+/- .008" +/- 0.2mm	12' - 42' 3.7m - 12.8m
 HeavyDuty 2	2100 LBS 952 KG	110 / 240 Vac	Rack & Pinion	+/- .008" +/- 0.2mm	12' - 108' 3.7m - 32.9m
 TigerSaw 1000	2100 LBS 952 KG	208 / 480 Vac	32mm Belt Steel Reinforced or Rack & Pinion	+/- .012" +/- 0.3mm	8' - 108' 2.4m - 32.9m
 TigerSaw 2000	2100 LBS 952 KG	208 / 480 Vac	32mm Belt Steel Reinforced or Rack & Pinion	+/- .012" +/- 0.3mm	8' - 108' 2.4m - 32.9m
 TigerSaw Miter TigerSaw MiterXL	2100 LBS 952 KG	230 Vac	32mm Belt Steel Reinforced or Rack & Pinion	+/- 0.1° +/- .012"	8' - 108' 2.4m - 32.9m
 AutoLoader	5x100 LBS 5x45.36 KG	110 / 240 Vac 208 / 480 Vac	Pneumatic	N/A	4' - 30' 1.2m - 9.1m



National Institute of Standards and Technology Certified.
• Made in USA from domestic and foreign components.

TigerStop USA
12909 NE 95th Street
Vancouver, WA 98682
P: 360.254.0661 • F: 360.260.0755

TigerStop Europe
Bedrijvenstraat 17 NL-7641 AM Wierden
Nederland
P: +31.546.57.51.71