

Code EP52UMS – 52cm Undermount Rangehood



FEATURES

- + Under mount non-visible range hood
- + Under push button control
- + 3 speed motor
- + 500m³ / hr extraction capacity
- + Stainless Steel
- + Dishwasher safe cassette filter
- + 150mm Flue diameter
- + x2 40watt halogen down lights
- + Decibel rating 44-52dBA

3 SPEED MOTOR

This range hood provides the option of 3 different speed levels ensuring you have the option to use your range hood at a low, medium or high level of operation.

EXTRACTION CAPACITY

The extraction capacity of 500m³ / hr provides strength and power to this stylish range hood.

DISHWASHER SAFE CASSETTE FILTERS

The cassette filter has 5 aluminum layers, it can be placed in a dishwasher for easy cleaning and can easily be removed and re-connected from the range hood.

DECIBEL RATING

44-52dBA

TIPS FOR BETTER USE

- Leave your range hood on for 15 minutes after the cooking of the food to remove all odors, steam etc.
- The dishwasher-safe cassette filters need to be cleaned after approximately 2 months of standard operation
- It is recommended the range hood be installed between 650mm and 750mm above the cook top
- It is also recommended that fumes from the range hood be ducted out into the atmosphere.
- Turn off the range hood before attempting to clean
- Installation must be through qualified technician.


Air Extraction



ELECTRICAL REQUIREMENT:

Range hood is supplied with 10amp cord & plug.

PRODUCT DIMENSIONS

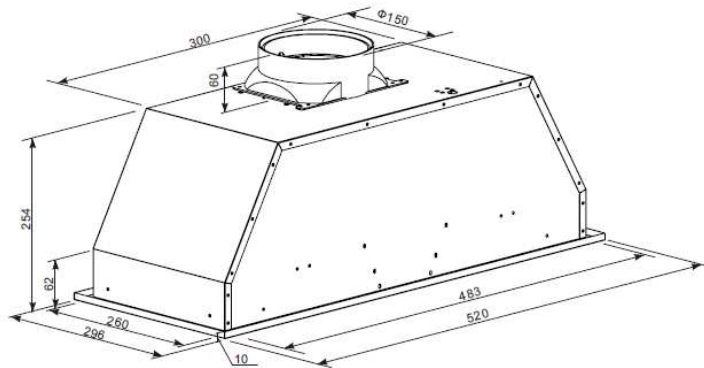

OPTIONAL ACCESSORIES

RECIRCULATING ACCESSORIES

Carbon filter Code: CF110 (requires x2)

RANGEHOOD VENTILATION KITS

- RHKE65 – Wall – Eave vent kit
- RHKMR65 – Universal metal roof kit, includes flashing
- RHKTR65 – Universal tile roof kit, includes flashing

bringing european quality to your home