



4 Point harness mounting instructions for all 2020 Wolfman Enduro (TB-2) and Blackhawk (TB-3) Tank Bags. Thank you for your Purchase



FIG1 Enduro Tank Bag



FIG2 Blackhawk Tank Bag

All the bags mentioned use the same method to attach to your motorcycle.

****Before you begin, make sure your gas tank and bag are free of dirt and grime. If you have a painted tank, we recommend you wash and wax. Also clean the frame tubes, and underside of frame behind the steering tube. ****

1-Front Harness

The front harness: 1-long 1" webbing strap, 1-short elastic keeper, 2-1" male buckles. FIG3

FIG3



2- Separate one, 1" buckle from the mounting strap and pull the webbing through the elastic keeper. Thread the long 1" mounting strap under the frame, behind the steering tube, behind any wires and hoses at the sides (see arrow), thread through the elastic keeper and the 1" male buckle.

FIG4 Side view



FIG5 Top view




3-Rear Harness FIG6

The rear harness: 2-23"x1" Mounting straps, 1-Long elastic keeper, 2-1" male buckles.

4-Separate all pieces

FIG6

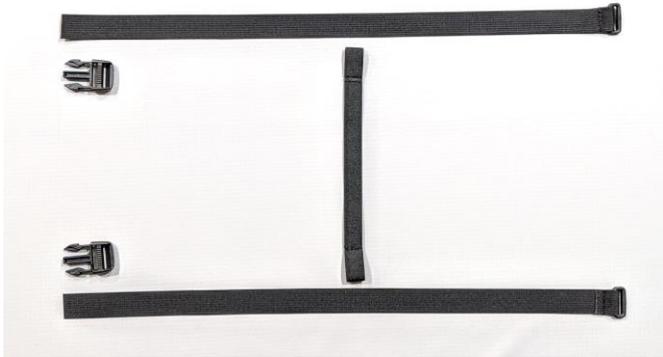

5-Thread the cut end of the rear mounting strap around each of the frame tubes, on both sides of the motorcycle. Thread as close to the lower edge of the side panel as possible.

6-Thread the cut end through the rectangle sewn at the opposite end and pull tight to secure the webbing around the frame. Repeat for opposite side. FIG7

7-Thread the cut ends of the rear mounting straps through the openings on each end of the long elastic keeper, and then, thread on the 1" male buckle. Repeat for opposite side FIG7&8

FIG7

FIG8 Top view Front and Rear Mounting Harnesses



Use the elastic keepers! (On most Enduro/dual sport bikes when removing the bag from the bike the keeper will keep the mounting straps from melting on the exhaust header pipe).

**** Hint** (For a really clean look, you can place the keeper between the seat and the gas tank, however, you may have to remove the seat to do this).

8- Place the Tank Bag or Base on the tongue of the seat just behind the gas cap. By placing the bag behind the gas cap, you will not have to remove to fill up.

9- Connect the front and rear harnesses to your Tank Bag. Tighten snug.

****Helpful hint:** If your straps are too long, they can be cut to length. Leave at least 4 to 6 inches of webbing to adjust. (If you cut too much off no worries as this is a replaceable item in our accessories. #TB-A101)

If you have any questions, please email at sales@wolfmanluggage.com.

Woof!e