


MAGPRINT CUSTOM WALLS

Product	MagPrint Wall Art and MagPrint Wall Maps
Description	<p>MagPrint Custom Walls are made using MagPrint + MagLiner for high receptive magnet use</p> <p>1. MagLiner has a grey brown surface:</p> <ul style="list-style-type: none">- high receptive ferrous liner that is used to provide magnet receptivity- easy to hang with ready-mixed wallpaper paste- grey brown surface- supplied boxed in 61 cm x 5, 6, 10 or 12m rolls <p>2. MagPrint has a white vinyl surface:</p> <ul style="list-style-type: none">- the vinyl can be digitally printed using UV or Latex inks- easy to hang with peel and stick adhesive backer (low to high grip strength)- surface that may be matt or gloss laminated- supplied printed and trimmed to make equal width strips
Receptivity Rating	MagLiner Grey Brown: 5/5 MagPrint Surface Print
Weight	MagPrint - 475 grammes per square metre MagLiner - 1800 grammes per square metre
Fire Rating	MagLiner - NA as this is used as a base liner MagPrint - EuroClass C
Roll Dimensions	MagPrint: Variable cm width MagLiner Grey Brown: 61 cm width
Adhesive	MAGFIX Adhesive or any high quality ready-mixed wallpaper paste
Warranty	7 Years
Maintenance:	- clean using a damp cloth and micro fibre cloth
Magnet Usage:	- MagPlus are high power neodymium magnets for holding items to the wall - MagLite are low power sheet magnets for decorative placement use
Health and Safety:	Warning - high power magnets can be dangerous if ingested and should not be used by young children, always read safety information provided.
Classification:	This product is classified as non-hazardous and therefore does not require any special handling. This product does not require special labelling.
Fire Fighting:	Any extinguishing media are suitable. Wear self contained breathing apparatus, protective clothing and full face mask. Fumes should be ventilated immediately due to possible liberation of noxious gases.

IMPORTANT: MagScapes wallcoverings can act as a conductor of electricity due to the ferrous content in the vinyl - do not allow it to come into contact with exposed wires, and take care when installing around electrical wiring and boxes. Turn electricity off.

MagScapes Limited

5 Albemarle Way
Clerkenwell
London
EC1V 4JB
T: +44 (0) 800 804 4936
W: www.magscapes.com

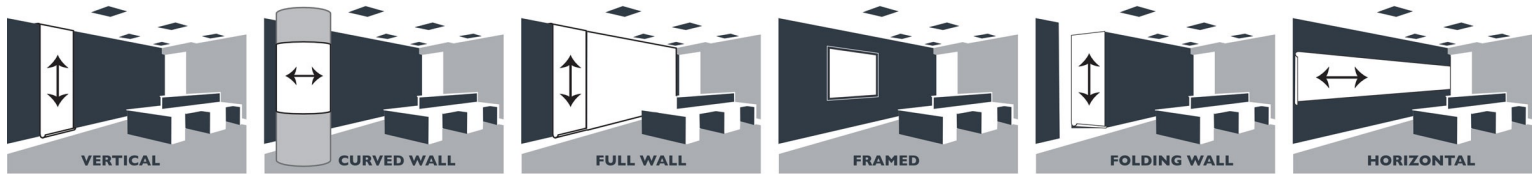

INSTALLATION GUIDE

Configuration

MagLiner and MagPrint Wallcoverings may be hung vertically or horizontally as shown above.

Tools:

- A felt or sponge roller for paste application
- Scissors and fresh blade craft knife
- Straight edge
- Soft wallpaper brush
- Microfibre cloth or sponge
- Spray bottle with water and mild detergent solution

Wall preparation:

- MagPrint Custom Wallcoverings work best when applied to mirror smooth plaster surface
- ensure the wall surface is clean, dry, sound, mirror smooth and free from paint or chemicals
- best results will be obtained if the base plaster is sealed with a PVA sealer
- where necessary fill holes with filler and use fine sandpaper to smooth

Hanging guide:

- for best outcome ensure all walls are sound, smooth and dust free.
- allow wallcoverings to adjust to room temperature.

MagLiner:

- apply a PVA seal to the wall and allow to dry.
- ensure MagLiner is hung using MagFix or any high quality ready-mixed adhesive
- pour adhesive into a pasting tray and using a roller apply paste evenly to the wall (soaking is not necessary) cover an area to allow for 1-2 drops (allow 5-7 mins for adhesive to become tacky)
- apply MagLiner to the wall in either vertical or horizontal strips
- flush out trapped air with wide brush and/or flexible blade
- butt edges together or overlay and splice for a finer seam
- trim MagLiner with a craft knife using fresh blades
- Allow to dry (min 24hrs) before applying the MagPrints

MagPrint:

- custom wallcoverings are supplied cut into required widths and lengths
- apply the cut lengths, edge to edge, vertically working from left to right
- apply MagPrint to the wall (non print side to face the wall) by peeling back a corner of the underlay and secure to the wall using a spirit level to ensure first drop is square
- pull away backer release paper and use a soft clean wallpaper brush or microfibre cloth to flush out air bubbles and creases as the print adheres to the wall
- use a light detergent mix water spray to create a damp base to enable repositioning
- use a straight edge and sharp trimming knife to trim corners and edges
- do not puncture air bubbles and do not use metal or sharp objects (other than the cutting knife) on the surface when installing the material
- the PSA adhesive will increase its bond with the wall with added pressure and over time

IMPORTANT: MagScapes wallcoverings can act as a conductor of electricity due to the ferrous content in the vinyl - do not allow it to come into contact with exposed wires, and take care when installing around electrical wiring and boxes. Turn electricity off.

MagScapes Limited

5 Albemarle Way
Clerkenwell
London
EC1V 4JB
T: +44 (0) 800 804 4936
W: www.magscapes.com

Removal:

- gently pull MagPrint wallcoverings away from wall using a scraper if needed
- MagLiner will retain its receptive quality so may be re-used if undamaged

IMPORTANT: MagScapes wallcoverings can act as a conductor of electricity due to the ferrous content in the vinyl - do not allow it to come into contact with exposed wires, and take care when installing around electrical wiring and boxes. Turn electricity off.