# PLATINUM SMART-HEAT™ ELECTRIC

Available in black and white, our Platinum Smart-Heat™
Electric heater is specifically suited for low-clearance
and design-focused spaces. This slim-line, stainless-steel unit
spreads comfort evenly in its space, all while minimizing light
emission and blending seamlessly into the background with
our recess mounting solutions.



2300W & 3400W SERIES
BLACK | WHITE

2300W & 3400W SERIES BLACK | WHITE





# **SPECIFICATIONS**


Reference the specification guide below to help you select the correct solution for your needs.

### **MODEL NUMBER** 2300W SERIES 3400W SERIES BH0320003 | BH0320007 BH0320005 | BH0320008 PRODUCT CODES PLATINUM ELECTRIC BH0320020 BH0320021 | BH0320019 | BH0320022 BH0320015 | BH0320017 BH0320016 | BH0320018 PRODUCT CODES PLATINUM ELECTRIC MARINE BH0320023 BH0320024 BH0320025 | BH0320026 **FUEL TYPE ELECTRIC** ELECTRIC COLOR BLACK I WHITE BLACK I WHITE **HEAT AREA** 65FT<sup>2</sup> 108FT<sup>2</sup> 220 - 240V/9.6A 220 - 240V/14.2A RATED CURRENT\*\* 208V/11.1A 208V/16.3A MINIMUM FLOOR CLEARANCE WALL 72" | CEILING 96" WALL 72" | CEILING 96" **MOUNTING OPTIONS CEILING MOUNT** CEILING RECESS KIT PRODUCT CODES BH3130017 BH3130027 WALL MOUNT RECESSED | FLUSH MOUNT **CEILING POLE MOUNT** CEILING POLE (2') PRODUCT CODE BH3130023 BH3130023 CEILING POLE (4') PRODUCT CODE BH3130024 BH3130024 **FREESTANDING CONTROL OPTIONS** ✓ / ON I OFF BH3130010-1 ON | OFF PRODUCT CODE BH3130010-1 DIMMER DIMMER PRODUCT CODE BH3130011-1 BH3130011-1 MASTER REMOTE \* ✓ MASTER REMOTE PRODUCT CODE BH3130012-1 BH3130012-1

# **DIMENSIONS**


With a wide range of sizes available, find the ideal heater to suit your outdoor space.

### **PROFILE**




### **CEILING RECESS**

### **CEILING RECESS FRAME 2300W**





### **CEILING RECESS FRAME 3400W**


**MINIMUM CAVITY OPTION 2** 




### MINIMUM CAVITY OPTION 1









<sup>\*</sup> Control up to six zones of heaters with unlimited heaters per zone from a single remote control. Dimmer control required. Works with dimming controllers. Remote control operates within 100ft of heaters. \*\* Available in 208V and 220-240V configurations.

Measurements displayed within this document are for reference only, for complete requirements see the installation/user manual. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in inches.

# **MOUNT OPTIONS**


With a wide array of mounting options, Bromic offers solutions to compliment any decor and provide functionality for ambiance and comfort.


### **CEILING & WALL MOUNT**

# CEILING POLE CLEARANCE FRONT DOWN MOUNT ANGLE MOUNT CLEARANCE WALL MOUNT CLEARANCE 10" (2300W) 18" (3400W) 10" (2300W) 18" (3400W)

### WALL BRACKET (INCLUDED)

### CEILING BRACKET (INCLUDED)





# **HEATING REACH**

Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution options to suit your outdoor heating needs.


### **HEAT AREAS**

### 2300W SERIES

HEATING APPROXIMATELY 65FT<sup>2</sup> 2300W HEATING POWER

### 3400W SERIES

HEATING APPROXIMATELY 108FT<sup>2</sup> 3400W HEATING POWER

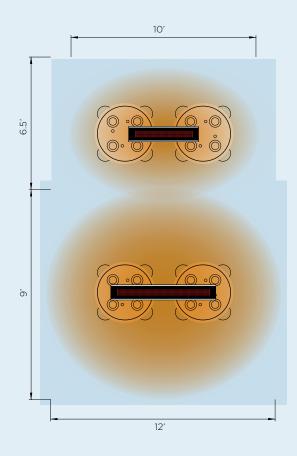

### **CONTROL OPTIONS**







ON | OFF CONTROL

DIMMER CONTROL

MASTER REMOTE



