XDimplex[®] CADET **⊕ mectre**





TABLE OF CONTENTS

Dimplex	1	DIR Outdoor/Indoor Infrared Series	33
Linear Electric Fireplaces		DSH Outdoor/Indoor Infrared Heater	34
IgniteXL® Bold	2-4	Baseboards	
IgniteXL®	5-7	Linear Convector Heaters	35
Multi-Fire® SL	8-9	Proportional Convector Heaters	36
Opti-V™	10-11	Fan-forced Heaters	
Specifications	12-13	Ceiling-mounted Heater	37
Built-in Fireboxes		Under Cabinet Heater	38
Revillusion®	14-16	Workshop Heaters	39
BF Series	17-18	Cadet	40
Specifications	19	Com-Pak Series	41
Opti-myst®	20	Com-Pak Bath Series	42
Opti-myst® Pro 1500	21	Thermostats / Controls	43
Opti-myst® Pro 1000	22	Nectre	44
Opti-myst® Pro Accessories	23	N65 Wood Stove	45
Opti-myst® Cassettes	24-25	N350 / N550 Wood-fired Ovens	46
Plug-in Fireboxes			
Multi-Fire XD®	26		
Multi-Fire XHD™	27		
Specifications	28		
Logsets			
Revillusion®	29		
Fireplace Inserts	30		
Mantels			
Fireplace Packages	31-32		

™ Dimplex®



Dimplex is the feeling you get when you hit the snooze button and stay under the covers a few minutes longer. It's the comfort found in the moments that matter, like when the kids are down and your feet go up. Our products are the gathering place and focal point that rooms are built around. So whether it's a living room or hotel lobby, bathroom retreat or spa, we can help you design the right comfort solution to create those perfect moments.

We are leaders in design and innovation, continually challenging the status quo on a global scale to create products for the discriminating buyer. Our dozens of patented technologies translate to fireplaces that dazzle the senses and heaters that make spaces more efficient and comfortable no matter what the need.

Whether a residential or commercial space, we design fireplaces that make a style statement. You will appreciate the energy efficiency and treading a little lighter with your eco-footprint, but at the end of the day it's the deep breath that comes naturally when you relax in front of a fireplace.

LINEAR ELECTRIC FIREPLACES






™ Dimplex®

LINEAR ELECTRIC FIREPLACES

IgniteXL® Bold

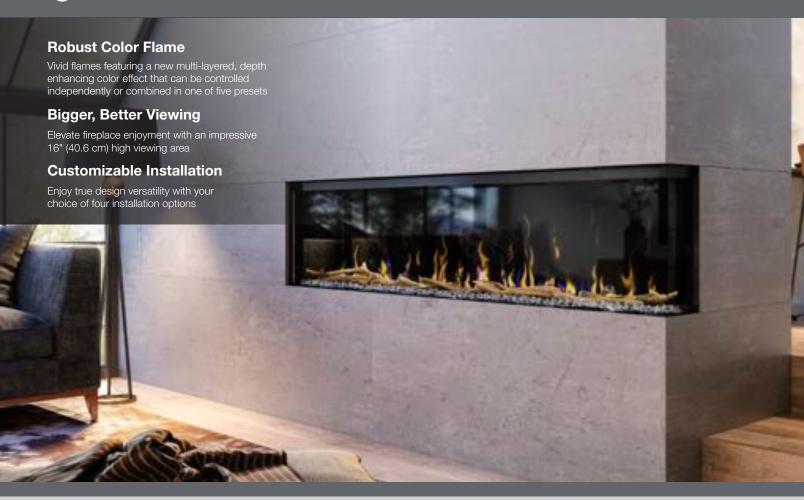



XLF5017-XD IgniteXL® Bold 50"

Product Dimensions (WxHxD) 50-1/2" x 23-7/8" x 12-1/8" 128.4 cm x 60.5 cm x 30.5 cm

Carton Dimensions (WxHxD)

Gross Weight

UPC



XLF6017-XD IgniteXL® Bold 60"

Product Dimensions (WxHxD) 63-1/8" x 23-7/8" x 12-1/8" 160.3 cm x 60.5 cm x 30.5 cm

Carton Dimensions (WxHxD)

Gross Weight

UPC



XLF7217-XD IgniteXL® Bold 74"

Product Dimensions (WxHxD) 192.2 cm x 60.5 cm x 30.5 cm

Carton Dimensions (WxHxD)


Gross Weight

UPC

™ Dimplex®

LINEAR ELECTRIC FIREPLACES

IgniteXL® Bold

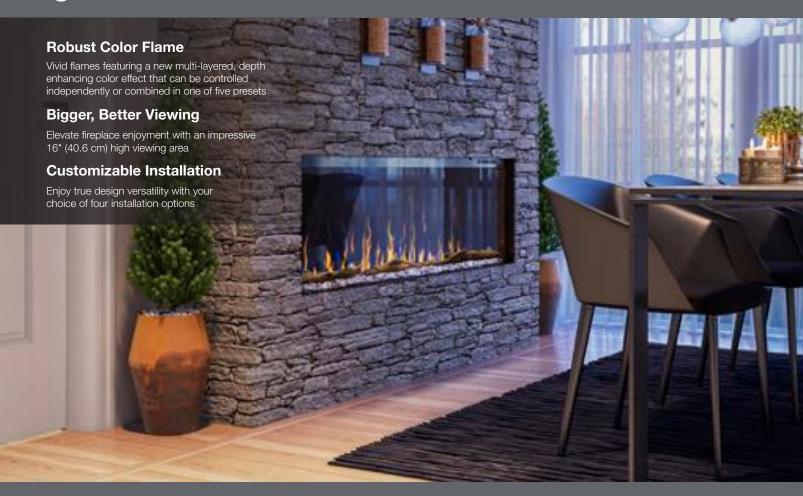



XLF8817-XD IgniteXL® Bold 88"

Product Dimensions (WxHxD) 88-1/4" x 23-7/8" x 12-1/8"

Carton Dimensions (WxHxD)

Gross Weight

781052 137264



XLF10017-XD IgniteXL® Bold 100"

Product Dimensions (WxHxD) 100-3/4" x 23-7/8" x 12-1/8"

Carton Dimensions (WxHxD)

Gross Weight

LINEAR ELECTRIC FIREPLACES


IgniteXL®



™ Dimplex®

LINEAR ELECTRIC FIREPLACES

IgniteXL®

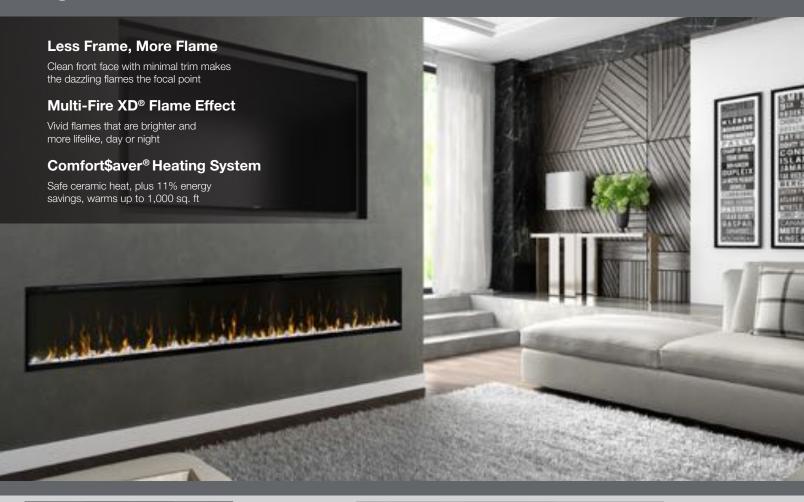



XLF50 - IgniteXL® 50"

Product Dimensions (WxHxD) 51-1/4" x 16-1/2" x 5-7/8" 130.6 cm x 41.9 cm x 14.7 cm

Carton Dimensions (WxHxD) 56-3/8" x 21-1/4" x 12 143.2 cm x 54.0 cm x 30.5 cm **Gross Weight** 73.4 lbs / 33.3 kg



XLF60 - IgniteXL® 60"

Product Dimensions (WxHxD) 60-1/4" x 16-1/2" x 5-7/8' 155.5 cm x 41.9 cm x 14.7 cm

Carton Dimensions (WxHxD) 68-3/8" x 21-1/4" x 15

Gross Weight 86.8 lbs / 39.4 kg

781052 118478



XLF74 - IgniteXL® 74"

Product Dimensions (WxHxD) 75-1/2" x 16-1/2" x 5-7/8" 191.6 cm x 41.9 cm x 14.7 cm

Carton Dimensions (WxHxD) 80-3/8" x 21-1/4" x 12

Gross Weight 121.9 lbs / 55.3 kg



XLF100 - IgniteXL® 100"

Product Dimensions (WxHxD) 101-3/8" x 16-1/2" x 5-7/8" 257.6 cm x 39.6 cm x 14.7 cm

Carton Dimensions (WxHxD) 106-3/8" x 21-1/4" x 12'

Gross Weight 170.4 lbs / 77.4 kg

UPC 781052 104594

LINEAR ELECTRIC FIREPLACES

IgniteXL®



Color Themes



Accessories (sold separately)



Driftwood & River Rock Accessory Kit

Model # XLF50 - LF50DWS-KIT XLF60 - LF74DWS-KIT XLF74 - LF74DWS-KIT XLF100 - LF100DWS-KIT

Hidden Touch Controls





Metal Trim Kit

Allows for installation into 2" x 4" wall construction

Model # XLF50 -

XLFTRIM50 XLFTRIM60 XLF74 -XLFTRIM74 XLF100 - XLFTRIM100


LINEAR ELECTRIC FIREPLACES

Multi-Fire® SL



LINEAR ELECTRIC FIREPLACES

Multi-Fire® SL

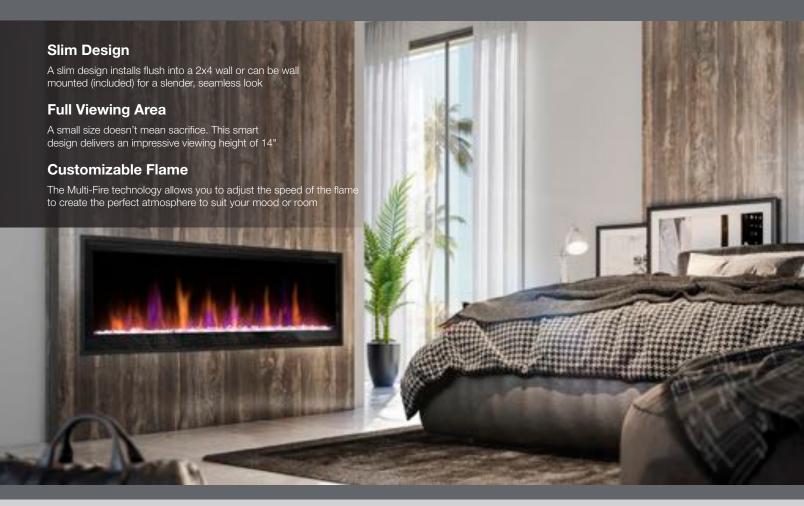



PLF3614-XS 36" Multi-Fire SL Slim Linear

Product Dimensions (WxHxD) 37-1/8" x 19-1/2" x 3-3/4"

Carton Dimensions (WxHxD)

Gross Weight



PLF4214-XS 42" Multi-Fire SL Slim Linear

Product Dimensions (WxHxD) 43-1/8" x 19-1/2" x 3-3/4"

Carton Dimensions (WxHxD)

Gross Weight



PLF5014-XS 50" Multi-Fire SL Slim Linear

Product Dimensions (WxHxD) 51-1/8" x 19-1/2" x 3-3/4"

Carton Dimensions (WxHxD)

Gross Weight



PLF6014-XS 60" Multi-Fire SL Slim Linear

Product Dimensions (WxHxD) 61-1/8" x 19-1/2" x 3-3/4'

Carton Dimensions (WxHxD)

Gross Weight

LINEAR ELECTRIC FIREPLACES


Opti-V[™]



™ Dimplex®

LINEAR ELECTRIC FIREPLACES

Opti-V[™]

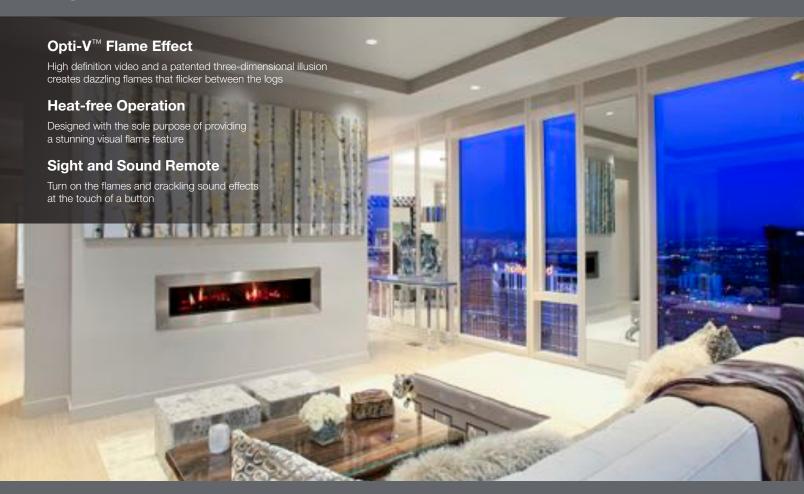



VF2927L Opti-V Solo™

Product Dimensions (WxHxD) 30" x 17-3/4" x 14" 76.0 cm x 45.0 cm x 35.5 cm

Carton Dimensions (WxHxD) 33-7/8" x 22-1/8" x 17-3/4" 86.0 cm x 56.0 cm x 45.0 cm

Gross Weight 63 lbs / 28.6 kg



VF5452L Opti-V™ Duet

Product Dimensions (WxHxD) 54-3/8" x 17-3/4" x 14" 138.0 cm x 45.0 cm x 35.5 cm

Carton Dimensions (WxHxD) 62-1/4" x 22-1/8" x 17-3/4" 158/0 cm x 56.0 cm x 45.0 cm Gross Weight 115.5 lbs / 52.4 kg

♥ Dimplex®

LINEAR ELECTRIC FIREPLACES

Specifications

Fireplace Series		lgn	iteXL® Bold S	eries			IgniteXL®	Series		
Model	XLF5017-XD	XLF6017-XD	XLF7417-XD	XLF8817-XD	XLF10017-XD	XLF50	XLF60	XLF74	XLF100	
Size	50"	60"	74"	88"	100"	50"	60"	74"	100"	
Ember Bed			Acrylic Ice & Driftwood	d			Acrylic Id	ce		
Flame Only Mode			Yes				Yes			
Heater Only Mode			Yes				Yes			
Heater Element			Ceramic				Ceramio	C		
Technology			Multi-Fire XD®				Multi-Fire	XD®		
Installation	Fully recessed, four	installation options (fro	nt-facing, right or left co	orner, bay) and ability to	connect multiple units		Partially or fully	recessed		
Volts			120/240				120/24	0		
Wattage			1500/2500				1500/25	00		
BTU's			5000/8530				5000/85	30		
Wiring		Direc	t wire - optional plug kit	available			Direct wire - includes	optional plug kit		
Heating Range			Up to 1,000 sq. ft.			Up to 1,000 sq. ft.				
Display/Controls		Built-in	display and hidden touc	ch controls		Built-in display and hidden touch controls				
Flame Operation Energy Savings		Low energ	y LED's that require zero	maintenance		Low energy LED's that require zero maintenance				
Heat Operation Energy Savings		С	omfort\$aver® heating sy	stem		Comfort\$aver® heating system				
Air Circulation Mode			Yes			No				
Timer			Yes			Yes				
Adjustable Flame Speed			Yes			No				
Brightness Control			Flame Brightness			Flame Brightness				
Flame Color	Three flame	e color settings can be	controlled independently	or combined in one of s	seven presets	Standard				
Media Accent Color		Natural, I	Blue, Green, Purple, Red	, Teal, Yellow		Natural, Blue, Green, Purple, Red				
Heat Disable			Controls & Hard Disconn	nect		Controls & Hard Disconnect				
Remote Features			Multi-function		Multi-function					
Warranty			5-year limited			5-year limited				
Accessories			XLFDLINK		XLFTRIM50, XLFTRIM60, XLFTRIM74, XL LF50DWS-KIT LF74DWS-KIT LF74DWS-KIT LF					
Viewing Height			16" (40.6 cm)		12-1/8" (30.7 cm)					
Dimensions (WxHxD)	50-1/2" x 23-7/8" x 12-1/8" 128.4 cm x 60.4 cm x 30.5 cm	63-1/2" x 23-7/8" x 12-1/8" 160.3 cm x 60.4 cm x 30.5 cm	75-5/8" x 23-7/8" x 12-1/8" 192.2 cm x 60.4 cm x 30.5 cm	50-1/2" x 23-7/8" x 12-1/8" 128.4 cm x 60. 4 cm x 30.5 cm	50-1/2" x 23-7/8" x 12-1/8" 128.4 cm x 60. 4 cm x 30.5 cm	51-1/2" x 16-1/2"	60-1/4" x 16-1/2" x 5-7/8" 155.5 cm x 41.9 cm x 14.7 cm	75-1/2" x 16-1/2" x 5-7/8" 191.6 cm x 41.9 cm x 14.7 cm	101-3/8" x 16-1/2"	

3C Dimplex[®]

LINEAR ELECTRIC FIREPLACES


Specifications

Fireplace Series	Multi-Fire® SL				Op	ti-V™	
Model	PLF3614-XS	PLF4214-XS	PLF5014-XS	PLF6014-XS	VF2927L	VF5452L	
Size	36"	42"	50"	60"	30"	54"	
Ember Bed		Acry	/lic Ice		Inner (Glow Logs	
Flame Only Mode		,	/es			Yes	
Heater Only Mode		,	/es			NA	
Heater Element		Stitch	ned wire		ı	N/A	
Technology		Multi-	Fire® SL		Opti-\	^{r™} Flame	
Installation		Partially or	fully recessed		Rec	cessed	
Volts		1	20		12	0/240	
Wattage		1	500		3.	2/64	
BTU's		5	000		1	N/A	
Wiring		Direct wire - optio	nal plug kit available		Direct wire		
Heating Range		Up to 1,	000 sq. ft.		N/A		
Display/Controls		Built-in display and	hidden touch controls		No		
Operation Energy Savings		Low energy LED's that	require zero maintenance		Low energy LED's that require zero maintenance		
Heat Operation Energy Savings		1	N/A		N/A		
Air Circulation Mode			/es			No	
Timer			/es		No		
Adjustable Flame Speed			/es	ı	N/A		
Brightness Control		Flame E	Brightness	Screen brig	htness control		
Flame Color	Three flame color set	ttings can be controlled in	dependently or combined in	Sta	ındard		
Media Accent Color		Natural, Blue,	Purple, Red, Teal		1	N/A	
Heat Disable		Controls & H	ard Disconnect		1	N/A	
Remote Features		Multi-	function	Sight and sound remote			
Warranty		2-yea	r limited		2-уеа	ır limited	
Accessories		1	N/A	OT1957-BLACK	N/A		
Viewing Height		13-7/8"	(35.1 cm)		9-1/2"	(24.1 cm)	
Dimensions (WxHxD)	37-1/8" x 19 1/2" x 3-3/4" 94.4 cm x 49.6 cm x 9.5 cm	43-1/8" x 19 1/2" x 3-3/4" 109.6 cm x 49.6 cm x 9.5 cm	51-1/8" x 19 1/2" x 3-3/4" 129.9 cm x 49.6 cm x 9.5 cm	51-1/8" x 19 1/2" x 3-3/4" 129.9 cm x 49.6 cm x 9.5 cm	30" x 17-3/4" x 14" 54-3/8" x 17-3/4" x 14" 76.0 cm x 45.0 cm x 35.5 cm 138.0 cm x 45.0 cm x 36.5 cm		

Revillusion®



Revillusion®

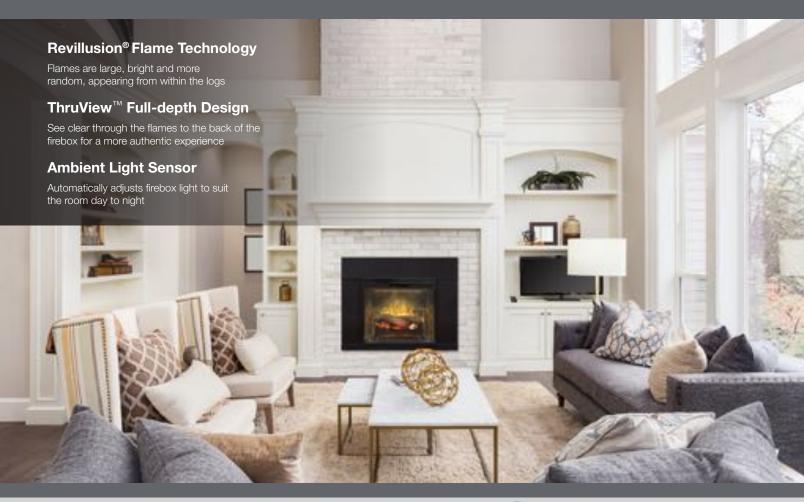



RBF24DLXWC 24" Electric Firebox

Product Dimensions (WxHxD) 25-1/4" x 22-7/8" x 12-1/8" 64.0 cm x 58.1 cm x 30.7 cm

Carton Dimensions (WxHxD) 29-3/8" x 28-1/8" x 16-3/8" 74.4 cm x 71.2 cm x 41.6 cm

Gross Weight 58.2 lbs / 26.4 kg



RBF30WC 30" Electric Firebox

Product Dimensions (WxHxD) 31-1/4" x 26-5/8" x 12-1/8"

Carton Dimensions (WxHxD) 35-1/4" x 31-5/8" x 15"

LIPC

781052 104747



Also available in Herringbone RBF24DLX - 24" Electric Firebox



RBF36WC 36" Electric Firebox

Product Dimensions (WxHxD) 37-1/4" x 26-5/8" x 12-1/8" 94.4 cm x 67.6 x 30.7 cm

Carton Dimensions (WxHxD) 41-1/4" x 31-7/8" x 15-1/4" 104.6 cm x 81.0 cm x 38.7 cm

Gross Weight 74.9 lbs / 34.0 kg

781052 104723





36" Electric Firebox - Portrait

Product Dimensions (WxHxD) 37-1/4" x 31" x 12-1/8" 94.4 cm x 78.7 x 30.7 cm

Carton Dimensions (WxHxD) 41-1/4" x 35-7/8" x 15-1/4" 104.6 cm x 91.2 cm x 38.7 cm

Gross Weight 81.1 lbs / 36.8 kg





RBF42WC 42" Electric Firebox

Product Dimensions (WxHxD) 43-1/4" x 31" x 12-1/8' 109.8 cm x 78.8 cm x 30.7 cm

Carton Dimensions (WxHxD) 47-1/2" x 35-7/8" x 15' 120.6 cm x 91.2 cm x 38.2 cm

Gross Weight 88.6 lbs / 40.2 kg

Revillusion®



Accessories



Glass Door

Fireplace		Model #
RBF30/WC	-	RBFDOOR30
RBF36/WC	-	RBFDOOR36
RBF36P/WC	-	RBFDOOR36F
RBF42/WC	-	RBFDOOR42



Glass Pane

Fireplace	Model #
RBF30/WC -	RBFGLASS30
RBF36/WC -	RBFGLASS36
RBF36P/WC -	RBFGLASS36P
RBF42/WC -	RBFGLASS42
(Included with I	RRE24DLX/WC



Birch Log Set

Fireplace		Model #
RBF24/WC	-	RBFL24BR
RBF30/WC	-	RBFL30BR
RBF36/WC	-	RBFL42BR
RBF36P/WC	-	RBFL42BR
RBF42/WC	-	RBFL42BR



Fresh Cut Log Set

Fireplace		Model #
RBF24/WC	-	RBFL24FC
RBF30/WC	-	RBFL30FC
RBF36/WC	-	RBFL42FC
RBF36P/WC	-	RBFL42FC
RBF42/WC	-	RBFL42FC



Installation Trims

RBF24/WC - 36" Installation Trim RBF30/WC - 38" Installation Trim RBF24TRIM36

RBF24/WC - 40" Installation Trim RBF30 - 44" Installation Trim

RBF30TRIM38




Plug Kit

(Included with RBF24DLX/WC)



BF Series

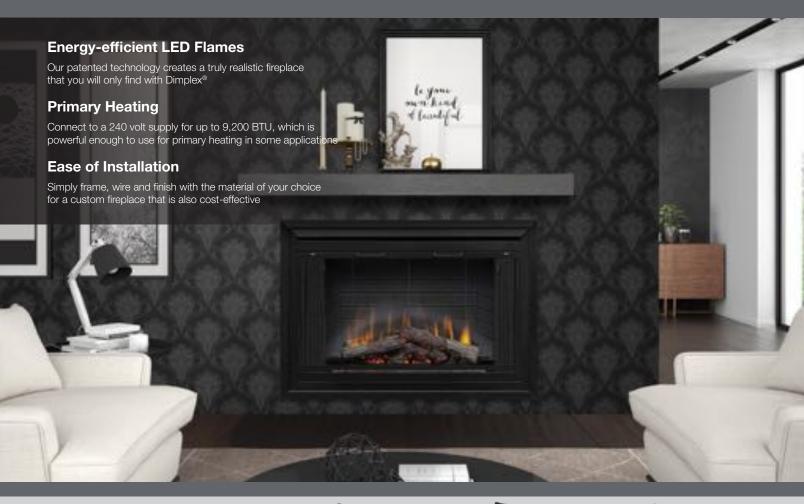



BFSL33 33" Slim Line Electric Firebox

Product Dimensions (WxHxD) 33" x 28-1/4" x 9-1/2" 83.3 cm x 71.9 cm x 24.1 cm

Carton Dimensions (WxHxD) 38-1/8" x 29-3/4" x 13-3/8" 96.8 cm x 75.4 cm x 33.8 cm

Gross Weight



BF33DXP 33" Deluxe Electric Firebox

Product Dimensions (WxHxD) 32-3/4" x 28-1/2" x 14-1/4" 83.2 cm x 73.5 cm x 36.3 cm

Carton Dimensions (WxHxD) 34-3/4" x 31-1/8" x 16-1/2'

Gross Weight



BF39STP 39" Electric Firebox

Product Dimensions (WxHxD) 38-3/4" x 32-3/4" x 15-1/4"

Carton Dimensions (WxHxD) 39" x 34-1/2" x 17-1/2" 99.1 cm x 87.6 cm x 44.5 cm

Gross Weight



BF39DXP 39" Deluxe Electric Firebox

Product Dimensions (WxHxD) 38-3/4" x 32-3/4" x 15-1/4" 98.4 cm x 83.3 cm x 38.9 cm

Carton Dimensions (WxHxD) 39" x 34-1/2" x 17-1/2" 99.1 cm x 87.6 cm x 44.5 cm

Gross Weight



BF45DXP 45" Deluxe Electric Firebox

Product Dimensions (WxHxD) 44-3/4" x 32-3/4" x 15-1/4"

Carton Dimensions (WxHxD) 45-3/4" x 35-1/2" x 17-1/2"

Gross Weight

BUILT-IN FIREBOXES

BF Series



Accessories (sold separately)



Bi-fold Look Glass Door


Model # BF33DXP - BFDOOR33BLKSM BF39DXP - BFDOOR39BLKSM BF39STP - BFDOOR39BLKSM

BF45DXP - BFDOOR45BLKSM



Glass Door

Model # BFSL33 - BFSL33DOOR BF33DXP - BFGLASS33BLK BF39DXP - BFGLASS39BLK BF39STP - BFGLASS39BLK BF45DXP - BFGLASS45BLK



Swing Glass Door

Model # BF33DXP - BFSDOOR33BLK BF39DXP - BFSDOOR39BLK BF39STP - BFSDOOR39BLK



Black Trim

Model # BF33DXP - BF4TRIM33 BF39DXP - BF4TRIM39 BF45DXP - BF4TRIM45



Plug Kit

Compatible with all BF Series fireboxes



Wall Remote

WRCPF-KIT

Compatible with all BF Series fireboxes



Remote Kit

BFRC-KIT

Compatible with BFF33DXP, BFF39DXP, BF39STP and BFF45DXP





3 Dimplex[®]


Specifications

Fireplace Series		Revil	llusion® (Prem	nium)		BF Series (Value)				
Model	RBF24DLX/ RBF24DLXWC	RBF30/ RBF30WC	RBF36/ RBF36WC	RBF36P/ RBF36PWC	RBF42/ RBF42WC	BFSL33	BF33DXP	BF39STP	BF39DXP	BF45DXP
Size	24"	30"		36"	42"	3	33"	39"		45"
Ember Bed			Realogs® Plus			Inner G	ilow Logs	Hand Finished	lı	nner Glow Logs
Flame Only Mode			Yes					Yes		
Heater Only Mode			Yes				Yes - when conn	ected to a switch or t	thermostat	
Heater Element	Ceramic		Steel	Sheathed				Steel Sheathed		
Technology			Revillusion® Flame				Original	Dimplex Flame Effect	TM L	
Installation			Built-in					Built-in		
Volts	120		120/	/208/240				120/208/240		
Wattage	1500		1375/	1975/2575		1223/1823/2423		1440/210	0/2700	
BTU's	5118		4400/	6745/8794		4173/6220/8268		5000/720	0/9212	
Wiring	Plug-in		Direct v	vire / Plug-in			Din	rect wire / Plug-in		
Heating Range			Up to 1,000 sq. ft.				Uţ	p to 1,000 sq. ft.		
Display/Controls		Сара	acitive touch built-in cor	ntrols			0	n Front - inside		
Flame Operation Energy Savings		Low energy I	LED's that require zero	maintenance		LED N/A				
Heat Operation Energy Savings	Comfort\$aver® heating system	Prima	ary-Heat - Option to use	240V supply for up to 879	94 BTU	Primary-Heat - Option to use 240V supply for up to 9212 BTU				
Timer		,	Yes			No				
Interior Surround		Full-brick surrou	and or Weathered concr	ete (WC) interior		Black	Black Authentic brick-look Black Authentic brick-look interior			tic brick-look interior
Adjustable Flame Speed			N/A			N/A				
Light Settings		Mood Lighting, Bri	ghtness and Flicker, Am	bient Light Sensor		N/A				
Color Settings		Adjust fla	ame base color from re	d to blue		N/A				
Heat Disable		Cont	rols & Hardware Discon	nnect		Hardware Disconnect Only				
Other Features	Mirage™ Flame Panel, ThruView™ Full-Depth Design	1		hruView™ Full-Depth Desig lug kit available	ın,		Option	nal plug kit available		
Remote Features			Mood-maker Remote			Three-stage remote		Optional three-stage	e remote availat	ıle
Warranty			2-year limited					2-year limited		
Optional Media		Fresh Cut	No							
Accessories	RBF24TRIM36, RBF24TRIM40	RBF30TRIM38, RBF30TRIM44, RBFPLUG, RBFGLASS30, RBFD00R30	RBFPLUG, RBFGLASS36, RBFD00R36	RBFPLUG, RBFGLASS36P, RBFDOOR36P	RBFPLUG, RBFGLASS42, RBFD00R42	BFPLUGE, BFSL33D00R	BFPLUGE, BFGLASS3BLK, BFDOOR33BLKSM, BF4TRIM33, BFRC-KIT, WRCPF-KIT, TS521W	BFPLUG BFGLASS3 BFDOOR93E BF4TRIM BFRC-K WRCPF-KIT, 1	89BLK, BLKSM, 139, KIT,	BFPLUGE, BFGLASS45BLK, BFD00R45BLKSM, BF4TRIM45, BFRC-KIT, WRCPF-KIT, TS521W
Dimensions (WxHxD)	25-1/4" x 22-7/8" x 12-1/8" 64.0 cm x 58.1 cm x 30.7 cm	31-1/4" x 26-5/8" x 12-1/8" 79.2 cm x 67.6 cm x 30.7 cm	37-1/4" x 26-5/8" x 12-1/8" 94.4 cm x 67.6 cm x 30.7 cm	37-1/4" x 31" x 12-1/8" 94.4 cm x 78.7 cm x 30.7 cm	43-1/4" x 31" x 12-1/8" 109.8 cm x 78.8 cm x 30.7 cm	33" x 28-1/4" x 9-1/2" 83.3 cm x 71.9 cm x 24.1 cm	32-3/4" x 28-1/2" x 14-1/4" 83.2 cm x 73.5 cm x 36.3 cm	38-3/4" x 32-3/4 98.4 cm x 83.3 c		44-3/4" x 32-3/4" x 15-1/4" 113.7 cm x 83.3 cm x 38.9 cm

Opti-myst®



Opti-myst® Pro 1500

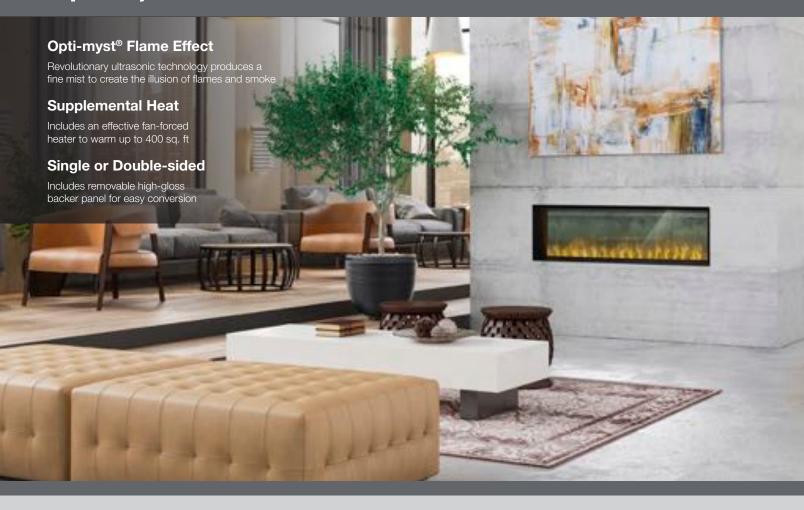

GBF1500-PRO 60" Built-In Electric Firebox Kit

Includes the following: (Ships in 4 cartons)



CDFI-BX1500 Opti-myst® Pro 1500 Firebox

Product Dimensions (WxHxD) 65" x 31-3/4" x 16-1/4" 165.0 cm x 80.5 cm x 41.2 cm

Carton Dimensions (WxHxD) 68-3/4" x 36-3/4" x 18-1/8" 174.5 cm x 93.5 cm x 46.0 cm

Gross Weight

UPC



CDFI1000-PRO Opti-myst® Pro 1000 Cassette

Product Dimensions (WxHxD) 40-1/8" x 9-1/2" x 12

Carton Dimensions (WxHxD) 44-1/2" x 13-3/8" x 18-1/8"

Gross Weight




CDFI500-PRO Opti-myst® Pro 500 Cassette

Product Dimensions (WxHxD) 20" x 9-1/2" x 12

Carton Dimensions (WxHxD) 24-3/8" x 13-7/8" x 17-3/4"

Gross Weight



FG1500 Front Glass Kit

Product Dimensions (WxHxD) 60-3/4" x 15-1/4" x 1-5/8" 154.4 cm x 38.8 cm x 4.1 cm

Carton Dimensions (WxHxD) 71-3/8" x 21-5/8" x 5-1/4"

Gross Weight





™ Dimplex®

Opti-myst® Pro 1000



GBF1000-PRO 40" Built-in Electric Firebox Kit

Includes the following: (Ships in 3 cartons)




CDFI-BX1000 Opti-myst® Pro 1000 Firebox

Product Dimensions (WxHxD) 46 -5/8" x 31-3/4" x 16-1/4" 118.4 cm x 80.5 cm x 41.2 cm

Carton Dimensions (WxHxD) 48-1/2" x 37" x 18-1/8" 123.0 cm x 94.0 cm x 46.0 cm

Gross Weight 37 lbs / 81.4 kg

UPC



CDFI1000-PRO Opti-myst® Pro 1000 Cassette

Product Dimensions (WxHxD) 40-1/8" x 9-1/2" x 12' 101.8 cm x 24.1 cm x 30.3 cm

Carton Dimensions (WxHxD) 44-1/2" x 13-3/8" x 18-1/8" 113.0 cm x 34.0 cm x 46.0 cm

Gross Weight 35 lbs / 15.87 kg

UPC





FG1000 Front Glass Kit

Product Dimensions (WxHxD) 40-5/8" x 14-1/2" x 1-5/8" 103.0 cm x 36.8 cm x 4.1 cm

Carton Dimensions (WxHxD) 128.5 cm x 53.0 cm x 13.0 cm


Gross Weight 19.6 lbs / 8.9 kg

UPC

Opti-myst® Pro Accessories



Accessories (sold separately)



Rear Glass Pane

GBF1500-GLASS

Allows for see-through installations



Log Kit

CDFILOG-KIT (Opti-myst® Pro 1000) CDFILOG-KIT3 (Opti-myst® Pro 1500)



Black Rock Media

CDFI1000-BLKRCK CDFI1500-BLKRCK



River Rock Media

CDFI1000-RVRCK CDFI1500-RVRCK



Direct Plumbing Kit

CDFIPLUMB-KIT



Driftwood Media

CDFI1000-DWSKIT CDFI1500-DWSKIT



Opti-myst® Cassettes





DFI400LH Opti-myst® Cassette - Logs

Product Dimensions (WxHxD) 16" x 13" x 8-1/2" 40.5 cm x 33.0 cm x 21.6 cm

Carton Dimensions (WxHxD) 20-1/5" x 23-1/4" x 13-3/8"

Gross Weight 23 lbs / 10.5 kg



CDFI500-PRO Opti-myst® Pro 500 Cassette

Product Dimensions (WxHxD) 20" x 9-1/2" x 12" 50.8 cm x 24.1 cm x 30.3 cm

Carton Dimensions (WxHxD) 24-3/8" x 13-7/8" x 17-3/4'

Gross Weight 24.2 lbs / 10.9 kg



CDFI1000-PRO Opti-myst® Pro 1000 Cassette

Product Dimensions (WxHxD) 40-1/8" x 9-1/2" x 12'

Carton Dimensions (WxHxD) 44-1/5" x 13-3/8" x 18-1/8"

Gross Weight 35 lbs / 15.87 kg

Opti-myst® Cassette Accessories



Accessories (sold separately)



500 Cassette Log Set



Black Rock Media

CDFI500-BLKRCK CDFI1000-BLKRCK



1000 Cassette Log Set

CDFILOG-KIT



River Rock Media

CDFI500-RVRCK CDFI1000-RVRCK



Plug Kit

CDFI-PLUGKIT



Direct-wire Heater Accessory

CDFI-TMHEAT




Driftwood Media

CDFI500-DWSKIT CDFI1000-DWSKIT

PLUG-IN FIREBOXES

Multi-Fire XD®

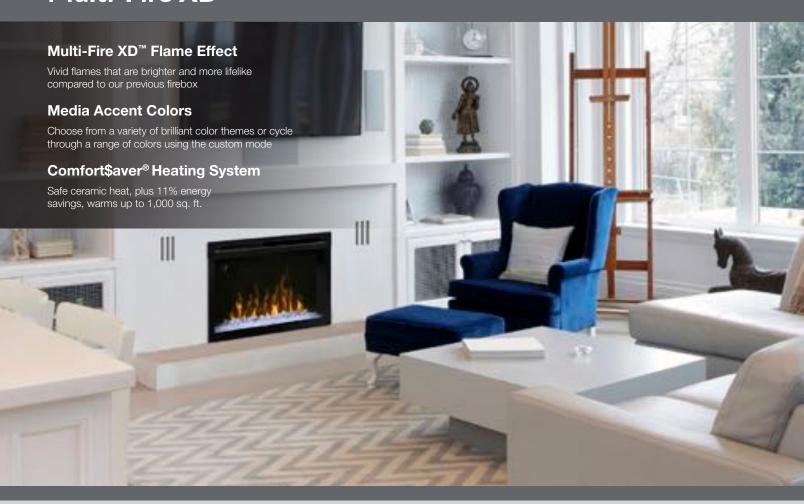



PF2325HG 25" Multi-Fire XD Electric Firebox - Acrylic Ice

Product Dimensions (WxHxD) 25-7/8" x 18-7/8" x 9-1/4" 65.7 cm x 47.9 cm x 23.6 cm

Carton Dimensions (WxHxD) 29-1/4" x 13-3/8" x 21-1/2" 74.2 cm x 34.0 cm x 54.6 cm

Gross Weight 40 lbs / 18.2 kg

UPC

781052 095014



PF2325HL 25" Multi-Fire XD **Electric Firebox - Realogs**

Product Dimensions (WxHxD) 25-7/8" x 18-7/8" x 9-1/4" 65.7 cm x 47.9 cm x 23.6 cm

Carton Dimensions (WxHxD) 29-1/4" x 13-3/8" x 21-1/2" 74.2 cm x 34.0 cm x 54.6 cm

Gross Weight 40 lbs / 18.2 kg



PF3033HG 33" Multi-Fire XD Electric Firebox - Acrylic Ice

Product Dimensions (WxHxD)

Carton Dimensions (WxHxD) 38-1/4" x 17" x 29-1/8" 97.0 cm x 43.2 cm x 74.0 cm

Gross Weight 60 lbs / 27.2 kg



PF3033HL 33" Multi-Fire XD **Electric Firebox - Realogs**

Product Dimensions (WxHxD)

Carton Dimensions (WxHxD) 38-1/4" x 17" x 29-1/8"


Gross Weight 60 lbs / 27.2 kg

UPC



PLUG-IN FIREBOXES

Multi-Fire XHD™

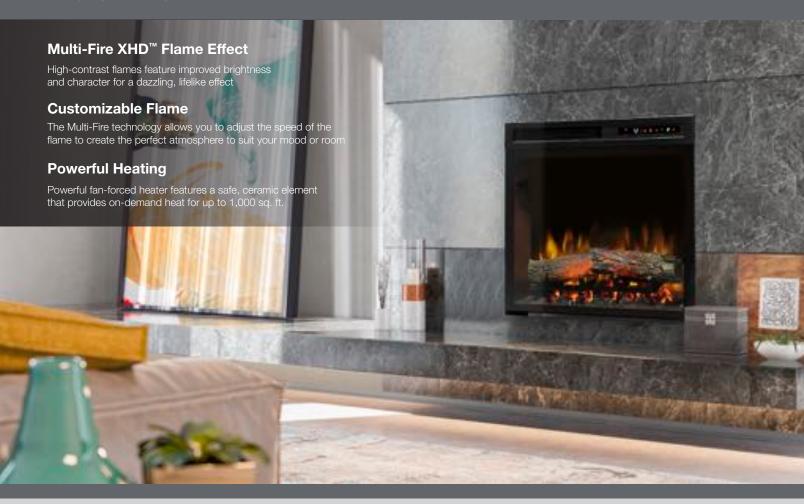



XHD23L 23" Multi-Fire XHD **Electric Firebox - Realogs**

Product Dimensions (WxHxD) 23" x 20-1/2" x 7-1/2

Carton Dimensions (WxHxD) 25-5/8" x 24" x 10-5/8'

Gross Weight



XHD26L 26" Multi-Fire XHD **Electric Firebox - Realogs**

Product Dimensions (WxHxD)

Carton Dimensions (WxHxD) 18-3/4" x 22-1/2" x 10-3/4"

Gross Weight 29.8 lbs / 13.5 kg



XHD28L 28" Multi-Fire XHD **Electric Firebox - Realogs**

Product Dimensions (WxHxD) 27-3/8" x 23-1/2" x 7-1/2"

Carton Dimensions (WxHxD) 30" x 26-7/8" x 11-1/8

Gross Weight

UPC



Also available in Acrylic Ice

23" - XHD23G 26" - XHD26G 28" - XHD28G



Optional Driftwood & River Rock Media Kit

Available for XHD26G and XHD28G fireboxes only







3 Dimplex[®]

Specifications

Fireplace Series	Multi-Fire XD®				XHD Series					
Model	PF2325HG	PF2325HL	PF3033HG	PF3033HL	XHD23L	XHD23G	XHD26L	XHD26G	XHD28L	XHD28G
Size	25"		33]"	23"		2	6"	28'	
Ember Bed	Acrylic Ice	Realogs®	Acrylic Ice	Realogs®	Realogs®	Acrylic Ice	Realogs®	Acrylic Ice	Realogs®	Acrylic Ice
Flame Only Mode		Yes					Ye	es .		
Heater Only Mode		Yes					Ye	98		
Heater Element		Ceran	nic				Cera	ımic		
Technology		Multi-Fire Flam	e Effect XD				Multi-Fire Flan	ne Effect XHD		
Installation		Fram	e				Fra	me		
Volts		120					12	20		
Wattage		150)				15	00		
BTU's		500)				50	00		
Wiring		Plug-	in				Plug	g-in		
Heating Range		Up to 1,00	O sq. ft.		Up to 1,000 sq. ft.					
Display/Controls	Floating on-scr	een display shows tempe	rature and feature setting a	at a glance	Built-in display with hidden touch controls shows temperature and feature settings at a glance					
Flame Operation Energy Savings	L	Low energy LED's that require zero maintenance								
Heat Operation Energy Savings		Comfort\$aver® he	eating system		Ceramic element					
Timer		Yes			Yes					
Adjustable Flame Speed		N/A			Yes					
Light Settings		Adjustable interi	or brightness		Adjustable interior brightness					
Color Settings	Nat	ural, Blue, Green, Purple,	Red, Prism, Kaleidoscope		Red, Blue, Natural					
Heat Disable		Heat Disable w	ith Controls		Heat Disable with Controls					
Other Features	gWave® gesture recogni	tion technology, electronic precise set temperature	thermostat keeps the roo for perfect comfort	m temperature at a	Electronic Thermostat Adjustable flame speed					
Remote Features		Multi-fur	ction				Multi-fu	unction		
Warranty		1-year limit	ed parts		2-year limited parts and service					
Optional Media	N/A				No Driftwood & River Rock					
Accessories		N/A			NA					
Dimensions (WxHxD)	25-7/8" x 18-7/ 65.7 cm x 47.9 c		32-7/8" x 23- 83.5 cm x 59.3		23" x 20-1/2" x 58.4 cm x 51.9 cm			/8" x 7-1/2" 9 cm x 18.9 cm	27-3/8" x 23-1 69.5 cm x 59.7	

♥ Dimplex®

Revillusion®





RLG20 20" Revillusion Log Set

Shown with optional ash mat REM-KIT



RLG20BR 20" Revillusion Log Set **Birch Logs**



RLG20FC 20" Revillusion Log Set Fresh Cut Logs



RLG25 25" Revillusion Log Set



RLG25BR 25" Revillusion Log Set Birch Logs



RLG25FC 25" Revillusion Log Set Fresh Cut Logs



FIREPLACE INSERTS





Trim sold separately, includes front glass

RBF24DLXWC 24" Revillusion® Fireplace Insert Weathered Concrete

Also available in Herringbone RBF24DLX

Birch or Fresh Cut log sets also available. See page 15 for details.



Trim sold separately

RBF30 30" Revillusion® Fireplace Insert Herringbone


Also available in **Weathered Concrete**

Birch or Fresh Cut log sets also available. See page 15 for details.



DFI2310 23" Electric Fireplace Insert

Accessories



Installation Trims

RBF24 - 36" Installation Trim RBF24TRIM36

40" Installation Trim RBF24TRIM40

RBF30 - 38" Installation Trim RBF30TRIM38 44" Installation Trim RBF30TRIM44



RBFGLASS30 Front Glass Pane for RBF30



DFI23TRIMX Trim Kit for **DFI2310**





Fireplace Packages





GDS33HG-1310RG **Linwood Fireplace Mantel** - Acrylic Ice

Product Dimensions (WxHxD) 65-1/2" x 50" x 10-3/4" 166.2 cm x 127.0 cm x 27.6 cm

Carton Dimensions (WxHxD) 68-1/2" x 52-1/2" x 13-7/8' 174.0 cm x 133.0 cm x 35.0 cm

Gross Weight 125.4 lbs / 57 kg

PF3033HG - 33" Multi-Fire XD Firebox



GDS33HL-1310RG Linwood Fireplace Mantel - Realogs®

Product Dimensions (WxHxD) 65-1/2" x 50" x 10-3/4" 166.2 cm x 127.0 cm x 27.6 cm

Carton Dimensions (WxHxD) 68-1/2" x 52-1/2" x 13-7/8

Gross Weight 125.4 lbs / 57 kg

Includes:

PF3033HL - 33" Multi-Fire XD Firebox



GDS33-1310RG **Linwood Fireplace Mantel** - Logs

Product Dimensions (WxHxD) 65-1/2" x 50" x 10-3/4" 166.2 cm x 127.0 cm x 27.6 cm

Carton Dimensions (WxHxD) 68-1/2" x 52-1/2" x 13-7/8" 174.0 cm x 133.0 cm x 35.0 cm

Gross Weight 125.4 lbs / 57 kg

Includes:

DF3033ST - 33" Firebox

Fireplace Packages





DM26-1152LR Featherston Fireplace Mantel

Product Dimensions (WxHxD) 61" x 44" x 15-5/8" 155.0 cm x 111.7 cm x 39.5 cm

Carton Dimensions (WxHxD) $63-7/8" \times 15-1/8" \times 24-1/8"$ 162.3 cm x 38.4 cm x 61.2 cm

Gross Weight 222 lbs / 101 kg

Compatible with XHD28L or XHD28G Firebox (sold separately)



SSE-ST-9040 Fieldstone Fireplace Mantel


Product Dimensions (WxHxD) 54-5/8" x 42-5/8" x 12-7/8" 138.8 cm x 108.3 cm x 32.7 cm

Carton Dimensions (WxHxD) 22-5/8" x 14-7/8" x 58-1/8" 57.5 cm x 37.5 cm x 147.5 cm

Gross Weight 176 lbs / 80.0 kg

Compatible with XHD28L or XHD28G Firebox (sold separately)

DIR Outdoor/Indoor Infrared Series

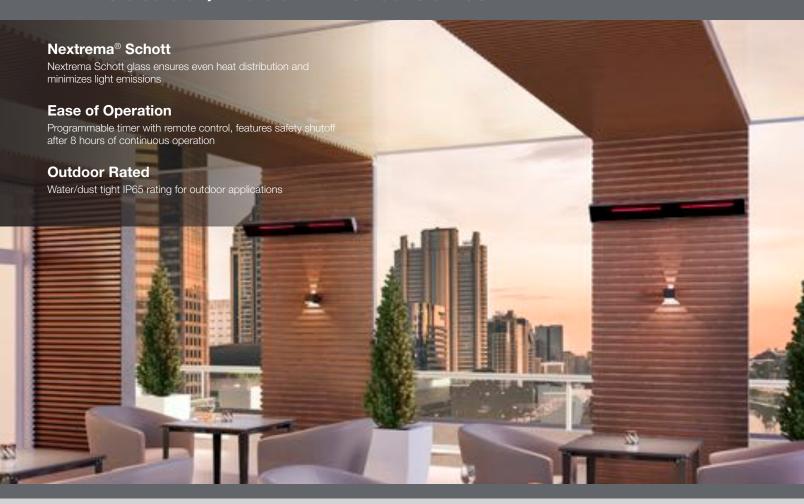



Model	Watts	VOITS		Weight (lbs./kg)
DIR15A10GR	1500 120		35-1/2 / 90.1	13.4 / 6.1
DIR18A10GR	1800	240	35-1/2 / 90.1	13.4 / 6.1
DIR22A10GR	2200	240	35-1/2 / 90.1	13.4 / 6.1

Height x Depth 17.1 cm x 7.6 cm




Model	Watts	Volts	Length (in/cm)	Weight (lbs./kg)	
DIR30A10GR	3000	240	50-5/8 / 128.6	18.4 / 8.4	

Height x Depth




DSH Outdoor/Indoor Infrared Heater

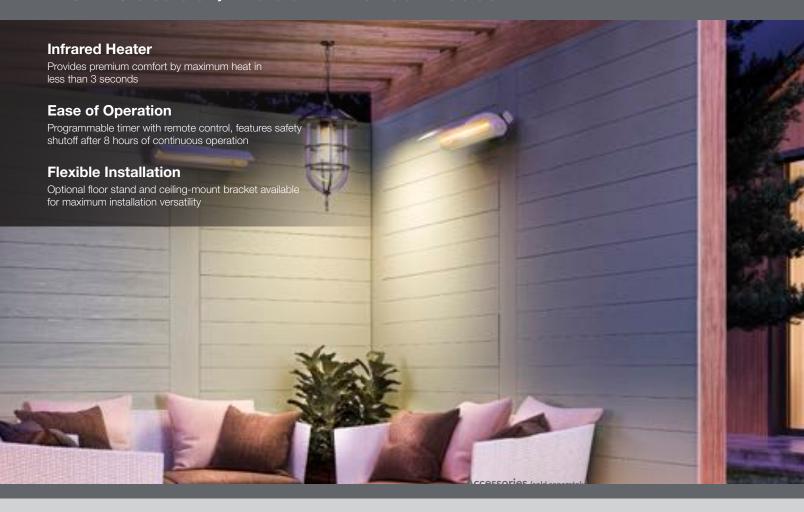





Linear Convector Heaters

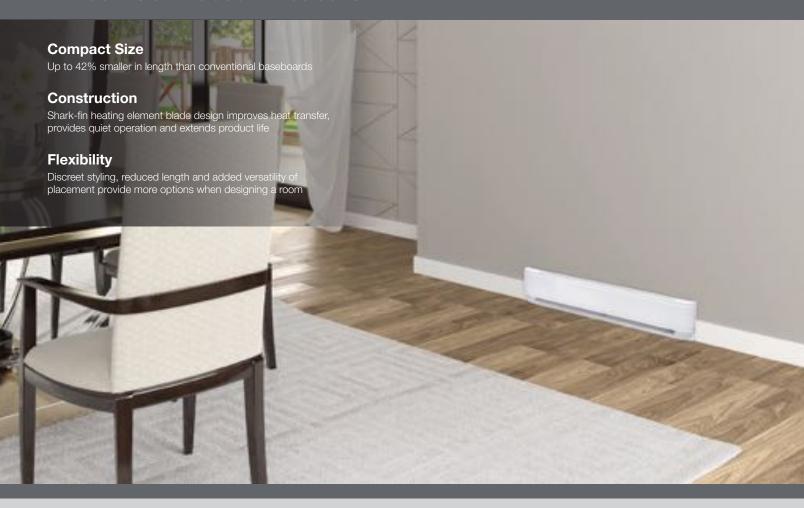



Mode	l Wa	tts Volts	BTU	Length (in/cm)	Weight (lbs./kg)
LC2005V	V31 500 /	375 240 / 208	8 1706 / 128	0 20 / 50.8	3.75 / 1.7
LC2507V	V31 750 /	563 240 / 208	8 2559 / 191	9 25 / 63.5	4.4 / 2.0
LC3010V	V31 1000 /	750 240 / 208	8 3412 / 255	9 30 / 76.2	5 / 2.3
LC3512V	V31 1250 /	/ 938 240 / 208	8 4265 / 319	9 35 / 88.9	6.65 / 3
LC4015V	V31 1500 /	1125 240 / 208	8 5118 / 383	9 40 / 101.6	7.5 / 3.2
LC5020V	V31 2000 /	1500 240 / 208	8 6824 / 512	0 50 / 127.0	8.2 / 3.7
LC6025V	V31 2500 /	1875 240 / 20	8 8530 / 639	8 60 / 152.4	9.7 / 4.4


Height x Depth 16.9 cm x 5.9 cm Accessories (sold separately)



Built-in Thermostat Kit

DTK-SP (Single Pole) DTK-DP (Double Pole)

Proportional Convector Heaters

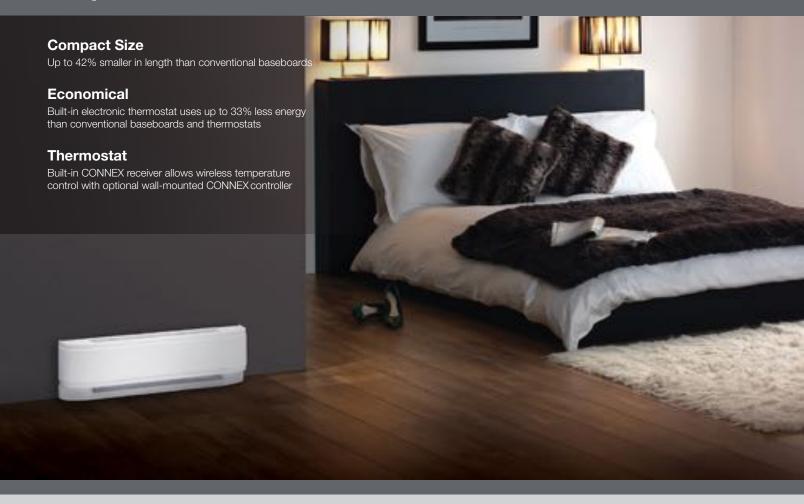



Model	Watts	Volts	BTU	(in/cm)	(lbs./kg)
PC2005W31	500 / 375	240 / 208	1706 / 1280	20 / 50.8	4 / 1.8
PC2507W31	750 / 563	240 / 208	2559 / 1919	25 / 63.5	4.65 / 2.1
PC3010W31	1000 / 750	240 / 208	3412 / 2559	30 / 76.2	5.25 / 2.4
PC3512W31	1250 / 938	240 / 208	4265 / 3199	35 / 88.9	6.65 / 3
PC4015W31	1500 / 1125	240 / 208	5118 / 3839	40 / 101.6	7.75 / 3.5
PC5020W31	2000 / 1500	240 / 208	6824 / 5120	50 / 127.0	8.45 / 3.8
PC6025W31	2500 / 1875	240 / 208	8530 / 6398	60 / 152.4	9.95 / 4.5

Height x Depth 6-5/8" x 2-3/8" 16.9 cm x 5.9 cm



CX-MPC



CX-WIFI



For more information see page 43

DPCRWS

FAN-FORCED HEATERS

Ceiling-mounted Heater





Model	Watts	Volts	CFM	Weight (lbs./kg)
RCH5031CXW	5000	240	150	11 / 5.1







CX-MPC

CX-WIFI

DPCRWS

Wireless Control Options


Model	Description
DPCRWS	Single-zone CONNEX Controller
CX-MPC	Multi-zone Programmable CONNEX Controller
CX-WIFI	Wi-Fi Multi-zone Programmable CONNEX Controller

For more information see page 43



40.6 cm x 13.3 cm x 40.6 cm

Under Cabinet Heater

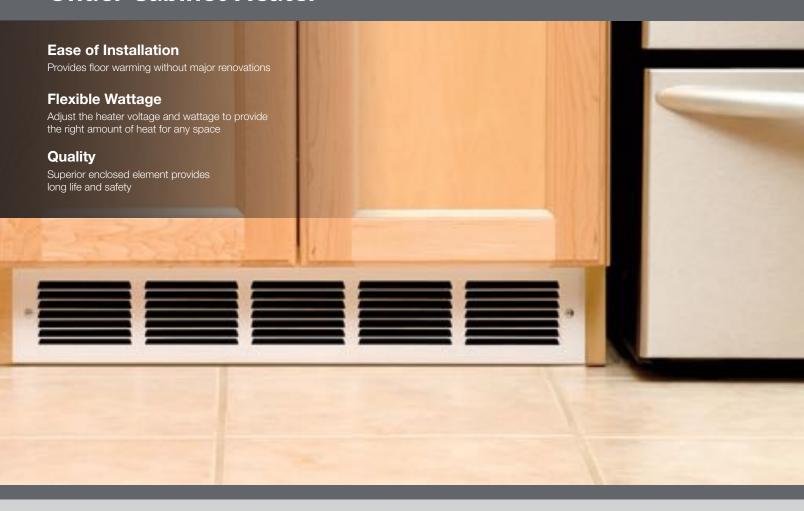



Model	Watts	Volts	BTU	Weight (lbs./kg)	
	450	120	1535		
	900	120	3071	05/42	
RKHA20D31MC	1350	120	4606		
KKHAZUDSIMC	1800	120	6142	9.5 / 4.3	
	900 / 675	240 / 208	3071 / 2303		
	1800 / 1350	240 / 208	6142 / 4606		

Product Dimensions (WxHxD) 23-3/8" x 3-3/8" x 9-1/2" 59.4 cm x 8.6 cm x 24.1 cm



Customize with your choice of three included grille colors.

Accessories (sold separately)

Double Pole Thermostat Kit CKHATD23



FAN-FORCED HEATERS

Workshop Heaters

CUH - Powerful heat output up to 5000W (240V) - Adjustable louvers direct warm air where needed - Built-in single-pole thermostat for accurate temperature control - Thermal overheat protection stops heater from running if it gets too hot **DGWH & DCH** - 300 CFM delivers powerful heat output - Thermal overheat protection stops heater from running if it gets too hot - Includes 6 foot cord with NEMA standard plug (6-30P) - Stainless steel tubular element

DCH4831LG Portable Construction Heater

Product Dimensions (WxHxD) 9" x 12-1/2" x 7-1/2 22.9 cm x 31.5 cm x 19.1 cm

BTU CFM 300

10.9 lbs / 4.95 kg

DGWH4031G Garage/Workshop Heater

Product Dimensions (WxHxD) 9" x 11" x 7-1/2

4000 240 BTU CFM

Weight 10 lbs / 4.5 kg

CUH05B31TG **Compact Unit Heater**

Product Dimensions (WxHxD) 9" x 11" x 9

240 / 208

Weight 10 lbs / 4.5 kg

CADET



Cadet delivers sensible design and efficiency to help you create a comfortable and inviting home environment at a value all can appreciate. We are known for our trusted products that are made in America and built to last.


Cadet offers both primary heating sources and complementary products that support a central heating system, letting you easily add warmth and temperature control to any space. Our heaters are perfect for warming those stubborn chilly rooms, like the finished basement, garage, winter cabin or sunroom.

Whether your next project is a replacement heater, remodel, new addition or newly built home, Cadet heating solutions are perfect for keeping you and your family warm, safe and comfortable.



FAN-FORCED WALL HEATERS

Com-Pak Series

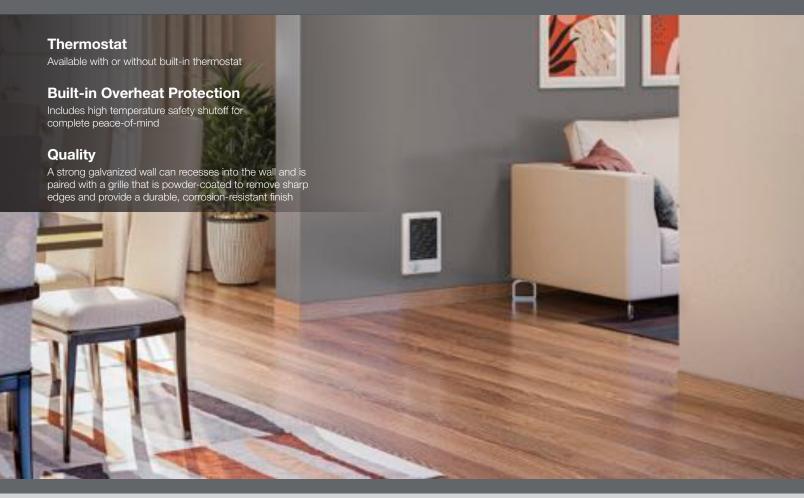



Model	Watts	Volts	BTU	Weight (lbs./kg)
CSC101W*	1000	120	3415	7 / 3.17
CSC102W*	1000 / 750	240 / 208	3415 / 2560	7 / 3.17
CSC102TW	1000 / 750	240 / 208	3415 / 2560	7 / 3.17
CSC151W*	1500	120	5120	7 / 3.17
CSC152W*	1500 / 1125	240 / 208	5120 / 3840	7 / 3.17
CSC152TW	1500 / 1125	240 / 208	5120 / 3840	7 / 3.17
CSC202W*	2000 / 1500	240 / 208	6825 / 5120	7 / 3.17
CSC202TW	2000 / 1500	240 / 208	6825 / 5120	7 / 3.17

Accessories




Product Dimensions (WxHxD)

Model	Description			
C1TKW	2" x 3" wall construction trim kit			
C4TKW	Surface trim kit			
CTT1W	Single pole built-in thermostat kit			
CTT2W	Double pole built-in thermostat kit			

FAN-FORCED WALL HEATERS

Com-Pak Bath Series

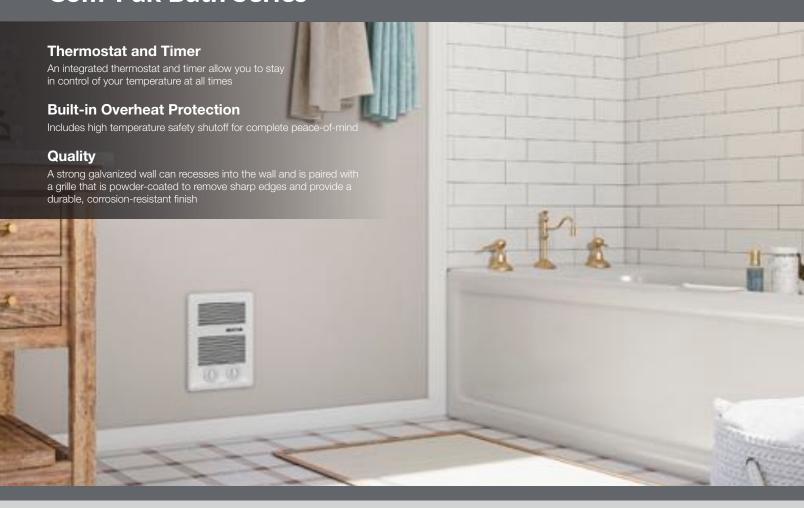



Product Dimensions (WxHxD) 22.9 cm x 30.5 cm x 1.6 cm

		ecs=
8 8 8		
	A	All units come complete

Model	Watts	Volts	BTU	(lbs./kg)
CBC103TW	1000	120 / 240	3415	8 / 3.6
CBC132TW	500 / 800 1300 / 375 600 / 975	240 / 208	1710 / 2730 4440 / 1280 2050 / 3300	8 / 3.6

with wall can and grille.

Controls







Cadet Non-Programmable **Double Pole Electronic Thermostat**

Volts

TEN362DW Cadet Non-Programmable **Double Pole Electronic Thermostat**

Volts



TEP302DW **Cadet Programmable Double Pole Electronic Thermostat**

Volts

TEP362DW **Cadet Programmable Double Pole Electronic Thermostat**

Volts



TS321W **Dimplex** Single Pole Thermostat

Watts Volts 5000 max 277 max

TD322W Dimplex **Double Pole Thermostat**

Volts 5000 max 277 max

Controllers:



CX-MPC CONNEX® Multi-zone **Programmable Controller**





CX-WIFI CONNEX® Multi-zone Wi-Fi **Programmable Controller**



DPCRWS CONNEX® Single-zone Controller

hectre.



Proudly Australian, Nectre wood-fired ovens are designed and manufactured with more than 40 years of knowledge and expertise in the wood heating business. We take pride in the quality and integrity of our products and continue to find new production techniques to produce the best technology and design.

At Nectre, we develop the next generation of efficient, low emission wood heaters. We keep steadily improving our stove designs as well as production techniques with steel - now laser cut and manufactured with state-of-the-art robotic welding technology. The result is products that are built to perform at the highest standards, yet ultimately meet the most important criteria: providing people with warmth and home comfort.



N65 Wood Stove





N65 **Wood Stove**

Product Dimensions (WxHxD) 22-7/8" x 40-7/8" x 19-1/4" 58.1 cm x 103.7 cm x 48.5 cm

Weight 419 lbs / 190 kg



67% EFFICIENCY



12.5" (432mm) MAX LOG



1.98g



2,150 sq. ft. (up to 180m²)



68,500 BTU (19.8kW) PEAK OUTPUT



1/4" (6mm) CONSTRUCTION



10hr **BURN TIME**



1.67 cu. ft. (.047m³) FIREBOX SIZE



N350 / N550 Wood-fired Oven





N350 Wood-fire Oven

Product Dimensions (WxHxD) 21-5/8" x 34" x 21' 54.9 cm x 86.4 cm x 53.3 cm

BTU

Weight 265 lbs / 120.2 kg



N550 Wood-fire Oven

Product Dimensions (WxHxD) 26-5/8" x 33" x 19-5/8 67.6 cm x 83.8 cm x 49.7 cm

BTU 65,000

Weight 465 lbs / 210.9 kg



Enhancing the moments that matter in life



www.dimplex.com











www.cadetheat.com









www.nectreusa.com



