MONTEBELLO™ ST-B

SEE-THROUGH **DIRECT-VENT FIREPLACE**

INTERIOR

Wall Stud

Heade

*Insulation is NOT ALLOWED in clearance zones around vent components. Keep this area free from combustible matoriale

materials.

Combustible materials are allowed on face of appliance

above this point

NOTE: For indoor/outdoor in-

stallations, the control side of

the fireplace must be installed

on the indoor side.

Nall Finishing

Combustible **Finished Wall** Materials

Min. 4" * (102 mm)

+ Min. 1" (25 mm)

2 ft Vertical Vent and 90° Elbow

-Top of Appliance

Spacers

FIREPLACE

(side view)

 \odot

0

¢

Top of Door Frame

(


Ľ


 \square

0

	A	B ①	C ②	D	E ④
in	52-1/8	47-3/8	75-1/2	26-3/8	6
(mm)	(1324)	(1203)	(1918)	(668)	(152)

Framing Should be constructions of 2 x 4 or larger lumber.






2 ft vertical vent and one 90° elbow. For other venting configurations, see Installation and **Operation Manual**

Dimension **B** is from <u>fireplace base</u> to top fram-1 ing member.


2 Dimension C is from fireplace base to centerline of horizontal vent pipe. Minimum vent framing:

3 1/2" board for platform (shown in gray). Dimension E is a 6" clearance from fireplace base 4 to outdoor surface (e.g., deck, patio, lanai) that is required as a moisture barrier (not a combustible clearance) on outdoor side only.

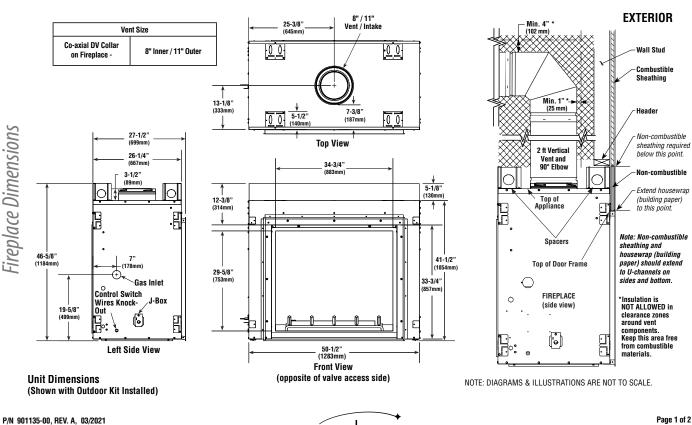

FIREPLACES

MONTEBELLO™ ST-B

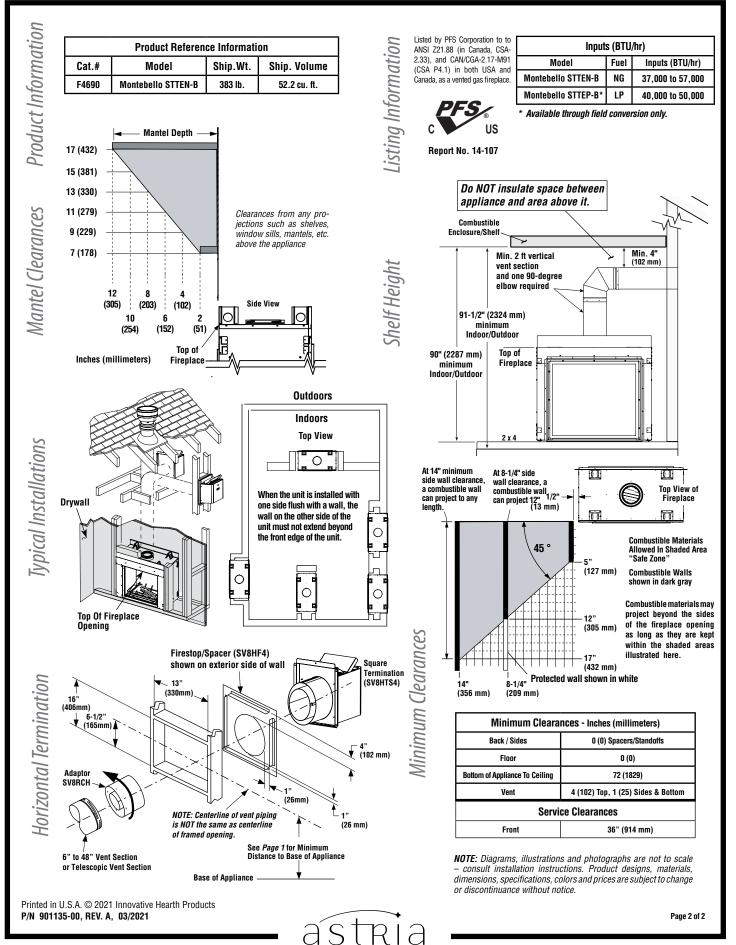

FIREPLACES