



SOLACE

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE

Unit Illustrated: Solace HBZDV4736N Direct Vent Fireplace, LOGF36 Fiber Split Oak Log Set, VLBIT4 Log Bits, HB47CVCK Designer Clean View Circulating Kit, HB47RRH Red Herringbone Brick Liner.

 marquis
COLLECTION

SOLACE SPECIFICATIONS


SOLACE

Model	MQHBZDV3636N/NE MQHBZDV4236N/NE	MQHBZDV3636LP/LPE MQHBZDV4236LP/LPE	HBZDV4736N HBZDV4736NE	HBZDV4736LP HBZDV4736LPE
Flue	Top	Top	Top	Top
Fuel	Natural Gas	Propane	Natural Gas	Propane
Input Max.	30,500 BTU	29,000 BTU	40,000 BTU	36,000 BTU
Input Min.	29,000 BTU	22,200 BTU	27,000 BTU	30,000 BTU
FE (P.4.1-15)	61.98% / 63.92%	67.63% / 69.25%	60.39% / 61.88%	53.79% / 54.90%
Log Set	LOGF36	LOGF36	LOGF36	LOGF36

SOLACE II

Model	HBZDV3624N/NE	HBZDV3624LP/LPE	HBZDV4224N/NE	HBZDV4224LP/LPE
Flue	Top	Top	Top	Top
Fuel	Natural Gas	Propane	Natural Gas	Propane
Input Max.	24,000 BTU	22,000 BTU	24,000 BTU	22,000 BTU
Input Min.	14,000 BTU	15,000 BTU	14,000 BTU	15,000 BTU
FE (P.4.1-15)	50.48% / 52.30%	52.59% / 54.24%	55.69% / 57.81%	57.03% / 59.09%
Log Sets	MQLOGC45 LOGC44	MQLOGC45 LOGC44	MQLOGC45 LOGC44	MQLOGC45 LOGC44

TOP FLUE MODEL	Height		Front Width		Depth	
	Actual	Framing	Actual	Framing	Actual	Framing
LOUVERS						
HBZDV36	34 13/16"	35"	36"	36 3/8"	16 7/16"	17"
HBZDV42	37"	37 3/8"	41 7/8"	42 3/8"	16 7/16"	17"
HBZDV47	43 1/16"	43 1/8"	47 1/16"	47 3/8"	19 7/16"	19 1/2"
CLEAN VIEW CIRCULATING KIT						
HBZDV36	34 1/16"	41"	38 1/16"	38 7/16"	18 7/8"	19 1/2"
HBZDV42	36 13/16"	43"	42 1/16"	42 7/16"	18 15/16"	19 1/2"
HBZDV47	49"	49 1/8"	48 1/16"	48 3/8"	21 15/16"	22"

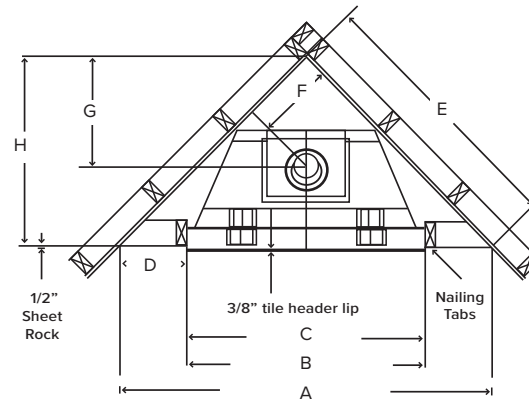

TOP FLUE MODEL VIEWING AREA

	Width	Height
HBZDV36	29 3/4"	18 5/8"
HBZDV42	33 3/8"	20 3/8"
HBZDV47	39 1/2"	26 3/8"

CORNER FRAMING DIMENSIONS (INCHES): LOUVERED UNITS

HBZDV36	HBZDV42	HBZDV47
A 54 13/16"	A 58 13/16"	A 65 1/4"
B 36 3/8"	B 42 3/8"	B 47 3/8"
C 36"	C 41 7/8"	C 47 1/16"
D 9 3/16"	D 8 1/4"	D 8 15/16"
E 38 3/4"	E 41 5/8"	E 46 1/8"
F 12 3/8"	F 13 3/4"	F 13 15/16"
G 17 9/16"	G 19 1/2"	G 19 11/16"
H 27 3/8"	H 29 7/16"	H 32 5/8"

CORNER FRAMING DIMENSIONS (INCHES): CLEAN VIEW CIRCULATING KIT (CVK)

HBZDV36	HBZDV42	HBZDV47
A 59 7/8"	A 63 13/16"	A 70 3/16"
B 38 7/16"	B 42 7/16"	B 48 3/8"
C 38 1/8"	C 42 1/16"	C 48 1/16"
D 10 11/16"	D 10 11/16"	D 10 7/8"
E 42 5/16"	E 45 1/8"	E 49 5/8"
F 12 3/8"	F 13 3/4"	F 13 15/16"
G 17 9/16"	G 19 1/2"	G 19 11/16"
H 29 5/16"	H 31 7/8"	H 35 1/16"



Unit Illustrated: Solace II HBZDV4224N Direct Vent Fireplace, MQLOGC45 Oak Log Set, HB42GBL Grill Kit (Black), HB42RLT Traditional Brick Liner.



Unit Illustrated: Solace II HBZDV3624N Direct Vent Fireplace MQLOGC45 Oak Log Set, HB36CVCK Designer Clean View Circulating Kit, HB36RLH Herringbone Brick Liner.



Find all detailed Solace manuals:



FIND YOUR SOLACE

Imagine lively gatherings or times of quiet reflection in front of the beautiful **Solace**. Available in two sizes, the **Solace** allows you to transform your fireplace into something truly unique.

With so much style and attention to detail, the **Solace** is available in a range of sizes and styles. You can choose from our mid-efficient rated fireplace for ambiance and taking the chill out of the room, or our higher-efficient version for additional warmth.

STANDARD FEATURES

- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Dual burner with Realistic Flame Pattern
- Safety Screen Barrier

OPTIONAL FEATURES

Designer Clean View Circulating Kit:

No Louvers Required

Louvers:

Grills available in Black

Fan Kit:

Heat activated with variable speed control

Accessories:

Log sets or rock sets required

Liners:

Porcelain Reflective Liner or Brick Liners

Thermostat:

Wall Mount or Programmable

Remote:

Thermostat On/Off, Thermostat On/Off modulating, Thermostat On/Off modulating and fan control



SOLACE ACCESSORIES

LOG SETS



LOGF36 Fibre Split Oak (SOLACE)



MQLOGC45 Burnt Oak (SOLACE II)



LOGC44 (SOLACE II)

ROCK SETS

REQUIRES SUPPORT PLATFORM (SOLACE I ONLY)



MQROCK2 Natural Rock Set



MQROCK2 Multi-Colored Rock Set

LINER



PL Porcelain Reflective

BRICK LINERS



RLH Herringbone Brick



RRH Red Herringbone Brick



RLT Traditional Brick

See the latest evolution in fireplaces at marquisfireplaces.net

Unit Illustrated: Solace
MQHBZDV4236N Direct Vent
Fireplace, LOGF36 Fiber Split
Oak Log Set, HB42GBL Black
Grills, HB42RLT Traditional
Brick Liner.



Marquis Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certified to: ANSI Z21.88-2017 • CSA 2.33-2017
Vented Gas Fireplace Heaters, CSA 2.17-2017

Note: Components may have to be ordered separately to create a complete unit. Discuss with your local Marquis Dealer for clarification.

Canada

ENERGUIDE

Look for the **ENERGUIDE**
Gas Fireplace Energy
Efficiency Rating in this brochure

Based on CSA P.4.1-15



FOR CALIFORNIA RESIDENTS ONLY:
WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is [are] known to the State of California to cause birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov.

Crafted entirely in Canada, each Marquis fireplace is built to the highest standards and made to last.

LIMITED LIFETIME WARRANTY



2340 Logan Avenue
Winnipeg, Manitoba, CAN
R2R 2V3
Phone: 204.632.1962
Fax: 204.632.1960
marquisfireplaces.net

Printed in Canada
8057 - 08/2023