Dimplex[®]

Electric Infrared Heater Indoor/Outdoor Infrared Heater

DIR Series





The precision-engineered Ceramic Glass Infrared Heater provides premium performance that heats as beautifully as it looks. Schott Nextrema® ceramic tinted glass combines high-temperature, thermal shock and chemical resistance, excellent infrared transmission, non-porous surface and attractive design. And with full heating power available in under 8 seconds, you can go from cold to comfortable with a quick touch of the remote control.

Electric Infrared Heater Indoor/Outdoor Infrared Heater

Surface Installation



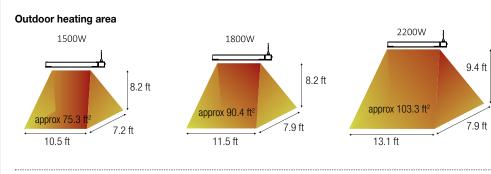

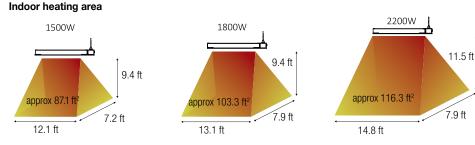

DIR Series

Features

Schott Nextrema® Glass

Schott Nextrema® glass combines high-temperature, thermal shock and chemical resistance, excellent infrared transmission, non-porous surface and attractive design

Instant Heat

Ruby halogen bulb provides full power in under 8 seconds

Waterproof IP65 rated for outdoor or indoor use

Corrosion Resistant Anodized aluminum casing provides long life

Durable Up to 5,000 hours of running life

Installation Options Includes pivoting mounting bracket

Hardware Connection Designed for permanent installations on a dedicated circuit

Adjustable Angle



Remote control included

Automatic Shutoff

Unit has safety mechanism that automatically shuts off power to the unit after 8 hours of operation

Ease of Installation

Each heater comes with the element pre-installed, which eases in installation and reduces the risk of damaged, broken or misplaced elements upon delivery

Model #	Description	Mounting Watts Volts			Warrantyt	Product Dimensions (WxHxD)	
						Inches	cm
DIR22A10GR	Infrared Ceramic Glass Heater	Wall, Surface Only	2200	240	1 yr.	35-1/2 x 6-3/4 x 3	90.2 x 17.0 x 7.6
DIR18A10GR	Infrared Ceramic Glass Heater	Wall, Ceiling, Surface Only	1800	240	1 yr		
DIR15A10GR	Infrared Ceramic Glass Heater	Wall, Ceiling, Surface Only	1500	120	1 yr		

Specifications, finishes and dimensions are subject to change. †Limited warranty. ©2019 Glen Dimplex Americas