


# CAX36-1 DIRECT VENT GAS FIREPLACE




## Specifications

Model	BTU	Width		Height		Depth		Glass Size
		Actual	Framing	Actual	Framing	Actual	Framing	
CAX36NTE-1	35,500	35 1/2	35 3/4	42 7/16	43 5/8	18 3/4	19	25 11/16 x 30 3/8
CAX36PTE-1	34,000							


## Dimensions

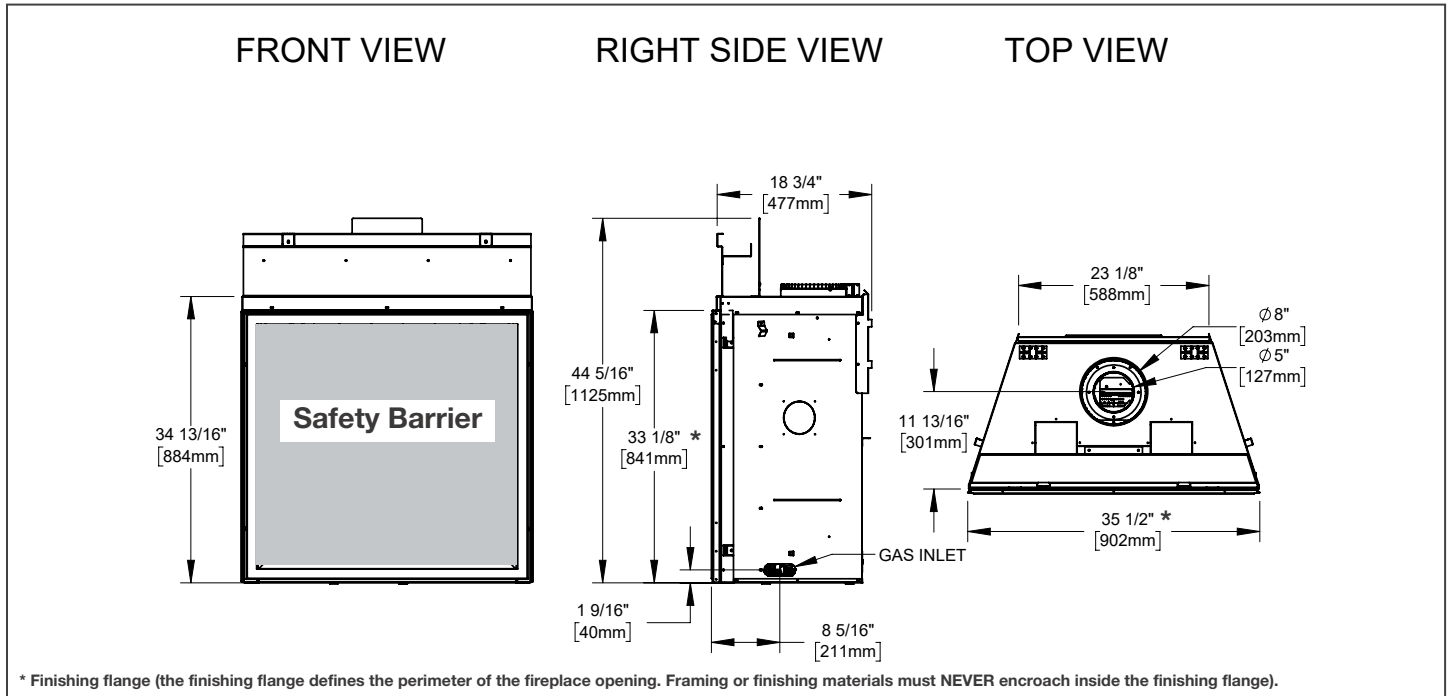

## Appliance Location

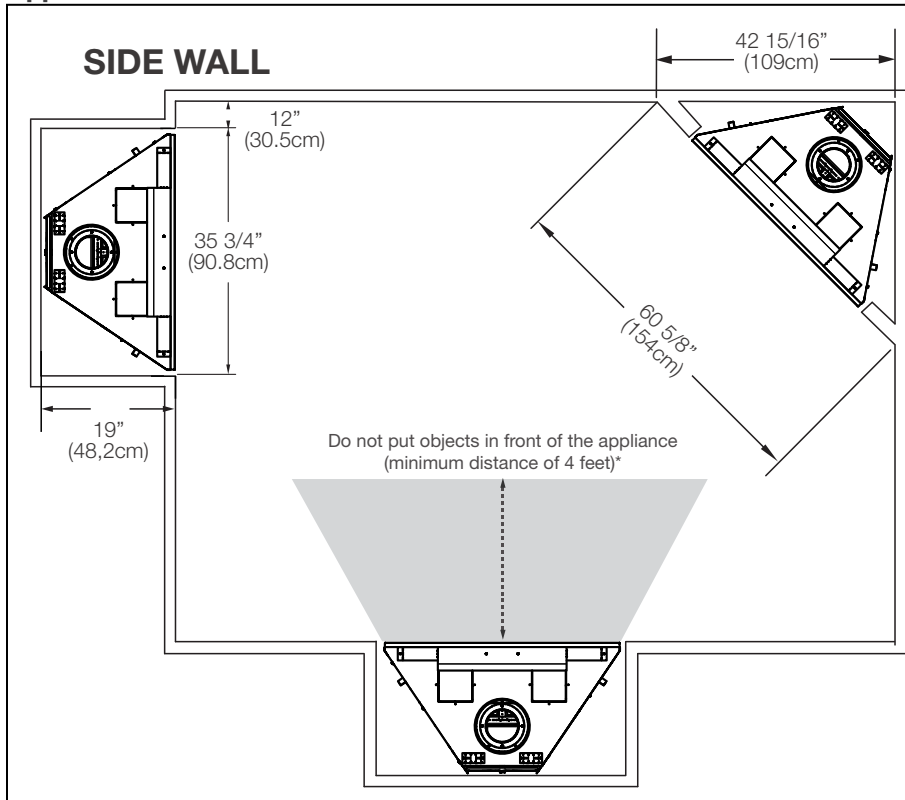

## Combustible Mantel Clearances

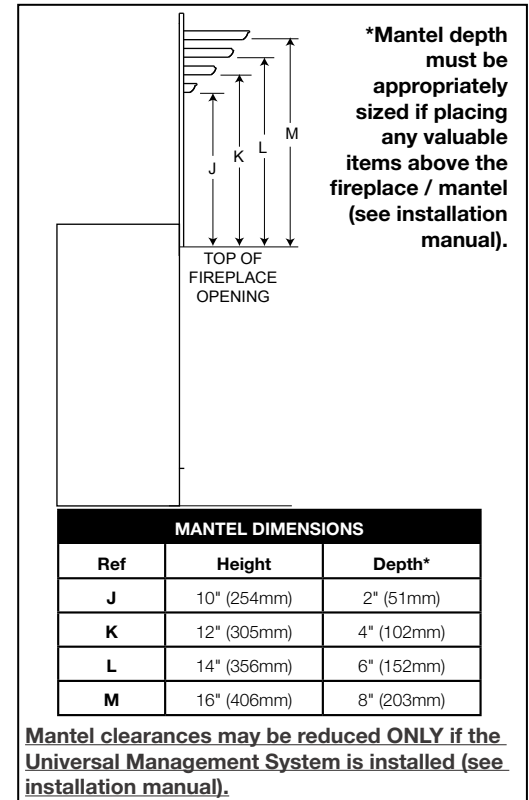


W415-4137 / 12.02.22

# CAX36-1 DIRECT VENT GAS FIREPLACE

Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.


## Wall Penetration

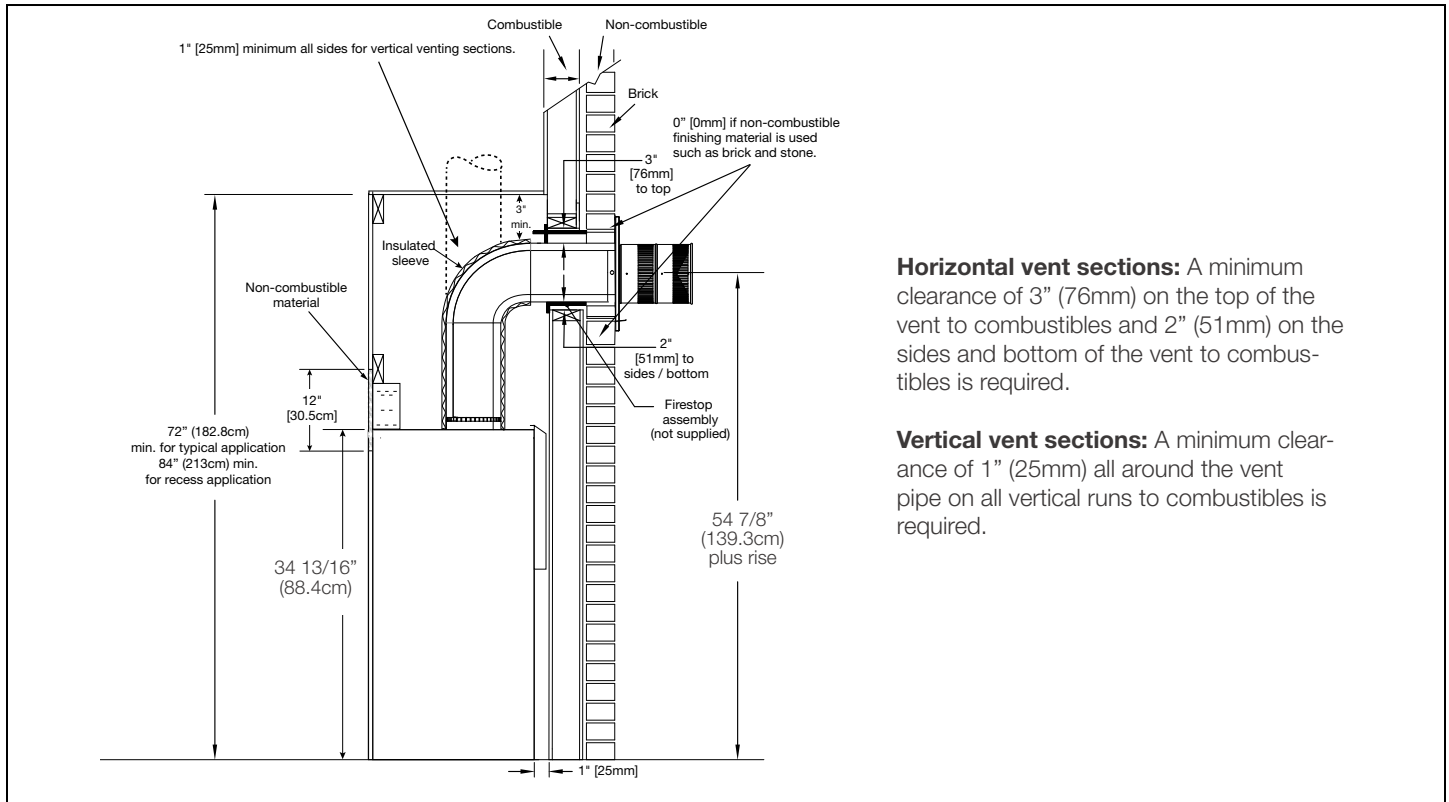

**Horizontal vent sections:** A minimum clearance of 3" (76mm) on the top of the vent to combustibles and 2" (51mm) on the sides and bottom of the vent to combustibles is required.

**Vertical vent sections:** A minimum clearance of 1" (25mm) all around the vent pipe on all vertical runs to combustibles is required.

## Flush & Recessed Framing

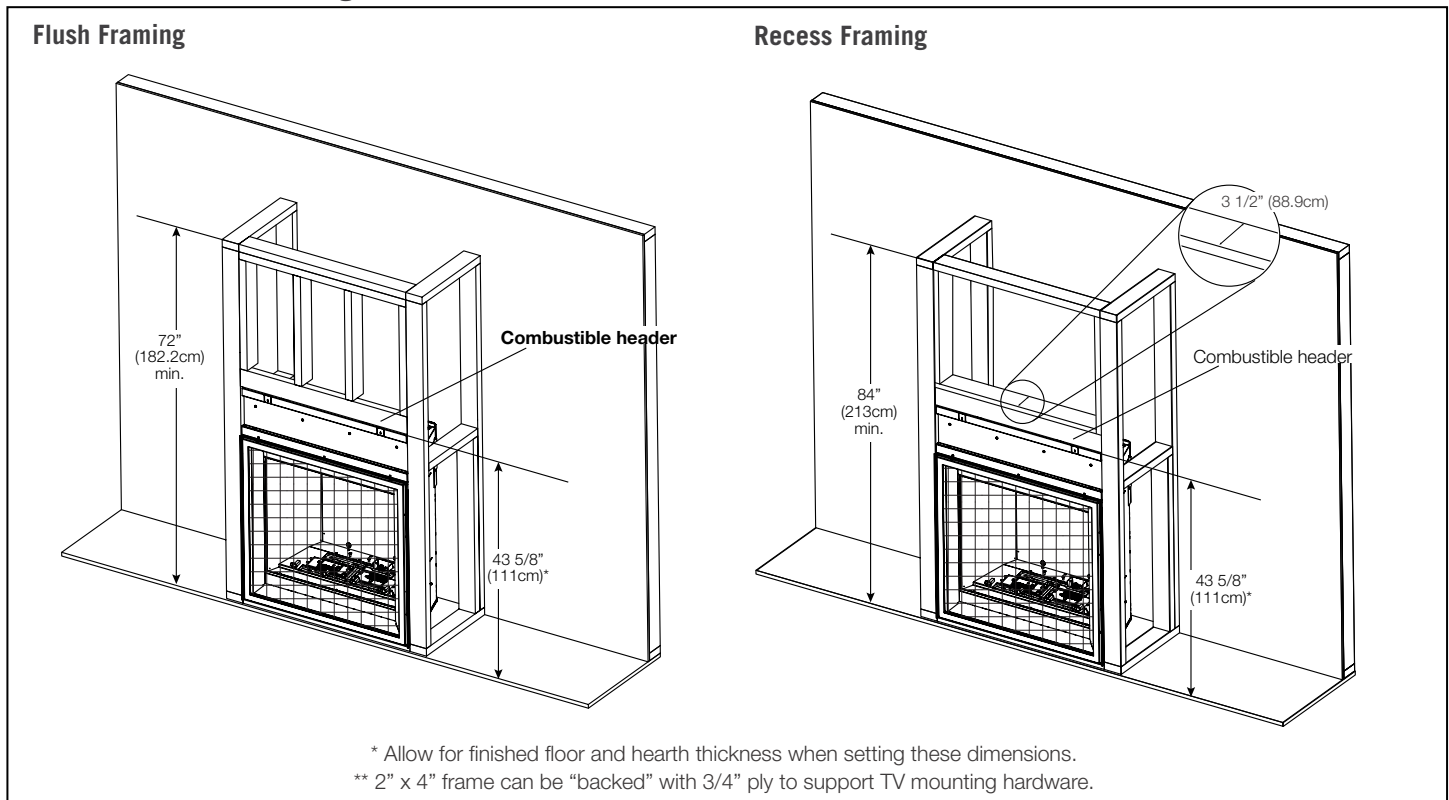


\* Allow for finished floor and hearth thickness when setting these dimensions.

\*\* 2" x 4" frame can be "backed" with 3/4" ply to support TV mounting hardware.


## Spécifications

Modèle	BTU	Largeur		Hauteur		Profondeur		Taille de verre
		Réel	Ossature	Réel	Ossature	Réel	Ossure	
CAX36NTE-1	35 500	35 1/2	35 3/4	34 13/16	43 5/8	18 3/4	19	25 11/16 x 30 3/8
CAX36PTE-1	34 000							


## Dimensions

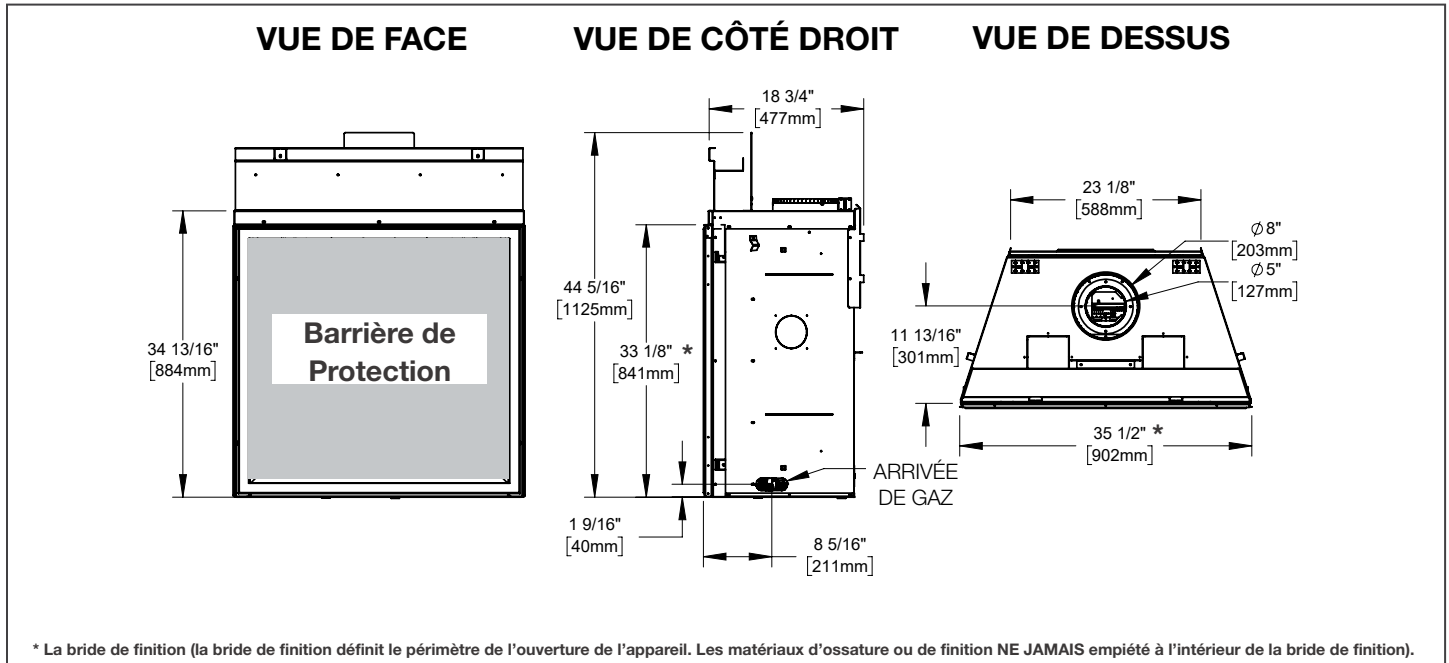

## Emplacement de l'Appareil

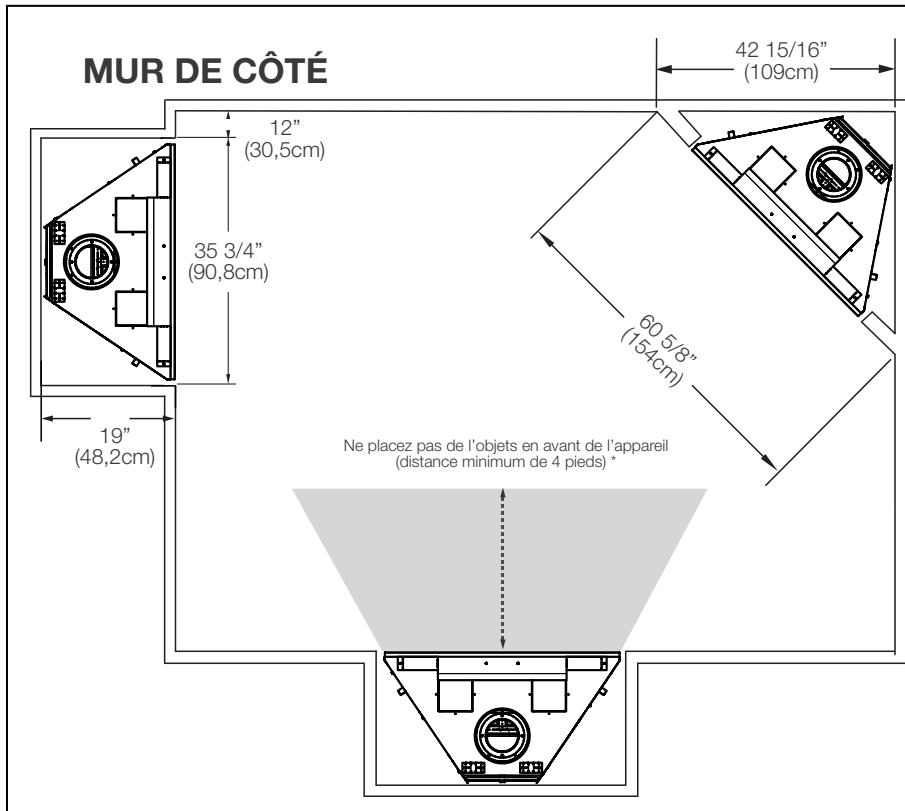


## Dégagements Combustible de la Tablette

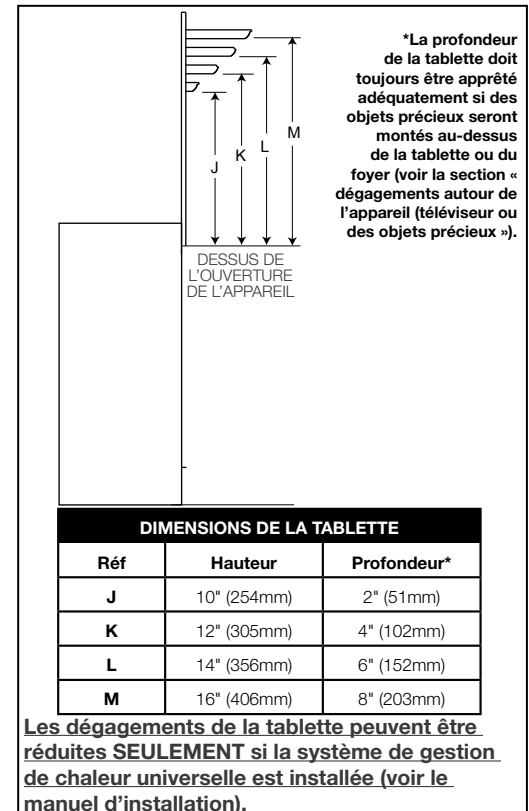

L'information du produit fourni n'est pas complet et est sujet de changer sans préavis. Consultez le manuel d'installation pour information d'installation actuel.

## Pénétration du Mur

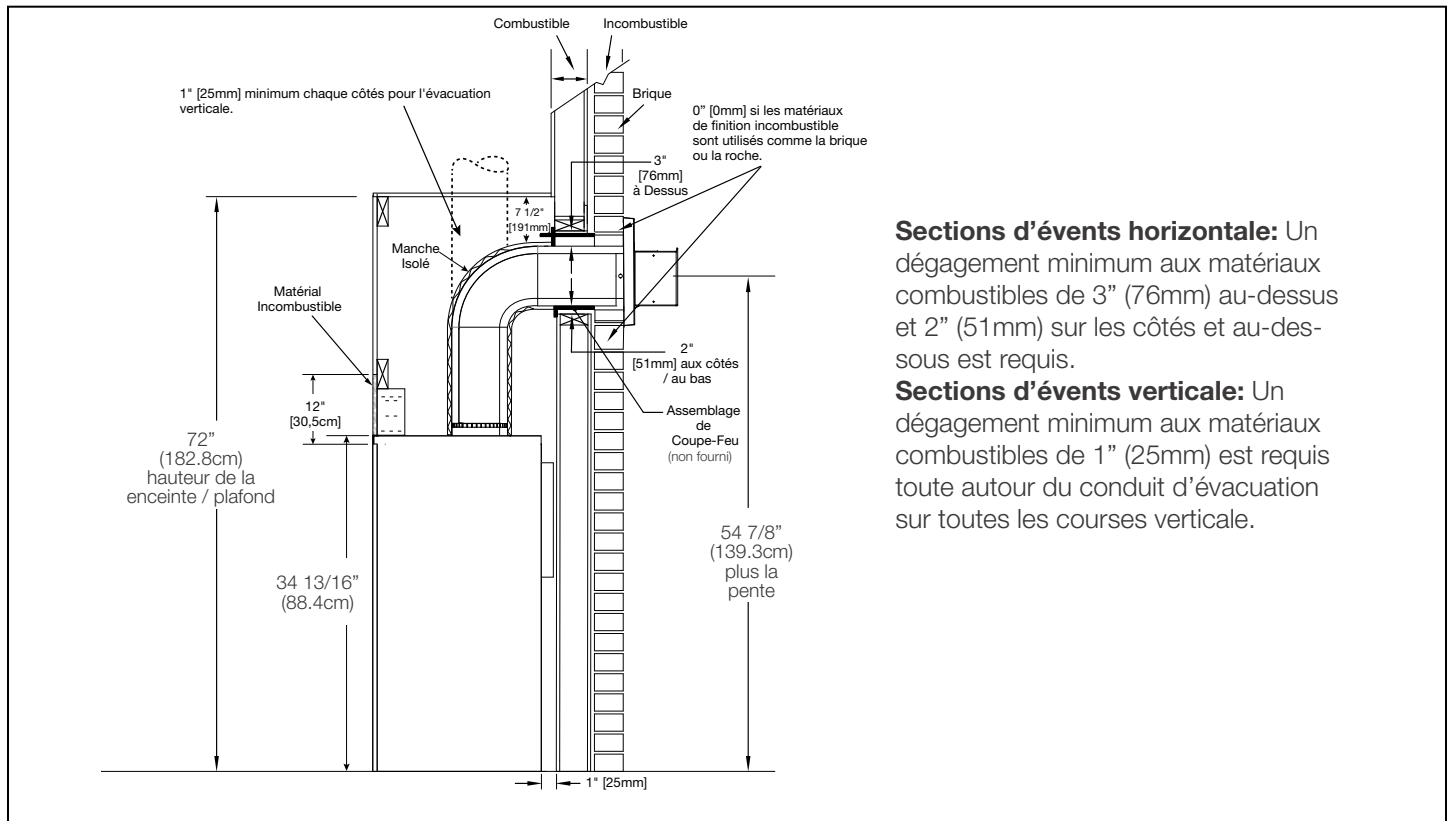

## Encadrement Affleuré et Encastré

