



TD-SILENT

5211364500 - TD-250/100 SILENT T (230-240V 50/60) RE - IN-LINE DUCT FANS



Range of low profile in-line mixed flow duct fans manufactured in tough reinforced plastic. The unique design of the support bracket allows the motor and impeller assembly to be fitted or removed without dismantling the adjacent ducting.

Motors

Single phase 1-speed motors 230V-50Hz. (models from 160 to 350)
 Single phase 3-speed motors, 230V-50/60Hz. (models from 500 to 800)
 Class B, with ball bearings and safety thermal overload protection. IP44.
 Versions fitted with a run-on-timer adjustable within 1 and 30 minutes.
 MIXVENT TD-T not suitable for speed control.

Theoretical Working Point

Airflow	-
Static Pressure	0,000 N/m ²
Temperature	20 °C
Altitude	0 m
Density	1,2 kg/m ³
Frequency	50 Hz

Construction

Discharge diameter	100 mm
Fan size	100
Weight	4,63 kg


Motor Characteristics

Number of poles	2
Voltage	1-230V-50Hz
Maximum absorbed current	0,1 A
IP Rating	IP44
Motor insulation class	B

Working Point


Fan speed	2140
-----------	------

Drawing

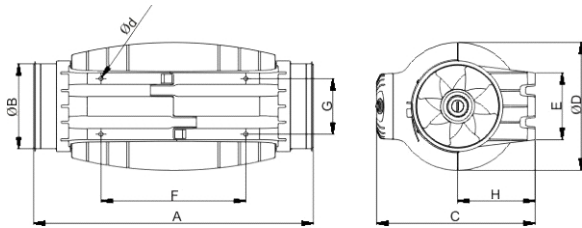

A	B	C	D	E	F	G	H	d
575	97	252	204	100	250	83	121	5.4

Performance Chart

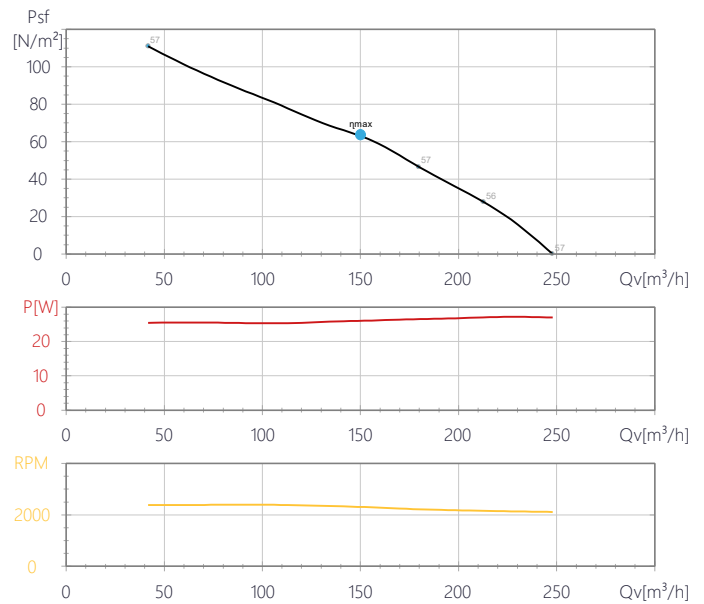



TD-SILENT

5211364500 - TD-250/100 SILENT T (230-240V 50/60) RE - IN-LINE DUCT FANS

Sound Performance

	63	125	250	500	1k	2k	4k	8k	Overall
Inlet (LwA)	26	32	46	53	53	44	38	30	57
Inlet LpA @ 1m	15	21	35	42	42	33	27	19	46
Outlet (LwA)	30	33	45	53	46	40	36	28	55
Outlet LpA @ 1m	19	22	34	42	35	29	25	17	44
Surrounding (LwA)	26	28	40	40	36	31	25	18	44
Surrounding LpA @ 1m	15	17	29	29	25	20	14	7	33





TD-SILENT

5211364500 - TD-250/100 SILENT T (230-240V 50/60) RE - IN-LINE DUCT FANS

ErP Data

Ecodesign	
Commission regulation (EU) N°1253/2014 of July 2014	
Information requirements (Annex V)	
ProductoComercial	TD-250/100 SILENT T (230-240V 50/60) RE
Identifier	5211364500
SEC average climate (kWh/(m2.an))	-10,6
SEC class	NA
SEC cold climate (kWh/(m2.an))	-27
SEC warm climate (kWh/(m2.an))	-1,2
Typology	RVU unidirectional
Type of drive	1-speed
Type of HRC	None
Thermal efficiency (%)	0
Maximum flow rate (m3/h)	174
Electrical power input at maximum flow rate (W)	25,6
Sound power level (LWA)	41
Reference flow rate (m3/s)	0,034
Reference pressure difference (Pa)	73
SPI (W/m3/h)	0,208
Control factor	1
Control typology	Manual
Maximum internal leakage for BVU (%)	3
Maximum external leakage for BVU and UVU (%)	Not applicable
Mixing rate for BVU without duct connection (%)	Not applicable
Position of visual filter warning	Not applicable
description of visual filter warning	Not applicable
Instructions to install supply grilles	F&W Leaflet
Instructions to install exhaust grilles	F&W Leaflet
https://www.solerpalau.com/	
Airflow sensitivity to pressure variation	Not applicable
Indoor/outdoor air tightness (m3/h)	Not applicable
Annual electricity consumption - Average climate (kWh/a)	261
Annual electricity consumption - Warm climate (kWh/a)	261
Annual electricity consumption - Cold climate (kWh/a)	261
Annual heating saved - Average climate (kWh/a)	1715
Annual heating saved - Warm climate (kWh/a)	776
Annual heating saved - Cold climate (kWh/a)	3355