

## KVK DUO Insulated duct fans

### Run & Standby fan in one casing for non-stop operation



- Twin fan – Run & Standby
- Low noise level
- Suitable for External installation as standard
- Safe and maintenance free operation

[Find more details in our online catalogue](#)

#### Run & Standby

KVK DUO is intended to use for **supply** or **extract** air in a variety of **commercial** and **domestic** applications with high demand for **non-interruptive ventilation**, required according to regulation. For transportation of **clean** or **contaminated** air.

#### Reliability

Corrosion resistance casing, thermal insulation and external terminal box with high protection class permits **outdoor** and **indoor** use. The combination of reliable casing and motor construction ensures to minimize the need for maintenance of the fans and allows long **continuous operation**.

#### Low noise level

KVK DUO has **fully insulated casing**. That ensures a good acoustic insulation in terms of the radiated sound. A wide range of recommended silencers for inlet and outlet allows further noise reduction.

#### Easy maintainance

To ensure long lifecycle it is recommended to inspect the fan according to the manual. The detachable service lid simplify this process and makes the fan **easy to maintain**.

## Features

### Construction

Casing of **EC** models made of magnesium zinc plated sheet metal with corrosion **class C5**. Casing of **AC** models made of galvanized sheet steel, corrosion **class C3**.

**Casing** of all fans is completely acoustically/thermally insulated and has internal surface liner that prevents the migration of insulation fibers into the airstream.

All casings has circular connection **spigots** with **rubber seals**. **EC** models are also equipped with an external **terminal box** with protection class **IP65**.

### Impeller

**AC models** use double inlet radial fans with forward-curved impellers made of sheet steel.

**EC models** use backward curved **radial** impellers. These are from lightweight, hard-wearing fiberglass reinforced **polyamide**.

All impellers dynamically **balanced** and paired with corresponding external rotor motors.

### Motor

Depends on type, fans are equipped with **AC** or high efficient **EC** external rotor motors. All motors are suitable for **50Hz** and **60Hz**.

The input voltage for **EC motors** single phase can vary between 200 and 277V, for three phase between 380 and 480V.

### Motor protection

Models with **AC** motors have prewired integral **thermal contacts TK** with leads to external **motor protection device**.

Models with **EC** motors have an **integrated** electronic **thermal protection**, including **locked-rotor protection** and **soft-start**.

### Control

**EC motor** with **built-in potentiometer** to adjust working point can be also controlled by external **signal 0-10V**.

**AC motor** can be controlled by **5-step** or **stepless** speed regulator

Fans can be **demand controlled** via additional accessories like sensors and controllers for CO<sub>2</sub>, temperature, humidity, presence indication, etc.

### Installation

KVK DUO fans can be installed in any position **indoor** and **outdoor**. Circular spigot with rubber seals is perfectly designed to connect to the circular ducts by using **fast clamps FK preventing vibration** to the duct. A service cover with screw connection and hinges with pins make cleaning and maintenance easy.

## Technical parameters

### Nominal data

Voltage (nominal)	400	V
Frequency	50	Hz
Phases	3~	
Input power	2,818	W
Impeller speed	1,409	rpm
Air flow	max 3.6539	m³/s
Temperature of transported air	max 60	°C

### Sound data

Sound pressure level at 3m (20m² Sabin)	65	dB(A)
---	----	-------

### Protection/Classification

Enclosure class, motor	IP54
Insulation class	F

### Data according to ErP

ErP ready	ErP 2018
-----------	----------

### Dimensions and weights


Duct dimension; Circular, inlet	630	mm
Weight	210	kg

### Others

Duct connection type	Circular
Motor type	EC

Performance

Performance curve

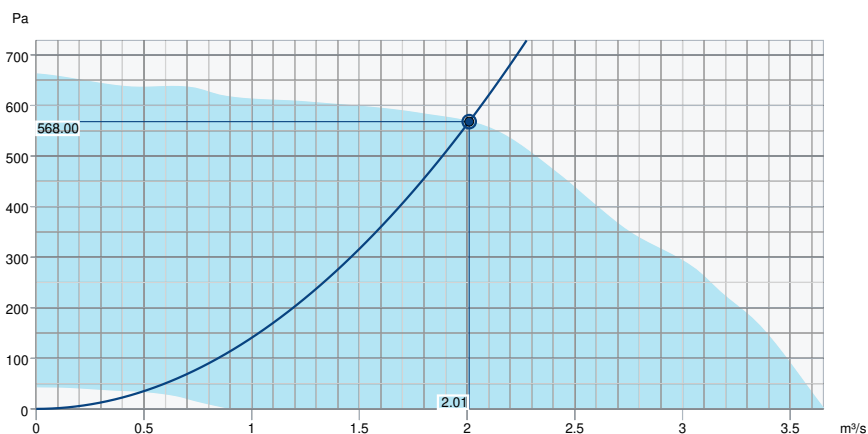

Hydraulic data

Required air flow	2.01 m³/s
Required static pressure	568 Pa
Working air flow	2.01 m³/s
Working static pressure	568 Pa
Air density	1.204 kg/m³
Power	2,397.9 W
Fan control - RPM	1,410 rpm
Current	3.54 A
SFP	1.193 kW/m³/s
Control voltage	10.0 V
Supply voltage	400 V


Sound power level		63	125	250	500	1k	2k	4k	8k	Total
Inlet	dB(A)	64	78	76	72	75	73	68	62	82
Outlet	dB(A)	65	78	77	78	80	78	73	64	86
Surrounding	dB(A)	57	63	69	63	60	51	48	45	71
Sound pressure level at 3m (20m² Sabine)	dB(A)	-	-	-	-	-	-	-	-	64
Sound pressure level at 3m free field	dB(A)	-	-	-	-	-	-	-	-	50

Accessories

**Ecodesign**

Ecodesign		
ErP compliance		2018
Unit category		NRVU
Drive		Integrated VSD
Unit type		UVU
Heat recovery type		None
Temperature ratio (UVU)		Not applicable
qv nom	2.0097	m <sup>3</sup> /s
P nom	2.398	kW
Ps nom	568	Pa
Fan efficiency	47.6	%
External Leakage	5	%
Sound power (LWA)	57	dB(A)

Dimension

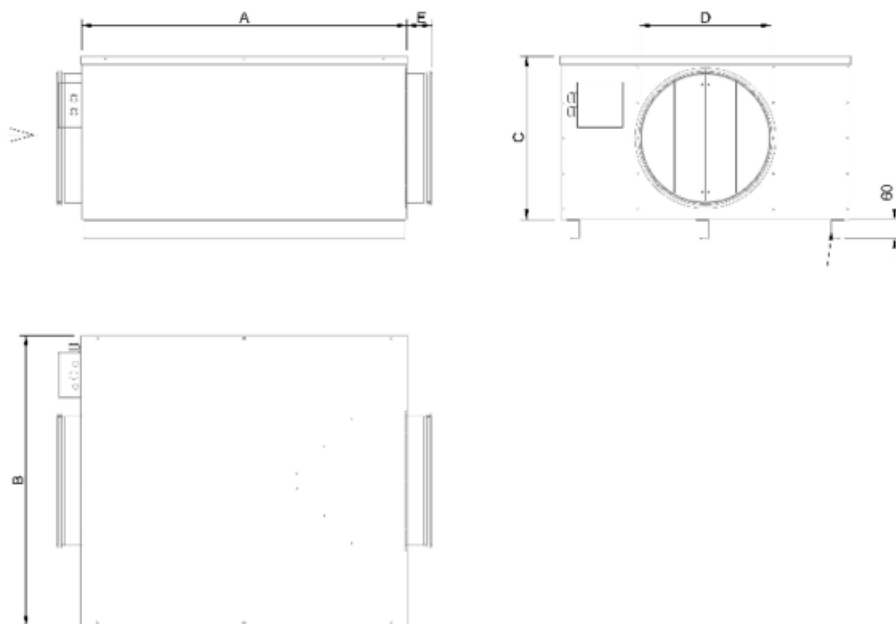

KV DUO	A	B	C	D	E
150	500	360	280	150	40
250	580	430	360	250	60
315	740	650	425	315	60
400	1000	895	505	400	65
500	1265	940	605	500	80
630	1383	1205	884	630	80

## Accessories

- CXE/AVC Modbus (37256)
- EC-Basic-H humidity (24807)
- EC-Basic-U universal 0-10V (24806)
- EC-Vent control board (3115)
- MTP 10, 10K, Speed control (32731)
- Potentiometer MTP 20, 0-10V (310220)
- Step switch S-5EC, 0-10V (76738)
- HR1 Room Humidistat (215150)
- RT 0-30 Room Thermostat (5151)
- EC-Basic-CO2 and temperature (24808)
- EC-Basic-T temperature (24805)
- EC-Selector (9908)
- EC-Vent Room Unit (3018)
- MTV-1/010 Controller 0..10V+ (30650)
- Pressure controller PCA 1000D2 (76739)
- Step switch S-5EC-2, 0-10V (449084)
- Presence detector/IR24-P (6995)
- ACO8AC/EC ACO Panel IP40 (93042)

## Documents

- INSTALLATION\_\_OPERATION\_AND\_MAINTENANCE\_INSTRUCTION\_KV\_DUO\_\_KVK\_DUO\_\_KVK\_003\_\_EN.PDF
- COMMISSIONING\_RECCORD\_FANS\_\_EN.PDF