

KVK Insulated duct fans

Insulated radial fan for limited spaces

- Design for limited installation height
- Very low noise, acoustic and thermal insulation
- Corrosion resistance of casing C4
- Indoor and outdoor installation
- Easy maintenance, service cover

[Find more details in our online catalogue.](#)



Flexibility

The KVK Silent fans **combine** a high efficient **fan** and **casing** with perfect **acoustic** and **thermal** insulation capacity. The KVK Silent fans are intended to use for **supply** or **extract** air, designed to be installed in **any position**. This ensures that the fans can be used in a variety of **commercial and domestic** applications.

Reliability

Construction of casing and thermal insulation permits **outdoor** and **indoor** use. The combination of reliable casing and motor construction ensures to minimize the need for maintenance of the fans and allows long **continuous operation**. Thanks to service lid it is **easy to clean**.

Performance

High performance impeller together with **high efficient** external rotor motor are designed to ensure high-level performance to **minimize power consumption** and **maximize efficiency**.

Noise

Partly or **fully insulated** casing (depends on model) is perfectly designed to **reduce noise** mainly to **surrounding** and partly to **inlet/outlet**.

Certifications



Ecodesign (ErP) compliant

Features

Construction

Casing of all KVK fans made of **AluZinc 185**, corrosion **class C4**.

KVK Slim has acoustically/thermally **insulated lid**. **KVK Silent** has acoustically/thermally **insulated lid and casing**. Insulation made of **rockwool** and has surface liner that prevents the migration of fibers into the airstream.

Casing has connection **spigot** with **rubber seals** and is equipped with an external **terminal box with** protection class **IP54**.

Impeller

KVK Slim/Silent fans use backward curved **radial** impeller. These are from lightweight, hard-wearing fiberglass reinforced **polyamide** (for sizes up to 250) or reinforced **polypropylene**, dynamically **balanced** and paired with corresponding external rotor motors.

Motor

Depending on type, fans are equipped with **AC** or high efficient **EC** external rotor motors. All motors are suitable for **50Hz** and **60Hz**.

Motor protection

Sizes **100-315 mm** with **AC** motors have **integrated** thermal protection with manual (electrical) reset.

Sizes **355-500 mm** with **AC** motors have prewired integral **thermal contacts TK** with leads to external **motor protection device**.

Fans with **EC** motors have an **integrated** electronic **thermal protection**, including **locked-rotor protection** and **soft-start**.

Control

EC motor with **built-in potentiometer** to adjust working point can be also controlled by external **signal 0-10V**.

AC motor can be controlled by **5-step** or **stepless** speed regulator.

KVK fans can be **demand controlled** via additional accessories like sensors and controllers for CO₂, temperature, humidity, presence indication and VAV.

Installation

KVK Slim/Silent fans can be installed in any position **indoor** and **outdoor**. Circular spigot with rubber seals is perfectly designed to connect to the duct by using **fast clamps preventing vibration** to the duct. A service cover with screw connection and hinges with pins make cleaning and service easy.

Technical parameters

Nominal data

Voltage (nominal)	230	V
Frequency	50	Hz
Phases	1~	
Input power	487	W
Input power kW	0.487	kW
Input current	2.38	A
Impeller speed	1,346	rpm
Air flow	max 1.016	m³/s
Capacitance of capacitor	10	µF
Temperature of transported air	max 70	°C
Max temperature of transported air, when speed controlled	70	°C

Sound data

Sound pressure level at 3m (20m² Sabin)	50	dB(A)
---	----	-------

Protection/Classification

Enclosure class, motor	IP54
Insulation class	F

Data according to ErP

ErP ready	ErP 2018
-----------	----------

Dimensions and weights


Duct dimension; Circular, inlet	355	mm
Duct dimension; Circular, outlet	355	mm
Weight	41.5	kg

Others

Motor type	AC
------------	----

Performance

Performance curve

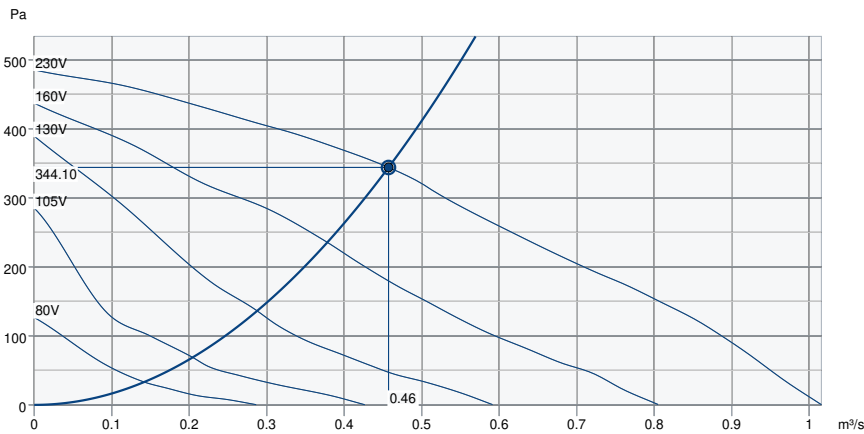

Hydraulic data


Required air flow	0.46 m³/s
Required static pressure	344 Pa
Working air flow	0.46 m³/s
Working static pressure	344 Pa
Air density	1.204 kg/m³
Power	426.5 W
Fan control - RPM	1,374 rpm
Current	2.11 A
SFP	0.933 kW/m³/s
Control voltage	230.0 V
Supply voltage	230 V

Sound power level		63	125	250	500	1k	2k	4k	8k	Total
Inlet	dB(A)	51	69	61	58	58	58	55	48	71
Outlet	dB(A)	51	67	60	57	57	58	54	47	69
Surrounding	dB(A)	33	52	50	49	46	46	49	41	57
Sound pressure level at 3m (20m² Sabine)	dB(A)	-	-	-	-	-	-	-	-	50
Sound pressure level at 3m free field	dB(A)	-	-	-	-	-	-	-	-	36

Ecodesign


Product	
Trade name	Systemair
Product name	KVK Slim 355
Ecodesign	
ErP compliance	2018
Unit category	NRVU
Drive	External MSD or VSD
Unit type	UVU
Heat recovery type	None
Temperature ratio (UVU)	Not applicable
qv nom	0.457 m ³ /s
P nom	0.426 kW
Ps nom	344 Pa
Fan efficiency	36.9 %
External Leakage	0.9 %
Sound power (LWA)	50 dB(A)

Dimension

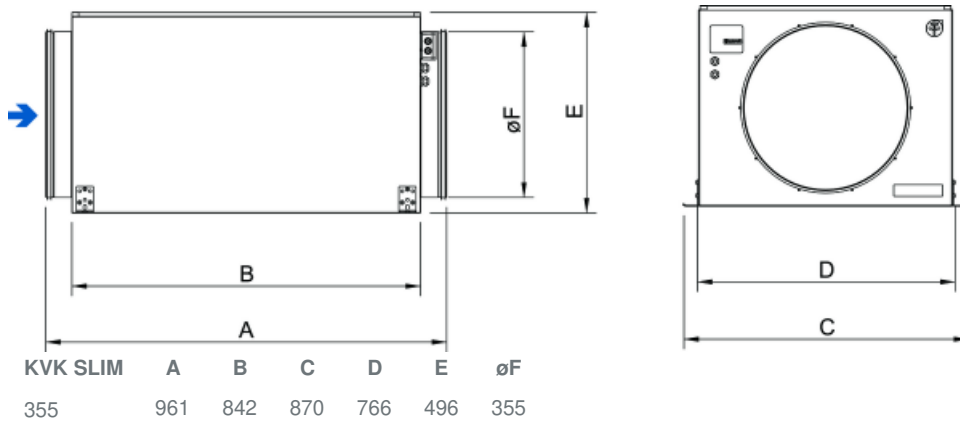

Wiring

Sign	Color
YE	Yellow
BU	Blue
GN	Green
BN	Brown
BK	Black
GY	Grey

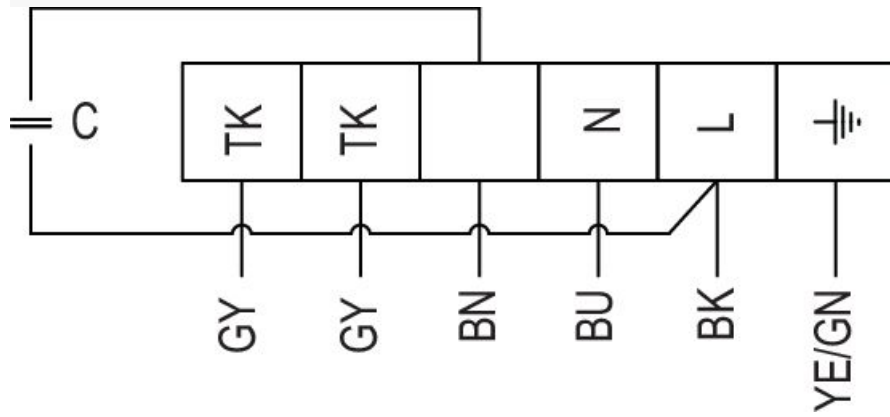

Accessories

- FFR 355 Filter cassette (1782)
- REE 4 Speed control (5317)
- RETP 6 Temp/Pressure regulator (32293)
- REV-5POL/05-7,5kW R/Y (33979)
- SG 355 Protection guard (5612)
- Frequency converter FRQSE-6A (37419)
- RT 0-30 Room Thermostat (5151)
- CB 355-6,0 400V/2 Duct heater (5388)
- CBM 355-9,0 400V/3 Duct heater (5486)
- FGR 355 Filter cassette (1821)
- LDC 355-900 Silencer (5399)
- VBF 355 Water heating battery (1735)
- Frequency converter FRQ5SE-6A (37421)
- REPT 6 Digital regulator (5698)
- REU 3 Speed control (5005)
- RTRE 3 Speed control (5009)
- DTV500A (96807)
- HR1 Room Humidistat (215150)
- CB 355-12,0 400V/3 Duct heater (5390)
- CB 355-9,0 400V/3 Duct heater (5389)
- CBMF 355-9,0 400V/3 Duct heater (12443)
- FK 355 Fast clamp (1614)
- RSK-355 Back draft dmp. (9972)
- VK-35 Louvre shutter (5642)

Documents

- INSTALLATION__OPERATION_AND_MAINTENANCE_INSTRUCTION_KV_DUO__KVK_DUO__KVK_003__EN.PDF
- COMMISSIONING_RECORD_FANS__EN.PDF