

# Technical Data Sheet

CODE 12615

## VORTICE 150/6" AR-LL-S

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,17	Voltage (V)	220-240
Absorbed Power max (W)	35	Weight (Kg)	2,07
Frequency (Hz)	50-60	Delivery max - Extract (l/s)	105,6
Inlet	Automatico	Delivery max - Extract (m3/h)	380
Insulation Class	II°	Delivery max - Intake (l/s)	59,7
IP	X4	Delivery max - Intake (m3/h)	215
Max absorbed Power at 60Hz (W)	35	Delivery max (m³/h)	380
Max ambient temperature for continuous operation (°C)	50	RPM	2110
Max ambient temperature for continuous operation 60Hz (°C)	50	Rpm - Exhaust	2110
Ø Discharge Hole (mm)	150	Rpm - Supply	2520
		Sound Pressure level Lp [dB (A)] 3m	49,6

### DIMENSIONS

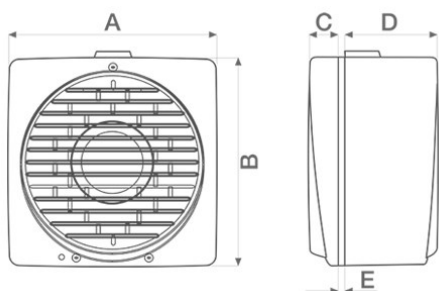

Ø glass hole	185/190
Ø wall hole	185/190
Size A (mm)	215
Size B (mm)	218
Size C (mm)	31
Size D (mm)	97,5
Size E (mm)	2/38

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 12615

## VORTICE 150/6" AR-LL-S



Wall/window axial fans




### DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

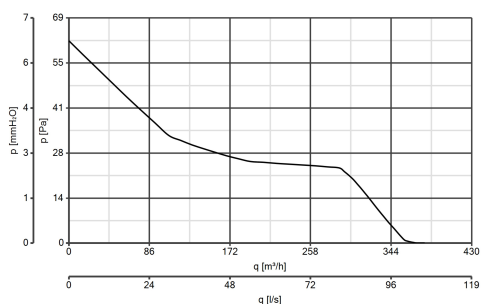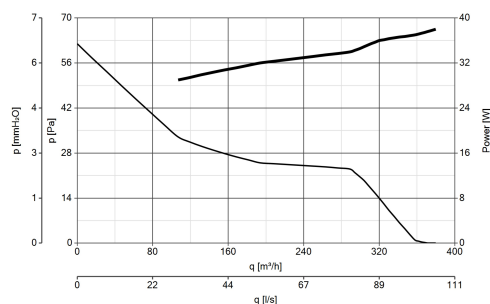

### ACCESSORIES



#### KIT TE 150/6" (TORRETTA)

Code 13001



#### KIT MU (MURO)

Code 13018



#### KIT WV 150/6" (DOPPI VETRI)

Code 13021



#### KIT FF 150/6" (DOPPIA FINESTRA)

Code 13024



#### CR5N

Code 12941



#### CR5

Code 12943



#### CREN

Code 12944



#### CTIMER

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premando 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

**C PIR**  
Code 12998

**C TIMER**  
Code 12999