



Fish Tank Assembly Instructions

AD-1060 BK/WT/RD AD-1260 BK/WT/RD
 AD-1560 BK/WT/RD AD-1760 BK/WT/RD
 AD-1980 BK/WT/RD

1. Unpack fish tank and stand from their shipping boxes.
2. Remove parts, pump, LED and anything else inside of the tank.
3. Identify all parts shown in Diagram I, as well as rubber O-rings, LED lights and the included water pump.
4. Use a level to check your setup location and orientation.
5. Move the stand to the setup location and then place tank on top of the stand, making sure that all four corners are lined up. Leave a small gap behind the tank for power cables.
6. Remove the lid of the tank and set aside.
7. Follow instructions A-E on Diagram II using **part J** from Diagram I.
8. Attach the ends to the downflow pipe © (from right to left of cabinet top.)
11. Follow instructions 1-9 on Diagram II using **parts A, B, C, D and E.**
12. Place the pump inside the furthest right compartment of the sump, running power cord through the hole in the cover.
13. Attach **part A** to the upflow return pipe and **part A** to the pump through the hole in the sump cover. (far right side of cabinet, top and bottom respectively).
14. Fill each compartment with filter media according to labels.
15. Unpack LED lights and place into slots on lid.
16. Put lid on top of tank, slotting cables through hole on right.
17. Plug in LED lights to the wall outlet or power strip.
18. Fill tank, plug in pump once compartment fills, cycle 10 times.

Diagram I

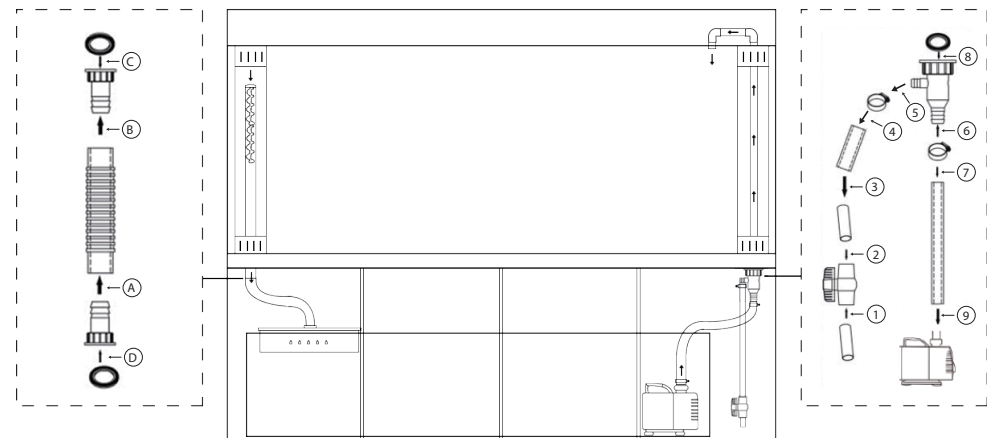


Diagram II

