


A modern, high-performing downlight suitable for commercial and residential applications. Die cast aluminium body with a high efficiency reflector and clear polycarbonate lens. High quality LED technology ensures the luminaire's long life while maintaining colour quality.




### Luminous Intensity Distribution Diagram

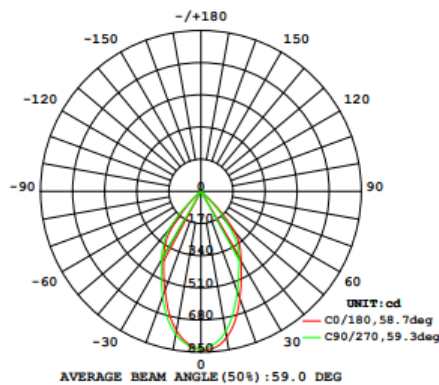

### Ordering Information

Code	HUNTER	CCT	Colour	Dimming	
Example	HR-1028	-W30	-W	-T	
CCT	Code	Colour	Code	Dimming	Code
2700K	W27	White	W	Trailing Edge	T
3000K	W30	Black	B	1-10V	A
4000K	W40	Custom	C	DALI	D

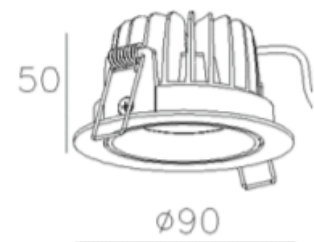

### Mechanical

Installation	Recessed
Housing Material	Aluminium
Lens Material	Clear Polycarbonate
Ingress Protection	IP20
Luminaire Diameter	90mm
Cut-out Diameter	83mm
Luminaire Depth	50mm
Adjustable	Max. Tilt ±25°

### Electrical

Driver Included	Yes
Voltage Input	230V AC
Drive Current	220mA

### Light Source

LED Manufacturer	Cree
LED Series	CXA1507
Beam Angle	60°
Luminaire Lumens	800lm
Luminous Efficacy	80lm/W
Luminaire Power	10W
Colour Rendition (CRI)	Ra 92
Colour Consistency	SDCM 3
Light Output Degradation	B10
Lumen Maintenance	L90
Lifetime	60,000 hours

