

Care & Maintenance

Scuff marks may be removed with a damp cloth. Occasional use of furniture polish will maintain the good looks of your cot. Periodically check all screw fixings to ensure they remain tight.

Assembly

It is preferable for two people to assemble the cot in the room in which it is to be used and to follow the sequence as pictured. Unpack the cot carefully and unwrap each part taking care not to lose the plastic bag of small items. Check the contents against the list of parts

Tools

Allen Key - Supplied

List of Parts

- | | |
|---------------------------|---|
| 1. Cot head board..... | 1 |
| 2. Cot foot board..... | 1 |
| 3. Fixed cot side..... | 1 |
| 4. Dropside..... | 1 |
| 5. Mattress base..... | 1 |
| 6. Bolt (Allen head)..... | 8 |
| 7. Barrel nut..... | 4 |
| 8. Allen key..... | 1 |
| 9. Wheels..... | 4 |
- (Two with locks) (Two without)



Safety

- Do not leave anything in the cot or place the cot on another product, which could provide a foothold for the child to climb out or present a danger of suffocation or strangulation.
- If you leave the child unattended in the cot, always make sure that the dropside is in the highest position and locked properly.
- The safety of the cot could be adversely affected by fitting flammable drapes.
- Be aware of the risk of open fire and other sources of strong heat, such as electric bar fire, gas fires, etc. in the near vicinity of the cot.
- All assembly fitting should always be tightened properly and care should be taken that no screw are loose, because a child could trap parts of the body, or clothing (e.g. string, necklaces, ribbons for babies' dummies), which would pose a risk of strangulation.
- The cot should not be used if any parts are damaged or lost and use only spare parts approved by the manufacturer.
- The thickness of the mattress used shall be such that the internal height (surface of the mattress to the upper edge of the bed frame) is at least 500mm in the lowest position of the cot base and at least 200mm in the highest position of the cot base. The surface of the mattress shall not reach higher than the bench mark on cot head board.
- Do not use more than one mattress in the cot.

清潔及保養

擦痕可用濕布抹除，偶而打蠟可保持光潔，經常檢查所有組件以確保穩固。

裝嵌

此床最好是有兩人在使用之房間裝嵌，並且依隨安裝圖次序。小心拆除每部份的包裝及細組件，檢查以下列出之組件。

工具

六角匙


組件

- | | |
|-------------|---|
| 1. 床頭..... | 1 |
| 2. 床尾..... | 1 |
| 3. 梗隔..... | 1 |
| 4. 上落側..... | 1 |
| 5. 床底板..... | 1 |
| 6. 螺絲..... | 8 |
| 7. 絲模帽..... | 4 |
| 8. 六角匙..... | 1 |
| 9. 床輪..... | 4 |
- (兩個床輪附有安全制) (兩個床輪不附安全制)



安全指引

- 不要擺放物件於床內，或把嬰兒床擺近物品，可導致嬰兒藉此攀爬上床外，或導致窒息或勒死之危險，如窗簾繩等等。
- 當嬰兒無人看顧時，一定要把上落側升起至最高位置及關妥。
- 易燃之覆蓋物可影響使用嬰兒床之安全。
- 小心留意任何接近嬰兒床之火源及發熱之源頭，例如：暖爐，氣體爐等等。
- 所有組件應時常適當地擰緊，注意應無任何螺絲鬆脫，因嬰兒之身體或衣服(例如：繩、頸鍊、奶咀鍊)可因此而被套住，導至有被勒死之危險。
- 如嬰兒床有任何部份損壞或遺失組件，便應停止使用。只可用由廠商認可之配件。
- 床褥厚度之選擇
如用低位置床底板時，床褥面至床頂之高度應至少為500mm。
如用高位置床底板時，床褥面至床頂之高度應至少為200mm。
床褥面不應高過床頂上的界線記號。
- 請勿在嬰兒床上用多於一張床褥。

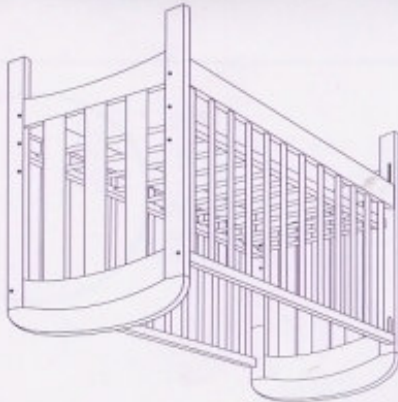

MODEL : CLARA
ITEM NO. : TW-C23Q
MFG NO. : TW-C23Q

0/3 baby



IMPORTANT RETAIN FOR FUTURE REFERENCE
READ CAREFULLY
請閱讀此說明書，並保留作將來參考


Visit our website at www.o3baby.com.hk

Tel : (852) 2422 2101
Kwai Chung, Hong Kong.
Marvel Industrial Building,
25-31 Kwai Fung Crescent,
Block A, 7/F, Unit J,

Distributed by CHUP SHING TRADING CO. LTD.




1. FIXING DROP SIDE 安裝上落閘



Remove any clear plastic cover on the metal pin at drop sides. Pull back on the trigger to pull back the metal pin. Slot the plastic block into the square hole on the cot end. Whilst...

把鐵芯上任何透明膠套脫掉。將上落閘之鎖制拉後，把膠粒套入床頭或床尾腳坑內，放開鎖制使鐵芯滑落在膠坑內少許，然後...




...slotting the bottom pin into the lower groove. Repeat the above step for the other ends of drop sides.

...才將上落閘底部之鐵芯套入較下之木坑內。重複以上步驟，安裝另一端之上落閘。



2. FIXING MATTRESS BASE 安裝床底板

Select a height (high/medium/low) position
先選擇床底板安裝位置(高/中/低)。

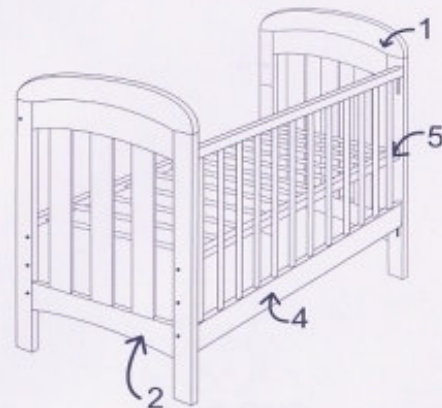



Mattress base shall be placed flat inside the cot. Fixed the mattress base at four ends with the bolts as pictured. Insert Barrel nut B into hole in mattress base from bottom up. Do not tighten the screws at this stage.

將床底板平放於床架內，用螺絲把4端床底板先固定位置。把絲帽由下向上放入床底板，此時不須扭緊所有螺絲。



3. FITTING FIXED SIDE 安裝梗閘

Position the fixed cot side at four ends with the bolts.
以螺絲把梗閘4端固定位置。

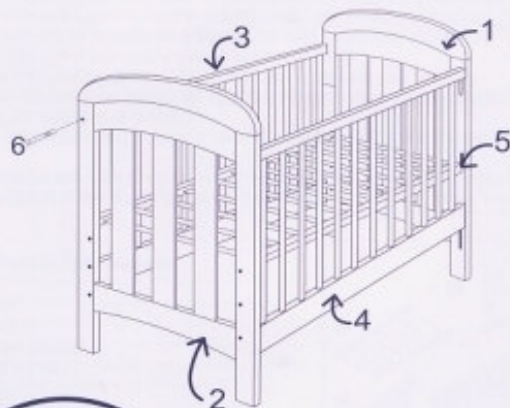


After all bolts have been placed, tighten up with Allen key.

當所有螺絲放入適當位置後，才用六角匙上緊。

4. CHANGING OF MATTRESS HEIGHT 調校床底板

The lowest position is the safest and that the base should always be used in that position as soon as the baby is old enough to sit up.

當嬰兒已懂坐立時，請調教嬰兒床底板至最低位置，這是最安全。

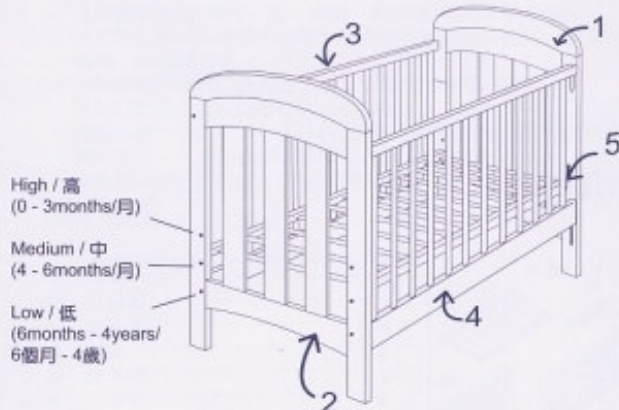


High / 高
(0 - 3months/月)

Medium / 中
(4 - 6months/月)

Low / 低
(6months - 4years/
6個月 - 4歲)

Insert wheels into the holes at the bottom of the cot-ends posts. The same wheels should be located at the same cot-end.

將床輪插入床腳之膠塞內。相同款式的床輪應安裝在同一邊床頭或床尾。



Prevent injury from falls that when the child is able to climb out of the cot, the cot shall no longer be used for that child.

當小童長大至可攀越嬰兒床時，請勿繼續使用該嬰兒床以免意外發生。

The minimum size of mattress to be used with the cot is 1140mm x 540mm. The gap between the mattress and the sides and ends does not exceed 30mm. 最細尺寸可用的嬰兒床床褥為1140 x 540毫米。而嬰兒床與床褥邊的空隙不應多於30毫米。