


SMA-Female Flat Window Passthrough Cable

by WAVEFORM

SKU: ADT-SMAF-FLAT

Main Features:

- SMA-Female to SMA-Female adapter
- 1.6mm flat cable
- 0-6000 MHz
- 50 Ω

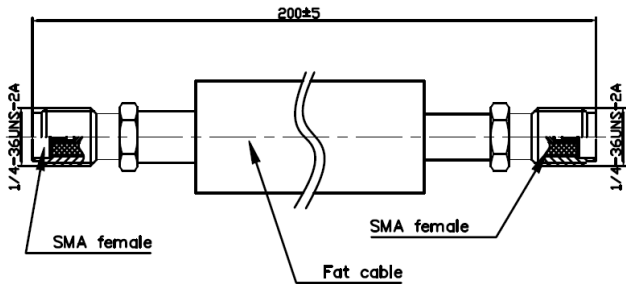

Section Description	Material	Plating
SMA Body	Brass	Gold
Crimping Suite	Brass	Nickel
Inner Conductor	Phosphor Bronze	Gold
Jacket	PE	
Gasket	Silicone Rubber	
Dielectric	PTFE	

Specifications:

Electrical:

Input Impedance	50 Ω
Frequency Range	0 - 6000 MHz
VSWR	≤ 1.2
Capacitance	95.6 pF/m
Velocity	69 %
Insertion Loss (Typical)	< 0.8 dB @ 6000 MHz

Mechanical:

Jacket Color	Black
Cable Type	Mini-1.13
Cable Thickness	1.6 mm / 0.06 in
Cable Width	14.1 mm / 0.5 in
Cable Length	20 cm / 7.8 in
Bending Radius	4 mm / 0.15 in
Connector Type	SMA-Female
Connector Diameter	7.9 mm / 0.3 in
Net Weight	8.5 g / 0.02 lb

Environmental:

Burial Rated?	No
UV Rated?	Yes
Operating Temperature	-40 to +85 deg C



WAVEFORM

3411 W. Lake Center Drive,
Santa Ana, CA 92704

www.waveform.com
1-800-761-3041