

N-Male RS600 Coax Cable Crimp


by WAVEFORM

SKU: RS600-NM-CRIMP



Main Features:

- N-Male Crimp for all 600-type cables
- Solderless Contact Pin
- 0-6000 MHz
- 50 Ω

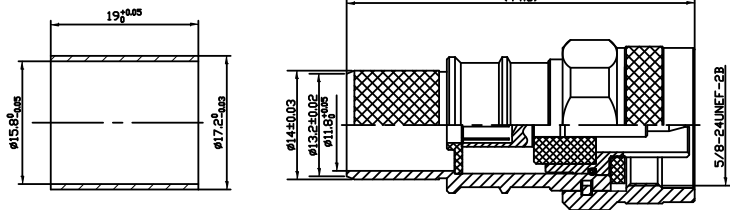

Specifications:

Electrical:

Input Impedance	50 Ω
Frequency Range	0 - 6000 MHz
VSWR	≤ 1.15 (Straight) ≤ 1.25 (Right Angle)
Voltage (Withstand)	500 V rms
Insertion Loss	< 0.05 dB
Contact Resistance	≤ 1 m Ω (center) ≤ 1 m Ω (outer)
Insulation Resistance	≥ 5000 M Ω

Mechanical:

Connector Type	N-Male
Connector Diam.	20.3 mm
Crimp Angle	Straight
Crimp Length	44.8 mm
Net Weight	50 g

Components:

Description	Material	Plating
Body	Brass	Tri-Metal
Center Conductor	Brass	Gold
Crimping Suite	Copper Alloy	Nickel
O-Ring Sealing	6146 Silastic	
Dielectric	PTFE	

Environmental:

Operating Temp.	-65 to +165 deg C
-----------------	-------------------



WAVEFORM

3411 W. Lake Center Drive,
Santa Ana, CA 92704

www.waveform.com
1-800-761-3041