


N-Female Signal Splitter (2-Way, 3-Way, 4-Way)

by WAVEFORM

SKU: SPLT640NF-x

Main Features:

- 600-4000 MHz
- 50 Ω
- 300 W Power Handling

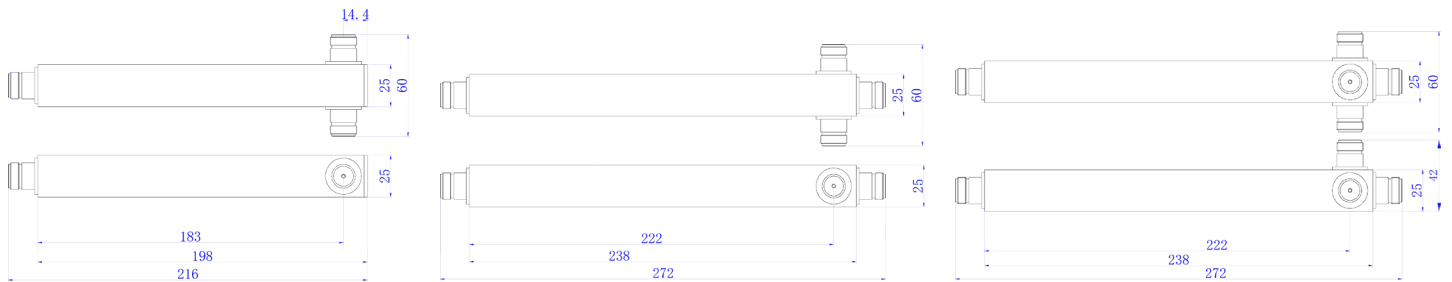

Specifications:

Electrical:

SKU	SPLT640NF-2	SPLT640NF-3	SPLT640NF-4
# of Splits	2-Way	3-Way	4-Way
Frequency Range	600-4000 MHz		
Input Impedance	50 Ω		
Insertion Loss (Typical)	≤ 0.3 dB		
Distribution Loss	3.0 dB	4.8 dB	6.0 dB
VSWR	≤ 1.25		
PIM (IM3)	≤ -154 dBc @ +43 dBm*2		
Power Rating (Average)	300 W		

Environmental:

Applied Environment	Indoor / Outdoor
Protection Class	IP65
Relative Humidity	5 to 95 %
Operating Temperature	-25 to +70 deg C

Mechanical:

SKU	SPLT640NF-2	SPLT640NF-3	SPLT640NF-4
Connector Type	N-Female		
Connector Material	Copper		
Cavity Color	Black		
Cavity Material	Silver Plated Aluminum		
Inner Conductor Material	Silver Plated Copper		
Dimensions	216 x 60 x 25 mm	272 x 60 x 25 mm	272 x 60 x 42 mm
Net Weight	0.34 kg	0.43 kg	0.48 kg



WAVEFORM

3411 W. Lake Center Drive,
Santa Ana, CA 92704

www.waveform.com
1-800-761-3041