



RSRF 4.3-10 Female Signal Taps/Couplers

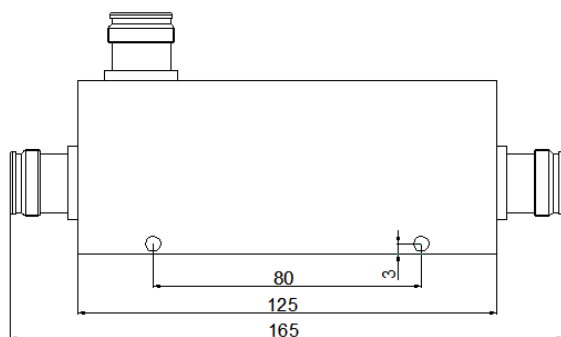

Features:

- Wide bandwidth
- Low PIM, Low VSWR
- High quality, High reliability
- Low Insertion Loss

Specifications:

	5dB Coupler	6dB Coupler	7dB Coupler	10 dB Coupler
Model Number	CPL727-4310-5	CPL727-4310-6	CPL727-4310-7	CPL727-4310-10
Frequency Range	698-2700MHz			
Insertion Loss	≤2.0dB	≤1.7dB	≤1.5dB	≤0.8dB
In-band Ripple	±0.8dB	±0.8dB	±0.8dB	±1.0dB
VSWR	≤1.2			
Directivity	≤20			
Power Handling	300W			
Impedance	50Ω			
Connector Type	4.3-10-Female			
Applied Environment	Indoor / Outdoor			
Relative Humidity	5 to 95%			
Operating Temperature	-25 to +70°C			
Protection class	IP65			
Material	Cavity: Aluminum; Connector: Copper			
Processing	Silver plated cavity and inner conductor			
Dimensions	165*71.5*26mm			
Weight	0.35Kg			