



## RSRF Microstrip 4.3-10 Power Splitters

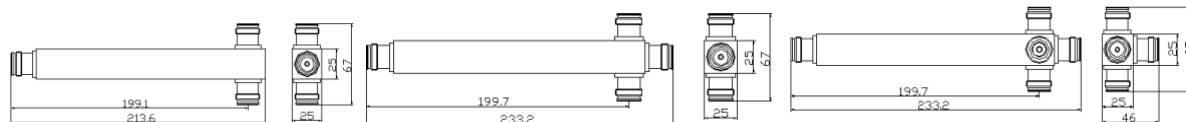

### Features:

- Multiple-Band Frequency Ranges
- Low PIM, Low VSWR
- High quality, High reliability
- In-building Systems (DAS)

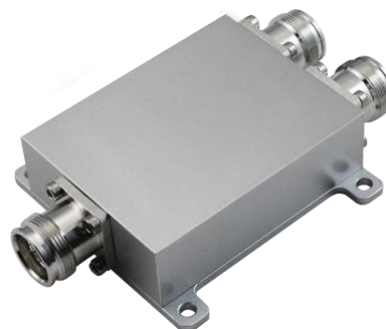

### Specifications:

	2-way Splitter	3-way Splitter	4-way Splitter
Model Number	SPLT727-4310-2	SPLT727-4310-3	SPLT727-4310-4
Frequency Range		698-2700MHz	
Insertion Loss	≤0.4dB	≤0.6dB	≤0.7dB
Distribution Loss	3dB	4.8dB	6dB
VSWR		≤1.25	
Isolation		>20dB	
Power Handling		50W	
PIM (IM3)		≤-150dBc @+43dBm*2	
Impedance		50Ω	
Connector Type		4.3-10-Female	
Applied Environment		Indoor / Outdoor	
Relative Humidity		5 to 95%	
Operating Temperature		-25 to +85°C	
Protection class		IP65	
Dimensions	118x61x26mm	146x93x26mm	140x123x26mm