


RSRF 75 Ohm Lightning Surge Protector Kit

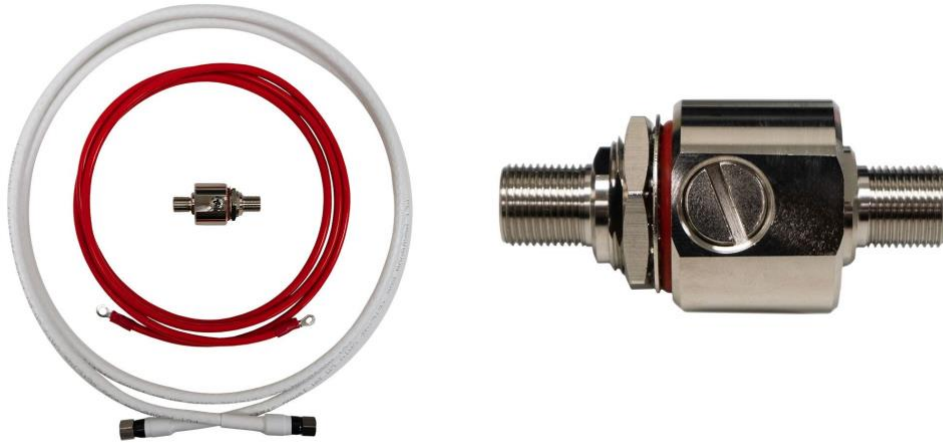

Features:

- F Female to F Female
- 0-3G Frequency range
- 5' jumper cable
- Copper Grounding Wire

Specifications:

Model Number	RSRF-LSP-75
Frequency Range	0-3 G
VSWR	$\leq 1.2:1$ (0-3G)
Insertion Loss	≤ 0.4 dB
Gas Tube Breakdown	230V
Impedance	75 Ω
Connector Type	N-Female to Bulkhead N-Female
Connector Body Material	Tri-Metal Plated Brass
Pin Material	Gold Plated Brass
O-Ring Material	Rubber
Operating Temperature	-67 to +311F
Dimensions	19.65x9.84x9.84 (49.9x25x25 mm)
Weight	0.286 lbs (0.13 kg)
