



Recognized by most people as a “traditional” radiator, the Gov-Free provides heat in a low profile package. Radiant heat combines with convected heat to shield outer walls and windows, thus stopping cold air infiltration into living spaces.

- Free-standing
- Lower and slimmer than most conventional radiators
- Cast iron provides very quiet operation
- Offered in 3 sizes and up to 56 sections, which easily enables the installation of multiple units
- Efficient radiator replacement option
- Suitable for water or steam applications


Optional Pedestals for Gov-Free are also available



Ratings

Dimensions/Specifications

Section	Size (inches)		
	4 x 19	4 x 25	6 x 25
A	15-7/16	21-7/16	21-7/16
B/C	4-7/16	4-7/16	6-15/16
D	2-1/2	2-1/2	2-1/2
E	1-1/16	1-1/16	1-1/16
F	19	25	25
H	17-13/16	23-13/16	23-13/16
Water Content (gal./sect)	0.08	0.12	0.17

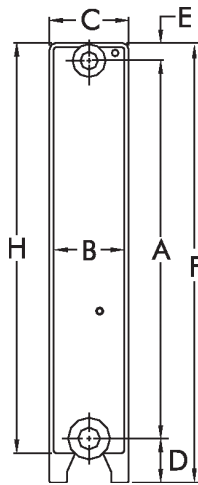

- Top tapings 1" NPT
- Bottom tapings 1-1/4" NPT
- All air vent tapings 1/8" NPT
- Maximum working pressure 15 psi steam, 30 psi water

Ratings per Section

STEAM	4 x 19	4 x 25	6 x 25
		384 BTU	480 BTU

WATER TEMP at °F	4 x 19	4 x 25	6 x 25
220	400 BTU	500 BTU	750 BTU
215	384 BTU	480 BTU	720 BTU
210	368 BTU	460 BTU	690 BTU
200	336 BTU	420 BTU	630 BTU
190	304 BTU	380 BTU	570 BTU
180	272 BTU	340 BTU	510 BTU
170	240 BTU	300 BTU	450 BTU
160	208 BTU	260 BTU	390 BTU
150	176 BTU	220 BTU	330 BTU

Number of Sections	Length 1-3/4" per Section (inches)	Square Feet - EDR		
		4-Tube		6-Tube
		19" High	25" High	25" High
4	7	6.4	8	12
6	10-1/2	9.6	12	18
8	14	12.8	16	24
10	17-1/2	16.0	20	30
12	21	19.2	24	36
14	24-1/2	22.4	28	42
16	28	25.6	32	48
18	31-1/2	28.8	36	54
20	35	32.0	40	60
22	38-1/2	35.2	44	66
24	42	38.4	48	72
26	45-1/2	41.6	52	78
28	49	44.8	56	84
30	52-1/2	48.0	60	90
32	56	51.2	64	96
34	59-1/2	54.4	68	102
36	63	57.6	72	108
38	66-1/2	60.8	76	114
40	70	64.0	80	120
42	73-1/2	67.2	84	126
44	77	70.4	88	132
46	80-1/2	73.6	92	138
48	84	76.8	96	144
50	87-1/2	80.0	100	150
52	91	83.2	104	156
54	94-1/2	86.4	108	162
56	98	89.6	112	168