




# REPLACEMENT STAINLESS STEEL TRASH CHUTE DOOR, BOTTOM HINGED WITH L-HANDLE

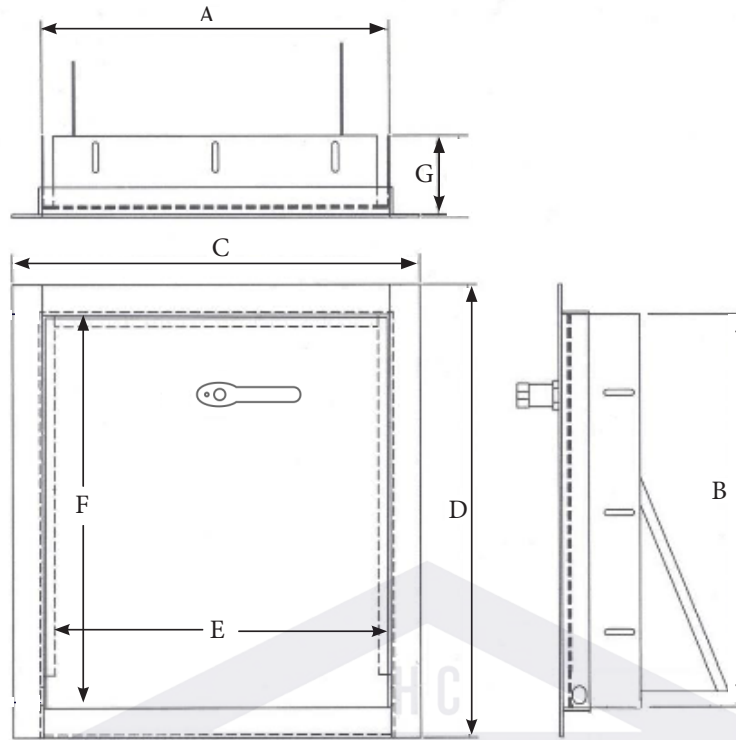

**REPLACEMENT STAINLESS STEEL TRASH CHUTE DOOR DIMENSION CHART**

SIZE	SKU	A	B	C	D	E	F	G	Lbs.	Door/Daylight Opening	Pitson Size/Type	Trim (w)	Recommended Chute Diameter
12"x15"	HR109-BH-L-R-STD	11.38"	14.50"	15.50"	17.75"	11"	13.25"	3.50"	20	10"	8" NC	2.13"	15"
15"x18"	HR209-BH-L-R-STD	14.50"	17.75"	18.75"	21"	14"	16.75"	3.50"	25	16"	10" NC	2.13"	18", 20", 24"
15" x 18" Wide Trim	HR209-BH-L-R-3	14.50"	17.75"	21"	23.25"	14"	16.75"	3.50"	25	16"	10" NC	3.25"	18", 20", 24"

*All measurements in inches with +/-0.07 tolerance*

## KEY FEATURES:

- Chute intake doors are Fire Rated – UL Certified, complying with building codes, "B" label Underwriter Laboratory 1 ½ Hr. rating.
- Stainless Steel 304, 20 Ga, No. 4 Finish
- Chute Replacement Door, Bottom Hinged.
- Hand operated, silent and self-closing by means of an automatic door closer/hydraulic piston.
- Suitable for in-wall, Trash Chute & Linen Chute applications.
- Furnished with attached embossed ADA compliant trim
- Positive self-latching with chrome L-handle with lock
- All Universal style doors are identified by measuring the rough wall opening
- Includes rubber baffle to reduce updraft



718-620-1400



info@oswaldsupply.com



725 Whitter St.  
Bronx, NY 10474  
www.oswaldsupply.com