





# UNIVERSAL STAINLESS STEEL TRASH CHUTE DOOR SKU: HRX09

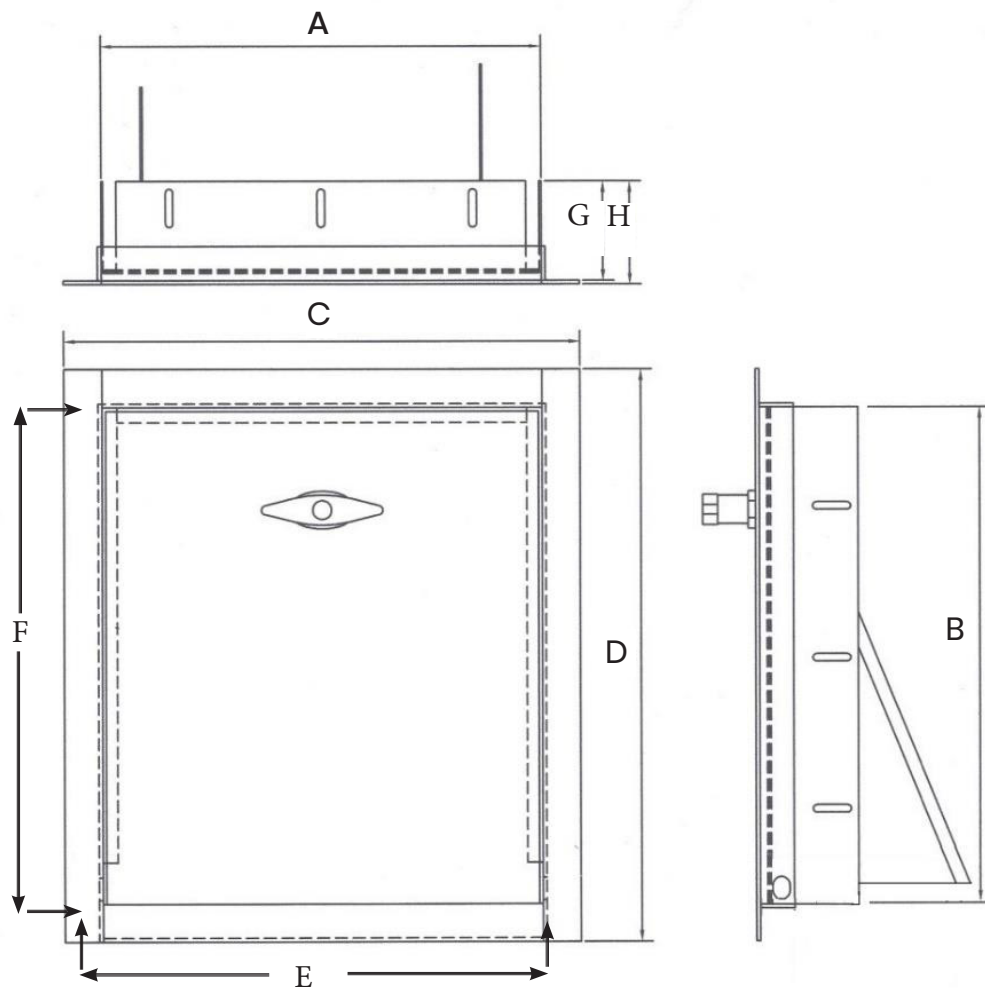

DOOR CLOSER/HYDRAULIC PISTON

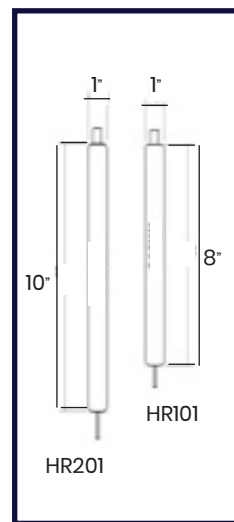

UNIVERSAL STAINLESS STEEL TRASH CHUTE DOOR SKU: HRX09  
DIMENSION CHART

SIZE	SKU	A	B	C	D	E	F	G	H	Lbs.	Door/ Day- light Open- ing	Piston Size/ Type	Standard Connected Trim (w)	Recommnded Chute Diameter
12"x15"	HR109	11.38"	14.50"	15.50"	17.75"	11"	13.25"	3.50"	3.75"	20	10"	8" NC	2.25"	15"
15"x18"	HR209	14.50"	17.75"	18.75"	21"	14"	16.75"	3.50"	3.75"	25	16"	10" NC	2.25"	18", 20", 24"
15" x 18" WIDE TRIM	HR- 209WR	14.50"	17.75"	21"	23.25"	14"	16.75"	3.50"	3.75"	25	16"	10" NC	3.25"	18", 20", 24"

All measurements in inches with +/-0.07 tolerance

## KEY FEATURES:

- Chute intake doors are Fire Rated – UL Certified, complying with building codes, "B" label Underwriter Laboratory 1 ½ Hr. rating.
- No. 4 Stainless Steel Finish
- Chute Replacement Door, Bottom Hinged.
- Hand operated, silent and self-closing by means of an automatic door closer/hydraulic piston.
- Positive self- latching with chrome t-handle with lock
- Rubber Baffle to prevent updraft on 12 x 15 and 15 x 18
- Attached embossed trim on 12 x 15 and 15 x 18 sized doors. Anything over 15 x 18 is furnished with removable trim.
- Suitable for in-wall, Trash Chute & Linen Chute applications.



718-620-1400



info@oswaldsupply.com



725 Whitter St.  
Bronx, NY 10474  
www.oswaldsupply.com