




UNIVERSAL STAINLESS STEEL TRASH CHUTE DOOR, BOTTOM HINGED WITH T-HANDLE

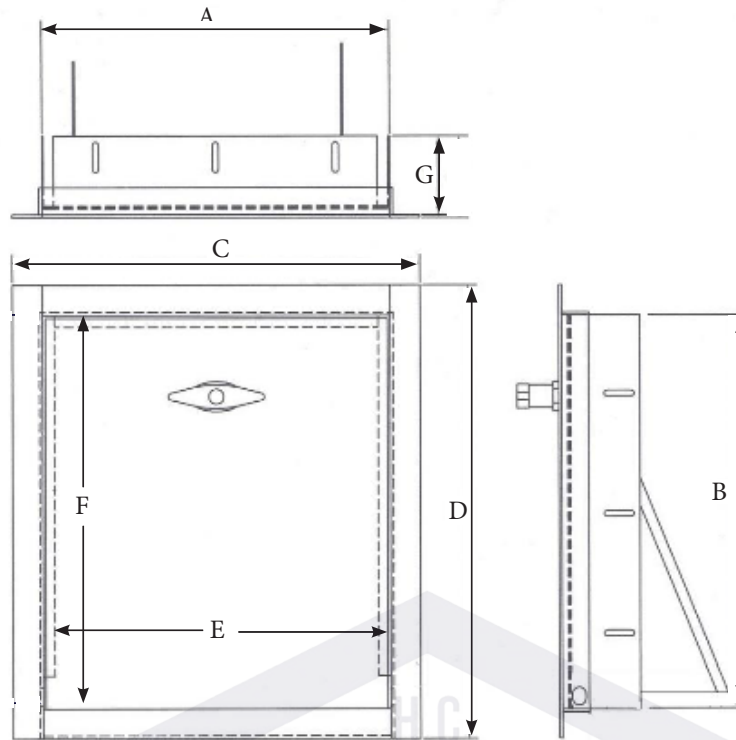

UNIVERSAL STAINLESS STEEL TRASH CHUTE DOOR DIMENSION CHART

SIZE	SKU	A	B	C	D	E	F	G	Lbs.	Door/Daylight Opening	Pitson Size/Type	Trim (w)	Recommended Chute Diameter
12"x15"	HU109-BH-T-R-STD	11.75"	14.50"	15.88"	16.38"	11.50"	13.00"	4.38"	20	10"	8" NO	2.13"	15"
15"x18"	HU209-BH-T-R-STD	14.75"	17.75"	18.88"	20.38"	14.50"	16.00"	4.38"	25	14"	10" NO	2.13"	18", 20", 24"
18" x 18"	HU309-BH-T-R-STD	17.50"	17.75"	21.75"	20.75"	17.5"	16.25"	4.38"	25	15"	10" NO	2.13"	28"
20" x 20"	HU609-BH-T-R-STD	19.88"	19.88"	24"	22.50"	19.75"	19"	4.38"	27	15"	10" NO	2.13"	N/A
21" x 18"	HU409-BH-T-R-STD	20.75"	17.75"	24.75"	21"	20.50"	16.25"	4.38"	28	15"	10" NO	2.13"	30"
21" x 21"	HU809-BH-T-R-STD	20.75"	20.75"	24.75"	23.50"	20.50"	19"	4.38"	35	15"	10" NO	2.13"	N/A
24" x 24"	HU709-BH-T-R-STD	23.75"	23.75"	27.75"	26.50"	23.50"	22"	4.38"	38	15"	10" NO	2.13"	N/A

All measurements in inches with +/-0.07 tolerance

KEY FEATURES:

- Chute intake doors are Fire Rated – UL Certified, complying with building codes, "B" label Underwriter Laboratory 1 ½ Hr. rating.
- Stainless Steel 304, 20 Ga, No. 4 Finish
- Chute Replacement Door, Bottom Hinged.
- Hand operated, silent and self-closing by means of an automatic door closer/hydraulic piston.
- Positive self-latching with chrome t-handle with lock
- ADA L-Handle available
- Removable embossed trim
- Suitable for in-wall, Trash Chute & Linen Chute applications.
- All Universal style doors are identified by measuring the rough wall opening



718-620-1400



info@oswaldsupply.com



725 Whitter St.
Bronx, NY 10474
www.oswaldsupply.com