



SILVERLAND
STONE

'THE STONE PLACE'

Porcelain Laying Technique – 10mm

We Recommend Porcelain is laid as follows:

1. SUB BASE

Option 1

A minimum 75mm of well compacted hard-core base.

Option 2

A minimum 50mm of concrete bed

2. SCREED

Porcelain must be laid on a fully cured screed containing SBR in the mix at a minimum depth of 30mm.

Option 1

Sharp sand screed requiring curing time

Option 2

Larsen's bedding mortar requiring curing time

3. ADHESIVE


10mm combed bed of Larsen's fast set flexible tile adhesive equates to a full 5mm layer.

4. GROUTING

Larsen's universal flexible and exterior grout, using minimum 5mm tile spacers.

5. SEALING

We recommend you seal the grout using 'DRY TREAT STAIN PROOF', however this is not necessary for the tiles.

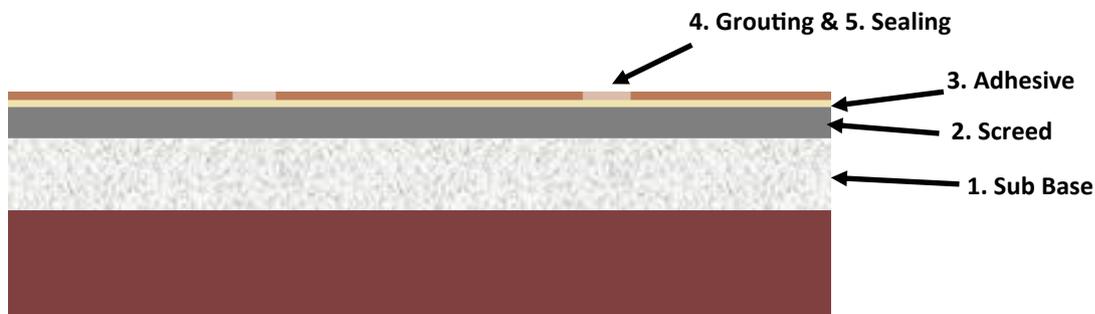

This is the method of laying recommended by Silverland Stone. Please check with your builder/landscaper, as they may have their own technique.



SILVERLAND
STONE

'THE STONE PLACE'

Porcelain Laying Technique – 20mm

We Recommend Porcelain is laid as follows:

1. SUB BASE

A minimum of 100mm of well compacted sub base.

2. BEDDING MORTAR

Sharp sand and cement at a ratio of 5:1, with 250ml SBR added in the mix.

3. PRIMING SLURRY


Paint a thin coat of Watered Down Larsen's tile adhesive on the back of each tile, ensuring that the whole of the back is coated. Place and tap the tile down while both the adhesive and bedding mortar are still wet. This will create a chemical bond between the components.

4. GROUTING

Use Larsen's flexible tile grout, with a minimum gap of 5mm.

5. SEALING

It is recommended that the grout is sealed using 'Dry Treat Stain Proof'. This is not necessary for the tiles.

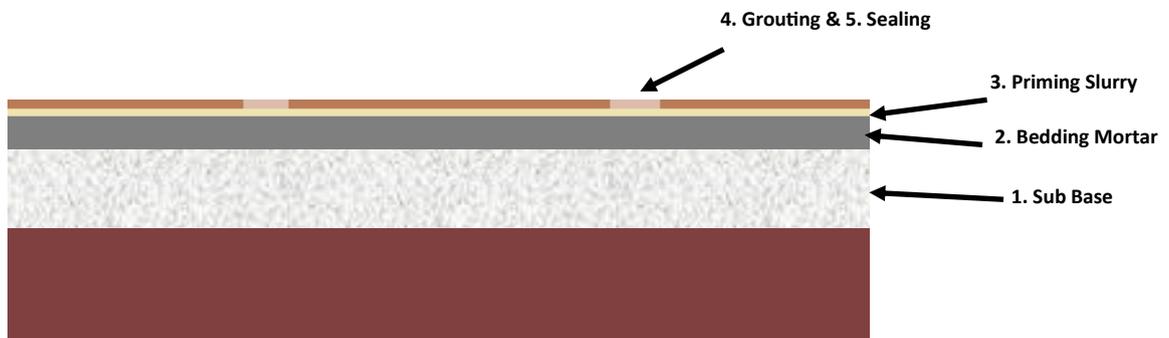

This is the method of laying recommended by Silverland Stone. Please check with your builder/landscaper, as they may have their own technique.