

#### TYPE:

#### **FEATURES**


- Internal and external noise-absorbing materials for enhanced acoustics
- Complete noise-absorbing materials for enhanced acoustics
- Intricate glass diffuser for additional aesthetics
- Subtle raised detailing on thermo-formed light grey PET felt
- A minimalistic design that blends seamlessly into existing design features
- Thermo-formed felt shell manufactured from recycled plastics
- $-\,$  Height adjustable 9'  $/\,$  3m suspension cables and Black woven power cable
- IES photometric files available
- Bluetooth controller available upon request
- White canopy and power cable available upon request

## SIZE AND OUTPUT

	MEDIUM
Delivered Lumen Output	1239lm
Wattage	12W
Efficacy	103 lm/W
CRI	90+
ССТ	3000, 3500, 4000 K
UGR	<6





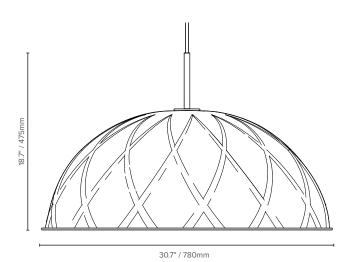

## **ORDER CODE**

EXAMPLE: LX - GE - M - FG - 30 - RD

(Luxxbox Georgina, Medium - Ø30.7" / 780mm x 475 mm, Silver Grey (SG), 3000K, RD

LX - GE									
PRODUCT CODE	SIZE		*SHADE COLOR	COLOF	RTEMP	DRIVE	R / DIMMING	DRIV	ER TYPE
GE	М	Ø30.7" / 780mm x 475 mm	SG - Silver Grey	30 35 40	3000K 3500K 4000K	UNV G	0 - 10V - 1% dimming (120-277V) ( <i>North America only</i> ) 1% dimming DSI/DALI (220 - 240V)**	CD RD	Canopy concealed driver (UNV/North America only) Remote driver (UNV or G)
				E26 E27			120V AC (North America only) 220-240V AC (Global)		ase note the globe or driver will not be blied with the E26/E27 option for this re.

 $^{\ast\ast}$  Global (G) dimming type is only available with Remote driver (RD)

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply, All rights reserved © All dimensions and values on specification



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM WWW.LUXXBOX.COM













TYPE:

## **FELT FINISH**

This version doesn't include any upholstery or stitching. In this instance, the inside of the shade will be in the same color/finish as the outside, Silver Grey (SG)

#### **FELT FINISH**


INSIDE **OUTSIDE** SG SG

## **PHOTOMETRICS**

#### LIGHT SOURCE SPECIFICATIONS

	MEDIUM
Delivered Lumen Output	1228lm
Wattage	11.59W
Efficacy	106 lm/W
CRI	90+
ССТ	3000, 3500, 4000 K
MAX UGR	14.8

#### LUMINOUS INTENSITY DISTRIBUTION



## **DRIVER INFORMATION**

10% DIMMING (110 - 277V)			
SIZE	WATTS	OUTPUT	COMPLIANCE
MEDIUM	12W	22-42VDC	C UL US

1% DIMMING (DALI ) (220 - 240V)			
SIZE	MAX OUTPUT WATTAGE	MAX OUTPUT VOLTAGE	COMPLIANCE
MEDIUM	12W	22-42VDC	& CE PS TRALE

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM LUXXBOX PTY LTD imes (P)+61 7 3257 2822 imes INFO@LUXXBOX.COM WWW.LUXXBOX.COM















TYPE:

## PRODUCT ACOUSTIC PROPERTIES


Testing and post analysis procedures were carried out in accordance with the references detailed below:

AS ISO 354-2006 (R2016)	Acoustics—Measurement of sound absorption in a reverberation room
AS ISO 11654-2002	Rating of sound absorption—Materials and systems
ASTM C423-17	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
ASTM E795-16	Standard Practices for Mounting Test Specimens During Sound Absorption Tests
ISO 20189	Screens, furniture and single objects intended for interior use – Rating of sound absorption and sound reduction of elements based on laboratory measurements.

Below you'll find the data for both sizes of this product in Imperial and Metric units. Please note we this data has been extrapolated from the results obtained in the testing of the Helm pendant as we are using the same combination of materials in both products.


#### IMPERIAL SABINS

FREQUENCY (HZ)	SOUND ABSORPTION COEFICIENT	MEDIUM (M)
125	0.03	0.67
250	0.64	12.28
500	0.40	7.72
1000	0.58	11.17
2000	0.65	12.50
4000	0.78	14.90



#### METRIC SABINS

FREQUENCY (HZ)	SOUND ABSORPTION COEFICIENT	MEDIUM (M)
125	0.03	0.06
250	0.64	1.14
500	0.40	0.72
1000	0.58	1.04
2000	0.65	1.16
4000	0.78	1.38



The Sabin data shown above is in accordance with the latest International Standards for the rating of sound absorption and reduction. This is different from the classic methodology, which includes the calculation of the Noise Reduction Coeficient (NRC), the Sound Absorption Average (SAA), the Weighted Sound Absorption Coefficient (aw) and the Sound Absorption Class (SAC). However, to make it easier to compare against other products, we are including that information on the table on the right, which was calculated using the Largest Single Face method. Fully detailed test reports are available upon request.

NRC	0.6
SAA	0.58
AW	0.60
SAC	С

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification



















TYPE:

## PRODUCT DIMENSIONS

The linework shown for the intricate pattern of the shade is for visualisation purpose only. Actual embossing on the finished product has a smooth transition as shown in product images.

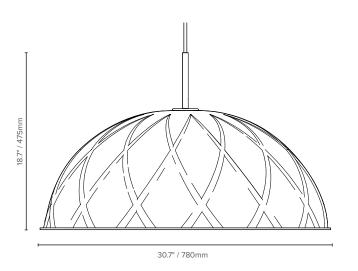



UNDERSIDE VIEW

### **CANOPY INFORMATION**

Please note power cord and canopy will always be supplied in black unless specified otherwise.

PRODUCT SIZE OUTPUT RD CD E26 R		
TROBUST SIZE SOTTOT RD	) E2	27
LX-GE ALL SIZES D SA1 CD9 SA1 S	1 SE	B1



Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification



LUXXBOX USA INC × (P)+1 (415) 871 0448 × USA@LUXXBOX.COM LUXXBOX PTY LTD × (P)+61 7 3257 2822 × INFO@LUXXBOX.COM WWW.LUXXBOX.COM









