

### RTT MOUNTING KIT

**INSTRUCTIONS GUIDE** 




# RTT MOUNTING KIT ASSEMBLY



#### STEP 1

LOOSEN EACH CROSS BAR ON YOUR VEHICLE'S ROOF RACK THAT YOUR HEAVY DUTY TENT MOUNTS WILL BE PLACED ONTO. FOR EACH HEAVY DUTY TENT MOUNT USE (6) 1/4"-20 X .625" CARRIAGE BOLTS. SLIDE THREE CARRIAGE BOLTS ONTO ONE MOUNTING RAILS AND THE OTHER THREE ON THE ADJACENT CROSS MEMBER.

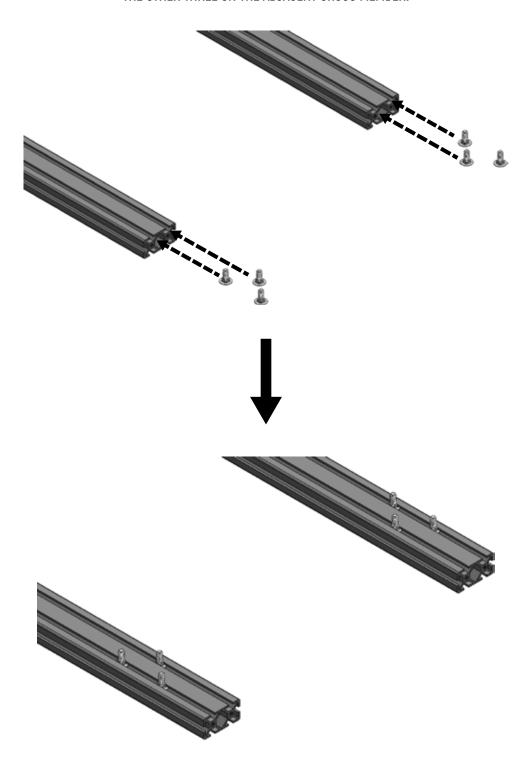




# RTT MOUNTING KIT ASSEMBLY



STEP 2

PLACE (6) 1/4" ID WASHERS AND (6) 1/4"-20 LOCK NUTS ONTO EACH CARRIAGE BOLT. LEAVE LOOSE UNTIL STEP 3.

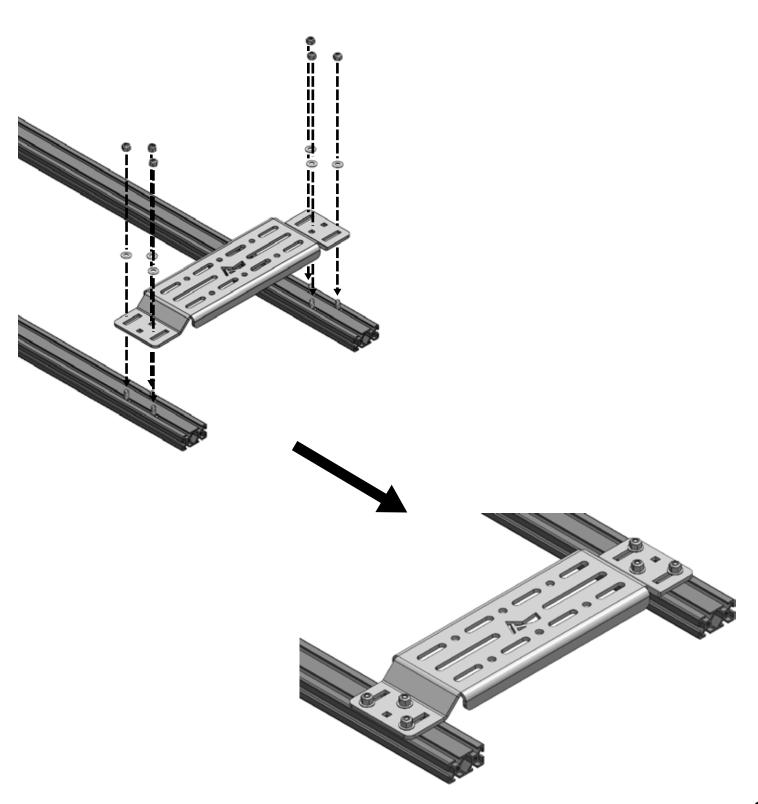



## RTT MOUNTING KIT ASSEMBLY



STEP 3

MEASURE THE ROOFTOP TENT MOUNTING RAILS FROM CENTER TO CENTER. SUBTRACT THAT NUMBER FROM THE OVERALL WIDTH OF ROOF RACK AND DIVIDE IT BY TWO. THE FINAL VALUE WILL GIVE A DISTANCE FROM THE ROOF RACK'S OUTSIDE SIDE FAIRING TO THE CENTER OF THE HEAVY DUTY TENT MOUNT. THIS WILL ENSURE PROPER ALIGNMENT WHEN PLACING ON THE ROOF TOP TENT. REPEAT THIS STEP FOR EACH HEAVY DUTY TENT MOUNT. FASTEN DOWN ALL LOOSE HARDWARE AT THIS TIME.

