


Technical Documentation

FD0014

Farm Duty | BECCFD

Date: April 16, 2021

 MOTORS (CANADA) INC.	
	Date: April 16, 2021

Technical Data Sheet

Motor Type: BECCFD	Catalogue No: FD0014
--------------------	----------------------

Nameplate Information

HP	Pole	RPM	Frame	Voltage	Hz	Phase
1	4	1750	56	115 / 230	60	1
Enclosure	Ins. Class	Service Factor	Time Rating	NEMA Design	Rated Amb.	Rated Altitude
TEFC	F	1.15	Continuous		-40 to 40 °C	<1000 m

Typical Performance

Efficiency (%)				Power Factor (%)		
Full Load		3/4 Load	1/2 Load	Full Load	3/4 Load	1/2 Load
Nom.	Min.					
70.00				66.00		
Torque				Current (A)		
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	No Load	Full Load	Locked Rotor
0.42	290		270		14.0 / 7.0	68.00 / 34.00
NEMA KVA Code	Inertia (WR ²)			Safe Stall Time (s)		Noise Level Sound Press. dB(A)
	Rotor (lb-ft ²)	NEMA Load (lb-ft ²)	Max. Allowable (lb-ft ²)	Cold	Hot	
	0.109					

VFD Duty Information

Speed Range			VFD		S.F.
Constant Torque	Variable Torque	Constant Power	Carrier	Type	
			0		

Hazardous Locations Information

Temp Code (Sinewave / VFD)	/
----------------------------	---

Additional Certifications

Other Certification

Additional Information



Bearings		Approx. Weight
DE	NDE	lbs
6205ZZ	6203ZZ	48

Nameplate Drawing

Farm Duty

TYPE	BECCFD	CAT. NO.	FD0014		
OUTPUT	1 HP 0.75 kW	FRAME	56	TEFC	
R.P.M.	1750	POLE	4	INS.	F
VOLTS	115 / 230	PHASE	1	Hz	60
AMPS	14.0 / 7.0	CODE		S.F.	1.15
AMBIENT	40 °C	NOM. EFF. 70.00		MIN. EFF.	
BEARINGS	6205ZZ / 6203ZZ			RATING Cont.	
SER. NO.	TBD	DESIGN		WT. 48 LBS	
PWM VFD DUTY	VT	CT	CP	S.F.	

Connection Diagram

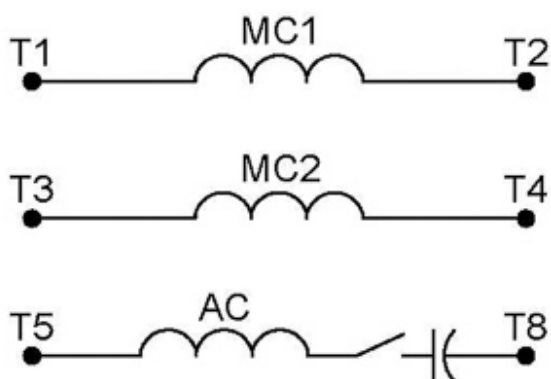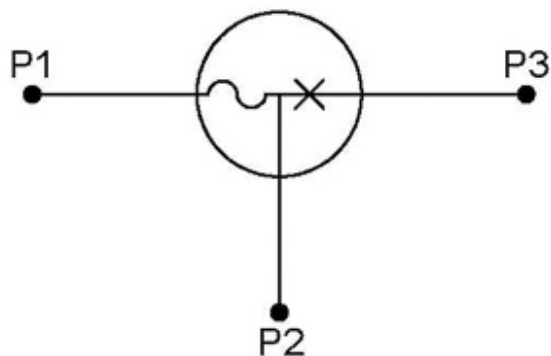

9 LEAD DUAL VOLTAGE		CAPACITOR START		
VOLTAGE	ROTATION	L1	L2	JOIN
HIGH	CCW	P1	4	2&3&5, P2&8
	CW	P1	4	2&3&8, P2&5
LOW	CCW	P1	2,4,5	P2,3,8
	CW	P1	2,4,8	P2,3,5

WD_9CS