

# SAL187 LED Area Light


MODEL# AEISAL187

JOB NAME

JOB NUMBER

DATE





Shown with Extruded Mounting Arm

# **SPECIFICATIONS**

### HOUSING

- •Heavy-Duty Die Cast Aluminum Housing and Front Frame
- •Integral Heat-Sinking Driver Compartment
- •Textural Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating
- Photocell Adaptable

#### **LENS**

Clear Flat Glass Lens or Clear Flat Prismatic Glass Lens

### MOUNTING

Mount with Two-Piece Swivel Bracket, Adjustable Slipfitter, Extruded Mounting Arms, Yoke or Mounting Arm Adaptor

#### **APPLICATIONS**

- All Outdoor Areas
- Moist & Damp Environments
- Parking Lots & Garages
- Office Park & Campus Walkways

# **OPTIONS**

- Surge Protection
- Custom Colors Available Upon Request

## LumaFit LED

•Array Lumens: 174W: 17,000

286W: 28,303

•Delivered Lumens: 174W: 16,954 (F, Clear)

286W: 25,462 (F, Clear)

•CRI: 72

•CCT: 5000K

•Rated Life: 50,000 Hours

•5-Year Warranty

Aluminum Boards

# WATTAGE

•174W: Array: 175.2W, System: 187W •286W: Array: 285W, System: 302.4W

### **DRIVER**

- •Electronic Driver 120-277V, 50/60Hz
- Dimmable Driver

# LISTING & RATINGS

CSA: Listed for Wet Locations LM70 Report Available on Select Models












### ORDERING GUIDE

#### SAL187-F-1X-187-UNI-5K-CL-Z-LY Ordering Example:

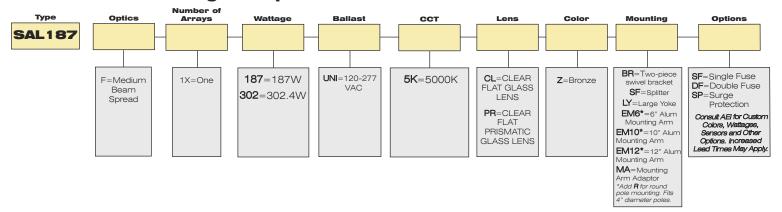




# SAL187 LED Area Light


MODEL# AEISAL187

# **PHOTOMETRY**


### Model AEISAL187-F-1X-187-UNI-5K-CL (187W)



# Model AEISAL187-F-1X-302-UNI-5K-CL (302W)



# LIGHTING FACTS

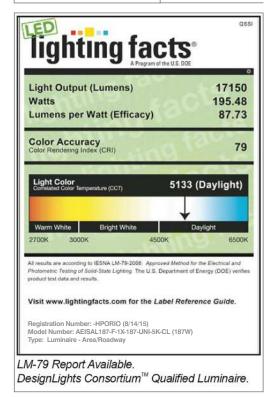

### **ACCESSORIES**











