

INSTALL GUIDE.

Exhaust Valve Mk8 Fiesta ST

mountune

TOOLS REQUIRED:

Fitting time: 5 minutes




- Phillips / flat-blade screwdriver

Step 1



Using a flat-blade screwdriver, turn the valve so it is in the open position.

Step 2

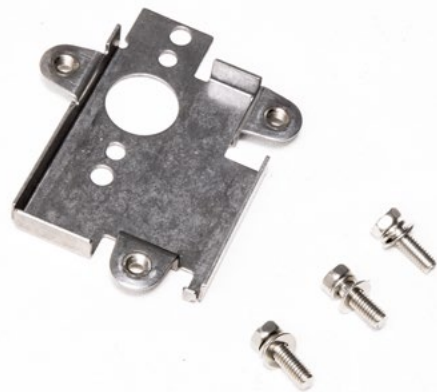

Find the enclosed valve plate and remove the three valve-motor securing bolts.

Step 3



Place the exhaust valve plate in place (as shown) and secure to the valve-motor assembly with the two supplied bolts.

Step 4




With the valve in the open position, push the link rod into place on the valve cut-out, as shown.

Step 5



Remove your OE valve-motor from the OE exhaust by undoing the three locating bolts. Push it into place on your new exhaust valve. The two slots should now be aligned, as shown.

Step 6

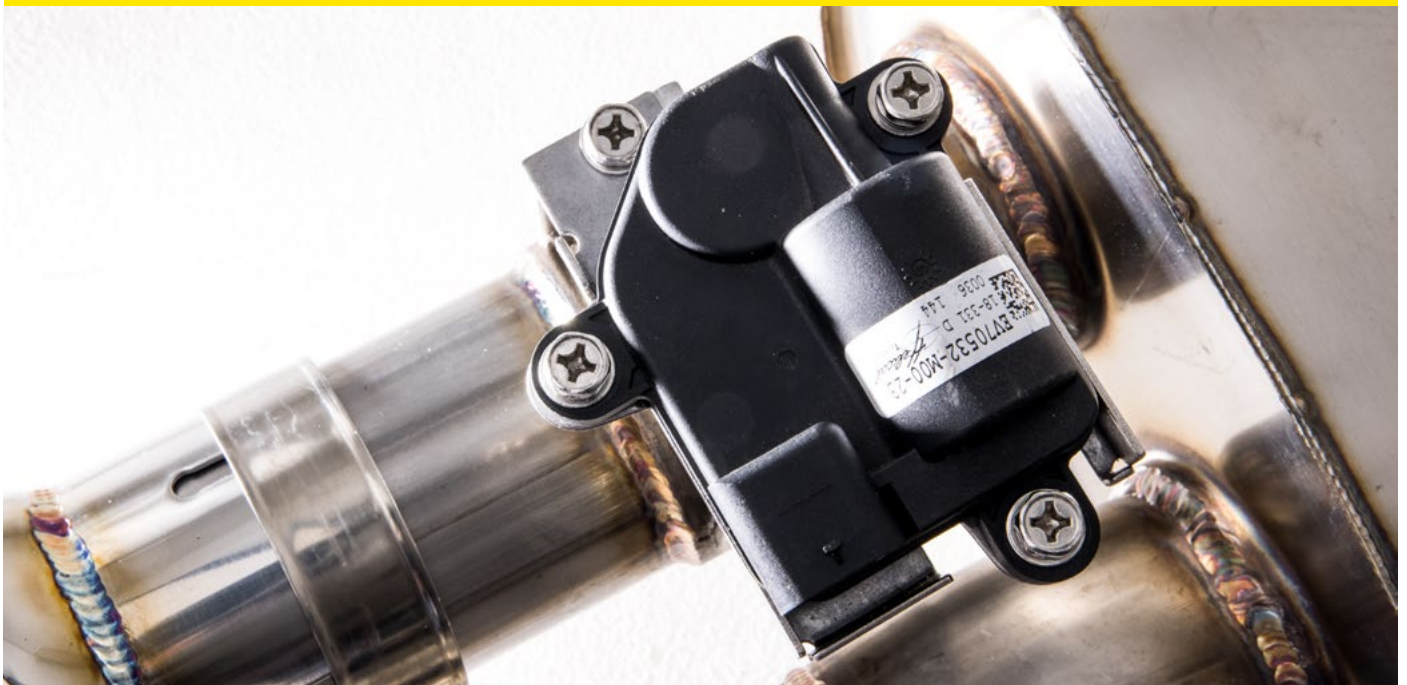

Once the link rod is seated correctly on both sides (this will be an interference fit), tighten the three valve-motor locating bolts - you're ready to install your new mountune exhaust.