

How to Change a Patio Door Handle

Health & Safety

Take care not to trap your fingers in the door edge when changing the handles.



Tools Required

Cross head screwdriver
(Phillips PH2 or Pozidriv PZ2)

Thin bladed implement is required to remove screw covers


Step One



Working with the door slid open, loosen the fixings on the inner half of the handle.


Step Four

Assemble handle to the correct formation for your door.

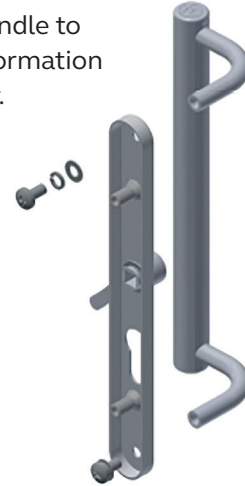

Step Two

Carefully remove the fixings and the inner handle.

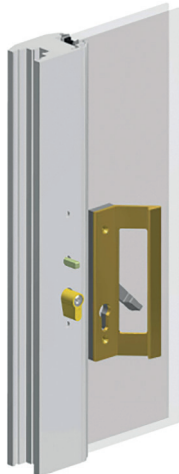

Step Five

Fit replacement outer handle over the cylinder, insert the spindle also. The handle should sit flush against the door.



Step Three

Remove the outer handle. If the spindle is still between the lock case, remove this also.



Step Six

Fit the replacement inner handle. Once sitting flush, insert the screws, tighten until pinch tight.

